


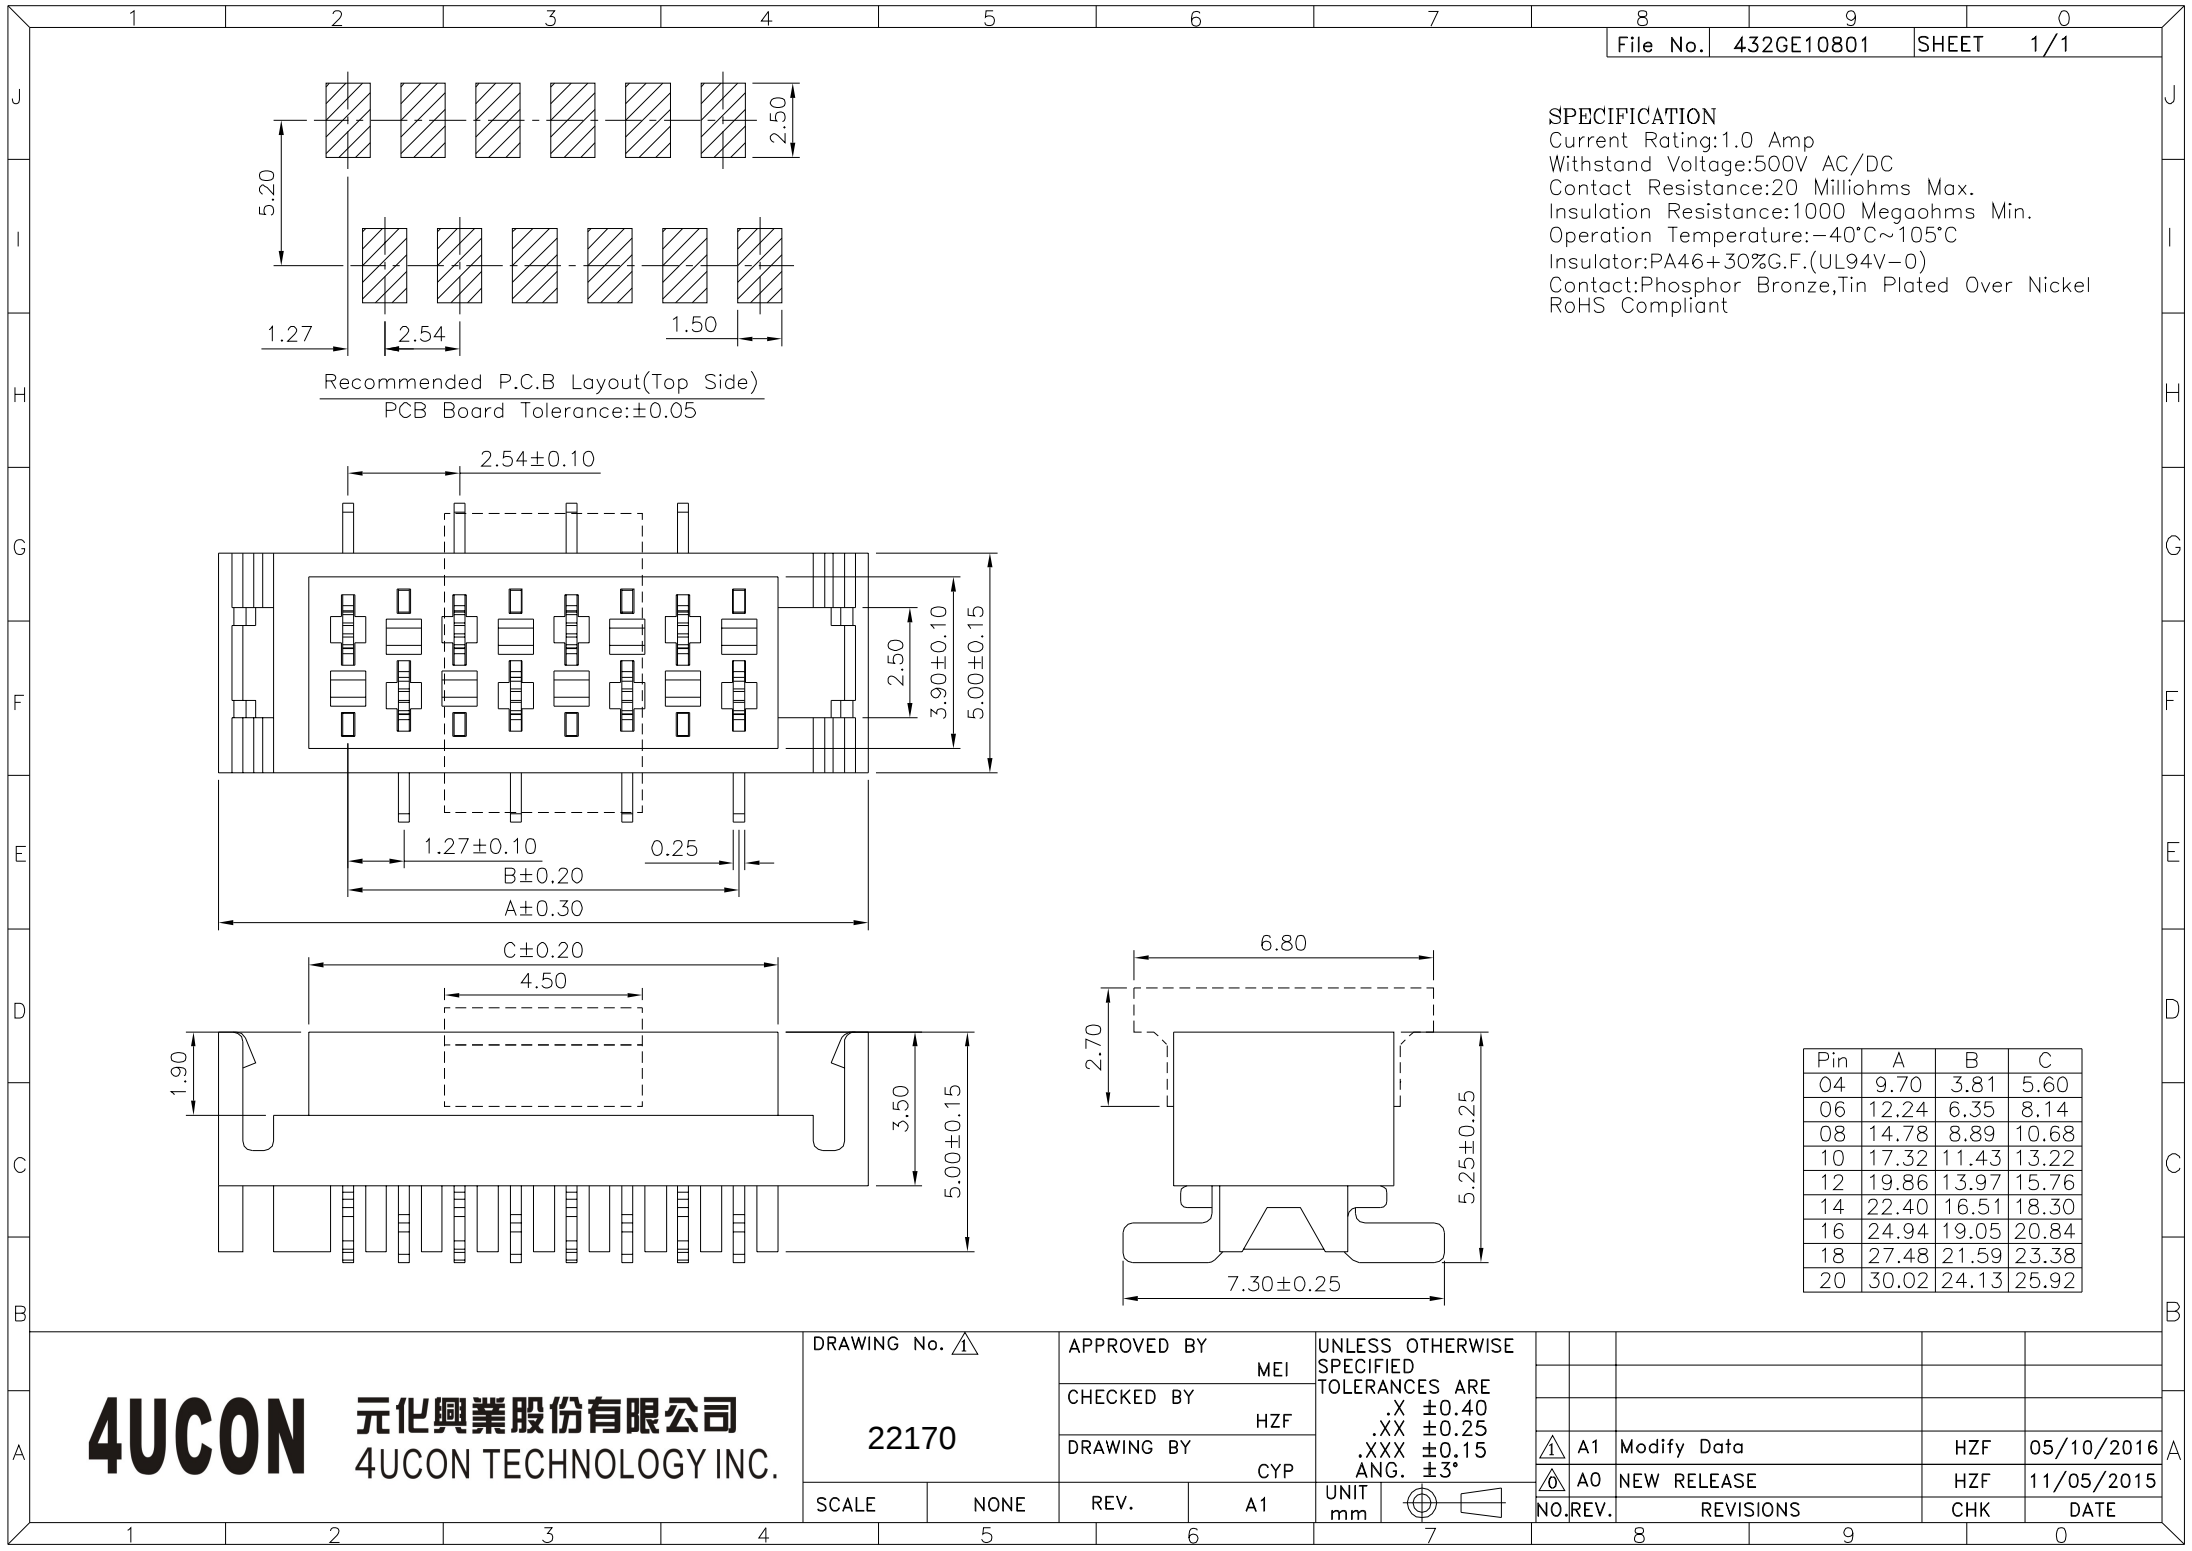

SPECIFICATION
Current Rating:1.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~105°C
Insulator:PA46+30%G.F.(UL94V-0)
Contact:Phosphor Bronze,Tin Plated Over Nickel
RoHS Compliant

Recommended P.C.B Layout(Top Side)
PCB Board Tolerance:±0.05

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 22170

APPROVED BY MEI
CHECKED BY HZF
DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.40
.XX ±0.25
.XXX ±0.15
ANG. ±3°

SCALE NONE REV. A1

UNIT mm

	A1	Modify Data	HZF	05/10/2016
	A0	NEW RELEASE	HZF	11/05/2015
NO. REV.	REVISIONS		CHK	DATE