
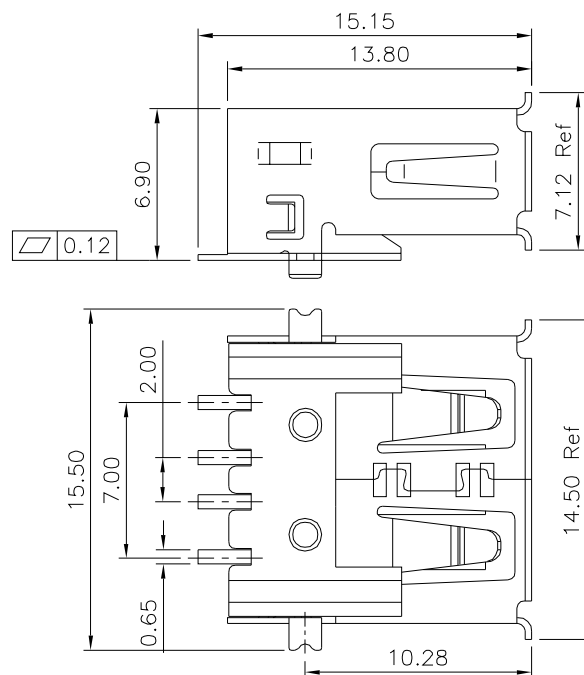
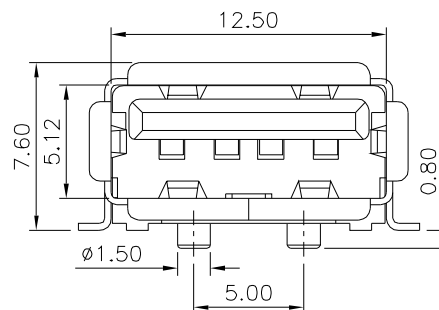


SPECIFICATION

Current Rating:1.5A
Voltage Rating:30V Max.
Withstanding Voltage:500V AC For 1 Minute
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-55°C~+85°C
Mating Force:35N Max.
Withdrawal Force:10N Min.
Durability:1500 Cycles Min.
Contact:Brass
Gold Flash On Contact Area,
Tin Plated On Solder Tails,Over Nickel
Insulator:LCP+30%G.F.(UL94V-0),Black
Shell:Brass,Nickel Plated Over All
RoHS Compliant

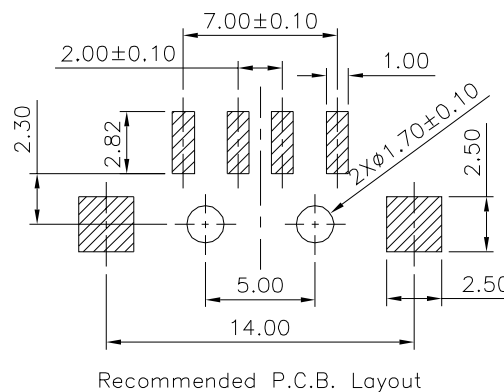

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22182

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38 X. ±3*
.XX ±0.25 .X* ±2*
.XXX ±0.13 .XX* ±1*

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

△ A0

NEW RELEASE

HZF

03/09/2021