



SPECIFICATION



Current: 3A
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Withstanding Voltage: 1000V AC/Minute
 ⚠ Operation Temperature: -40°C~+105°C
 Housing: PA6T(UL94V-0), Black
 Contact: Brass, Gold Flash Over Nickel
 No. Of Contacts: 02~40 Contacts
 RoHS Compliant

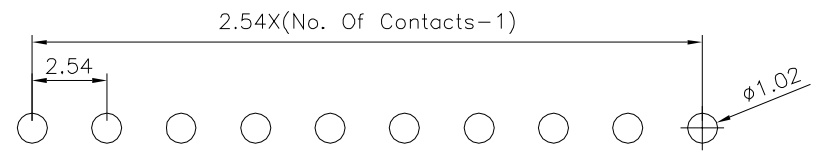

Recommended P.C.B. Layout

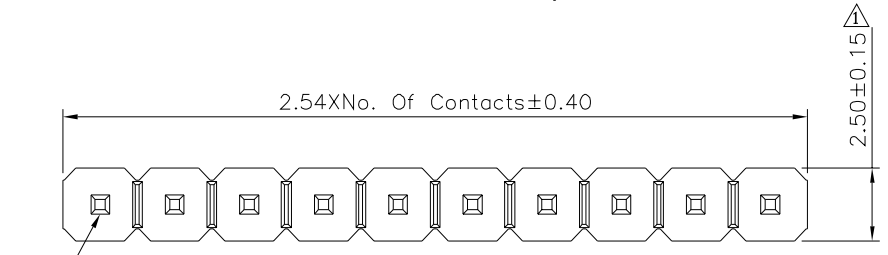

Pin1

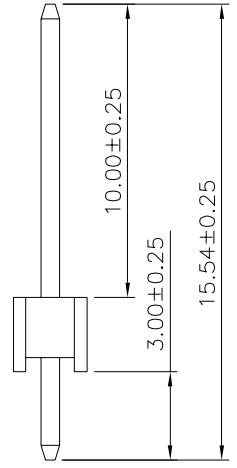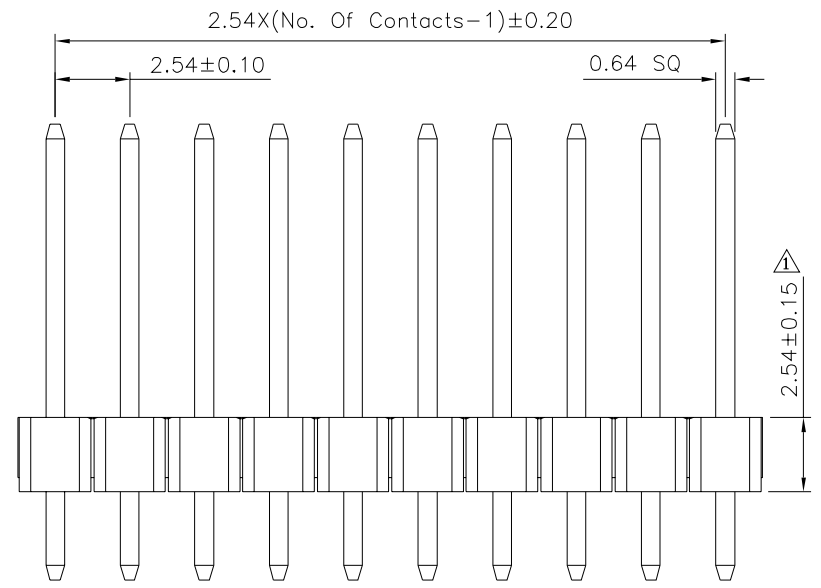

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 .XXX ±0.05
22187		EMILY		
		CHECKED BY		
SCALE		DRAWING BY		UNIT mm
NONE		CYP		
REV.	A2	REV.		NO. REV.
				REVISIONS
				CHK
				DATE

NO. REV.	REVISIONS	CHK	DATE
⚠ A2	Modify Data	HZF	11/01/2024
⚠ A1	Modify Data	HZF	09/16/2021
⚠ A0	NEW RELEASE	HZF	10/02/2014