

SPECIFICATION

Current Rating:9A AC/DC

Voltage Rating:600V AC/DC


Withstand Voltage:1500V AC/Minute

Insulation Resistance:1000 Megaohms Min.


Insulator:PA66,UL94V-2,Nature Color

Contact:Brass,Tin Plated

RoHS Compliant




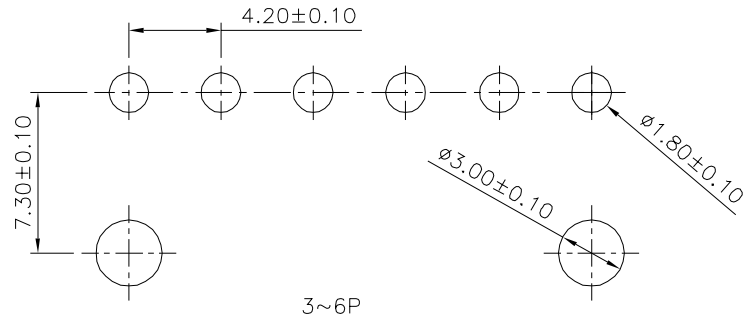


3~6P

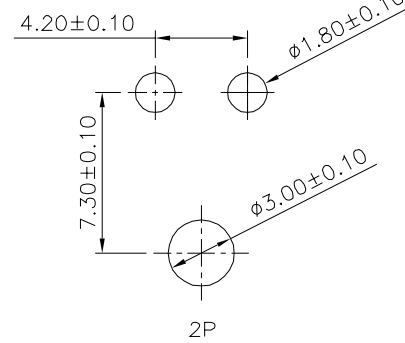


2P


Recommended P.C.B. Layout

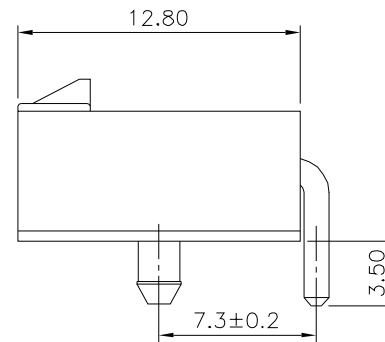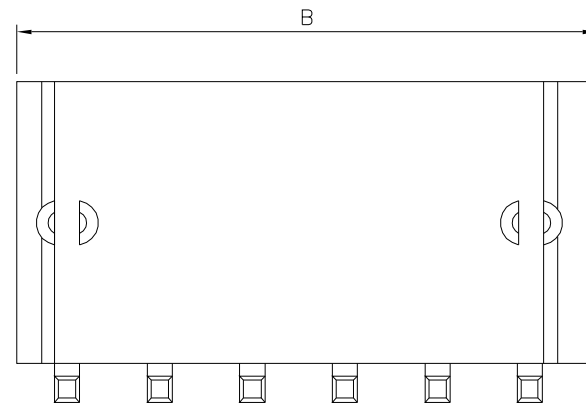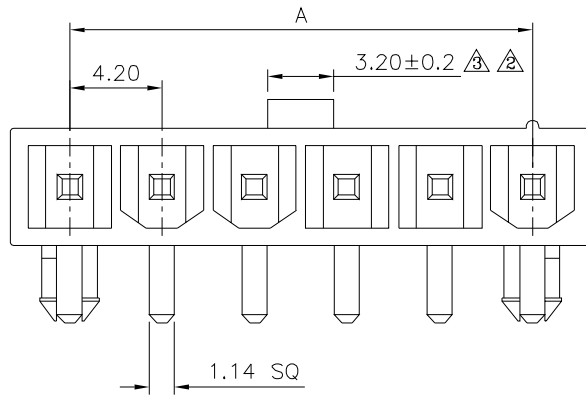


2P




3P



4P

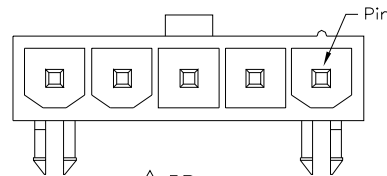

5P

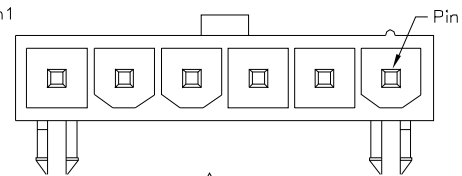

6P

Circuit	A	B
2	4.20	9.60
3	8.40	13.80
4	12.60	18.00
5	16.80	22.20
6	21.00	26.40

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 22241

22241

SCALE NONE

APPROVED BY MEI


CHECKED BY HZF

DRAWING BY CYP

REV. A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.30
.XX ±0.20
.XXX ±0.10
ANG. ±2°

UNIT mm



NO. REV.

REVISIONS

A3

Modify Data

HZF 03/03/2021

A2

Modify Data

HZF 12/19/2014

A1

Modify Data

HZF 09/19/2011

A0

NEW RELEASE

HZF 06/26/2009

CHK

DATE