
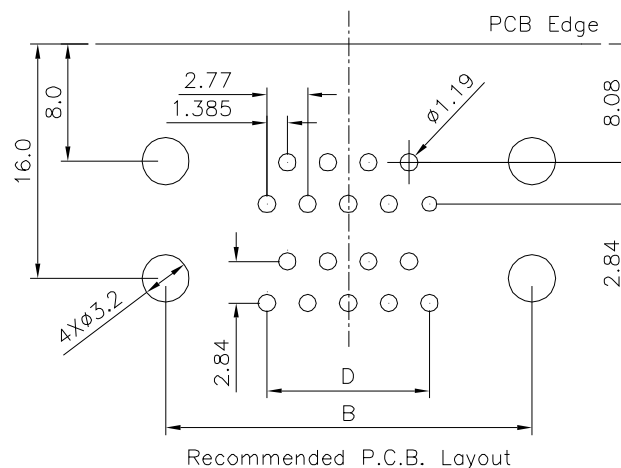
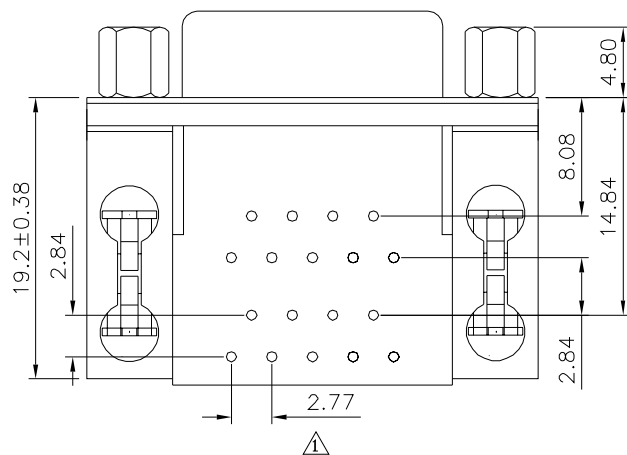
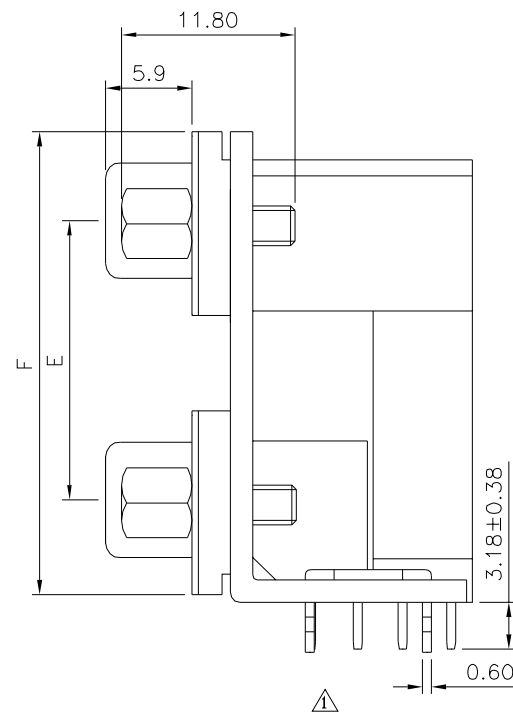


△ SPECIFICATION

Operation Voltage:250V AC Max.
 Current Rating:3A Max.
 Dielectric Withstanding Voltage:1000V AC/Minute
 Insulation Resistance:1000 Megaohms Min. At 500V DC
 Contact Resistance:30 Milliohms Max.
 Temperature Range:-55°C~+105°C
 Insulator:PBT(UL94V-0)
 Contact:Brass
 Gold Flash On Contact Area,
 Tin Plated On Solder Tails,Over Nickel
 Shell:Steel,Nickel Plated
 Bracket:Zinc Alloy,Nickel Plated
 Rivet Boardlock:Brass,Tin Plated
 Screw:Ferroalloy,Nickel Plated
 RoHS Compliant

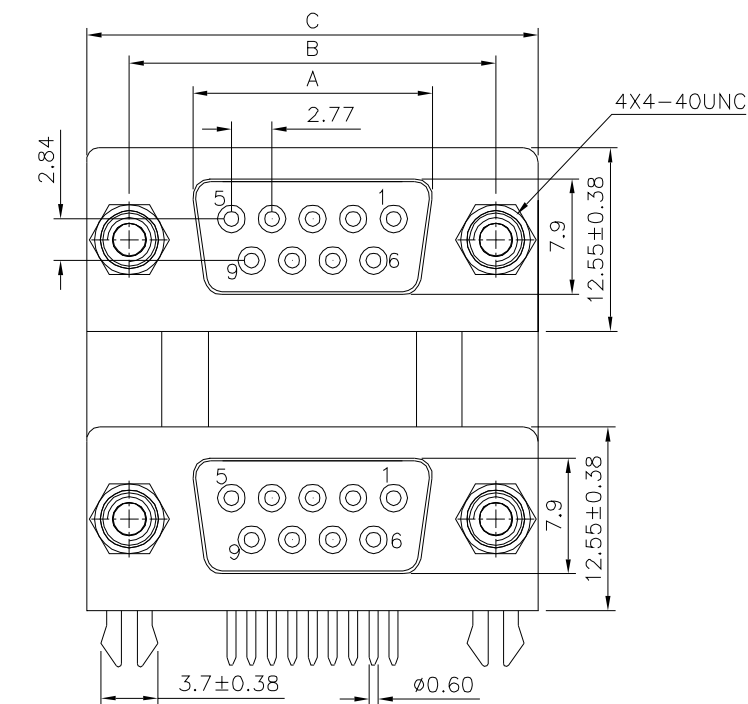

Port Spacing	Position	E±0.15	F±0.15
15		15.88	28.43
19		19.05	31.60
22		22.86	35.41

Pin	A±0.20	B±0.20	C±0.38	D
0909	16.30	25.00	30.80	11.08
1515	24.60	33.30	39.20	19.39
2525	38.35	47.05	53.05	33.24
3737	54.80	63.50	69.40	49.86

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22301

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

B1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 ANG. 0.38
 RADIUS 0.38
 HOLE 0.25
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ B1		Modify Data	HZF	03/20/2025
△ B0		NEW RELEASE	HZF	03/26/2019