
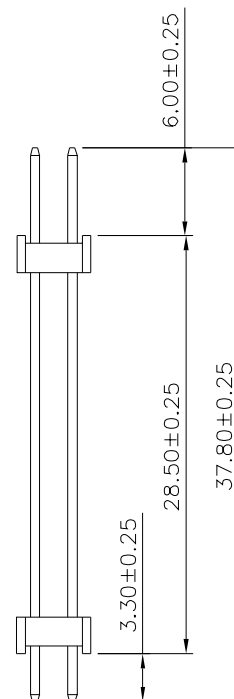


SPECIFICATION

Current Rating:3 Amps
 Withstand Voltage:AC 1000V Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operating Temperature:-40°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

Recommended P.C.B. Layout(Top View)

(PCB Board Tolerance±0.05)

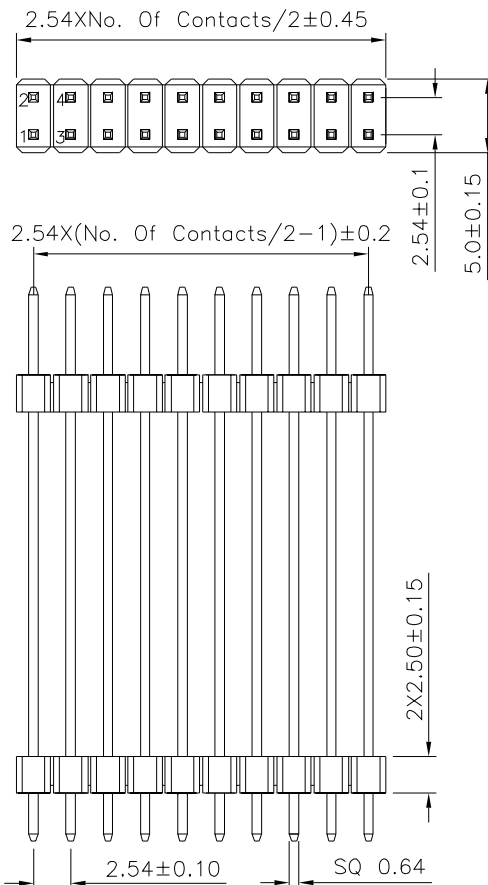

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22314

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

LZX

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X.	±0.25	X.*	±2*
.X	±0.20	.X*	±1.5*
.XX	±0.15	.XX*	±1*
.XXX	±0.10	.XXX*	±0.5*

SCALE

NONE

REV.

A0

UNIT

mm

NO.

REV.

NO.

REV.

NEW RELEASE

REVISIONS

CHK

DATE

HZF

04/22/2022