


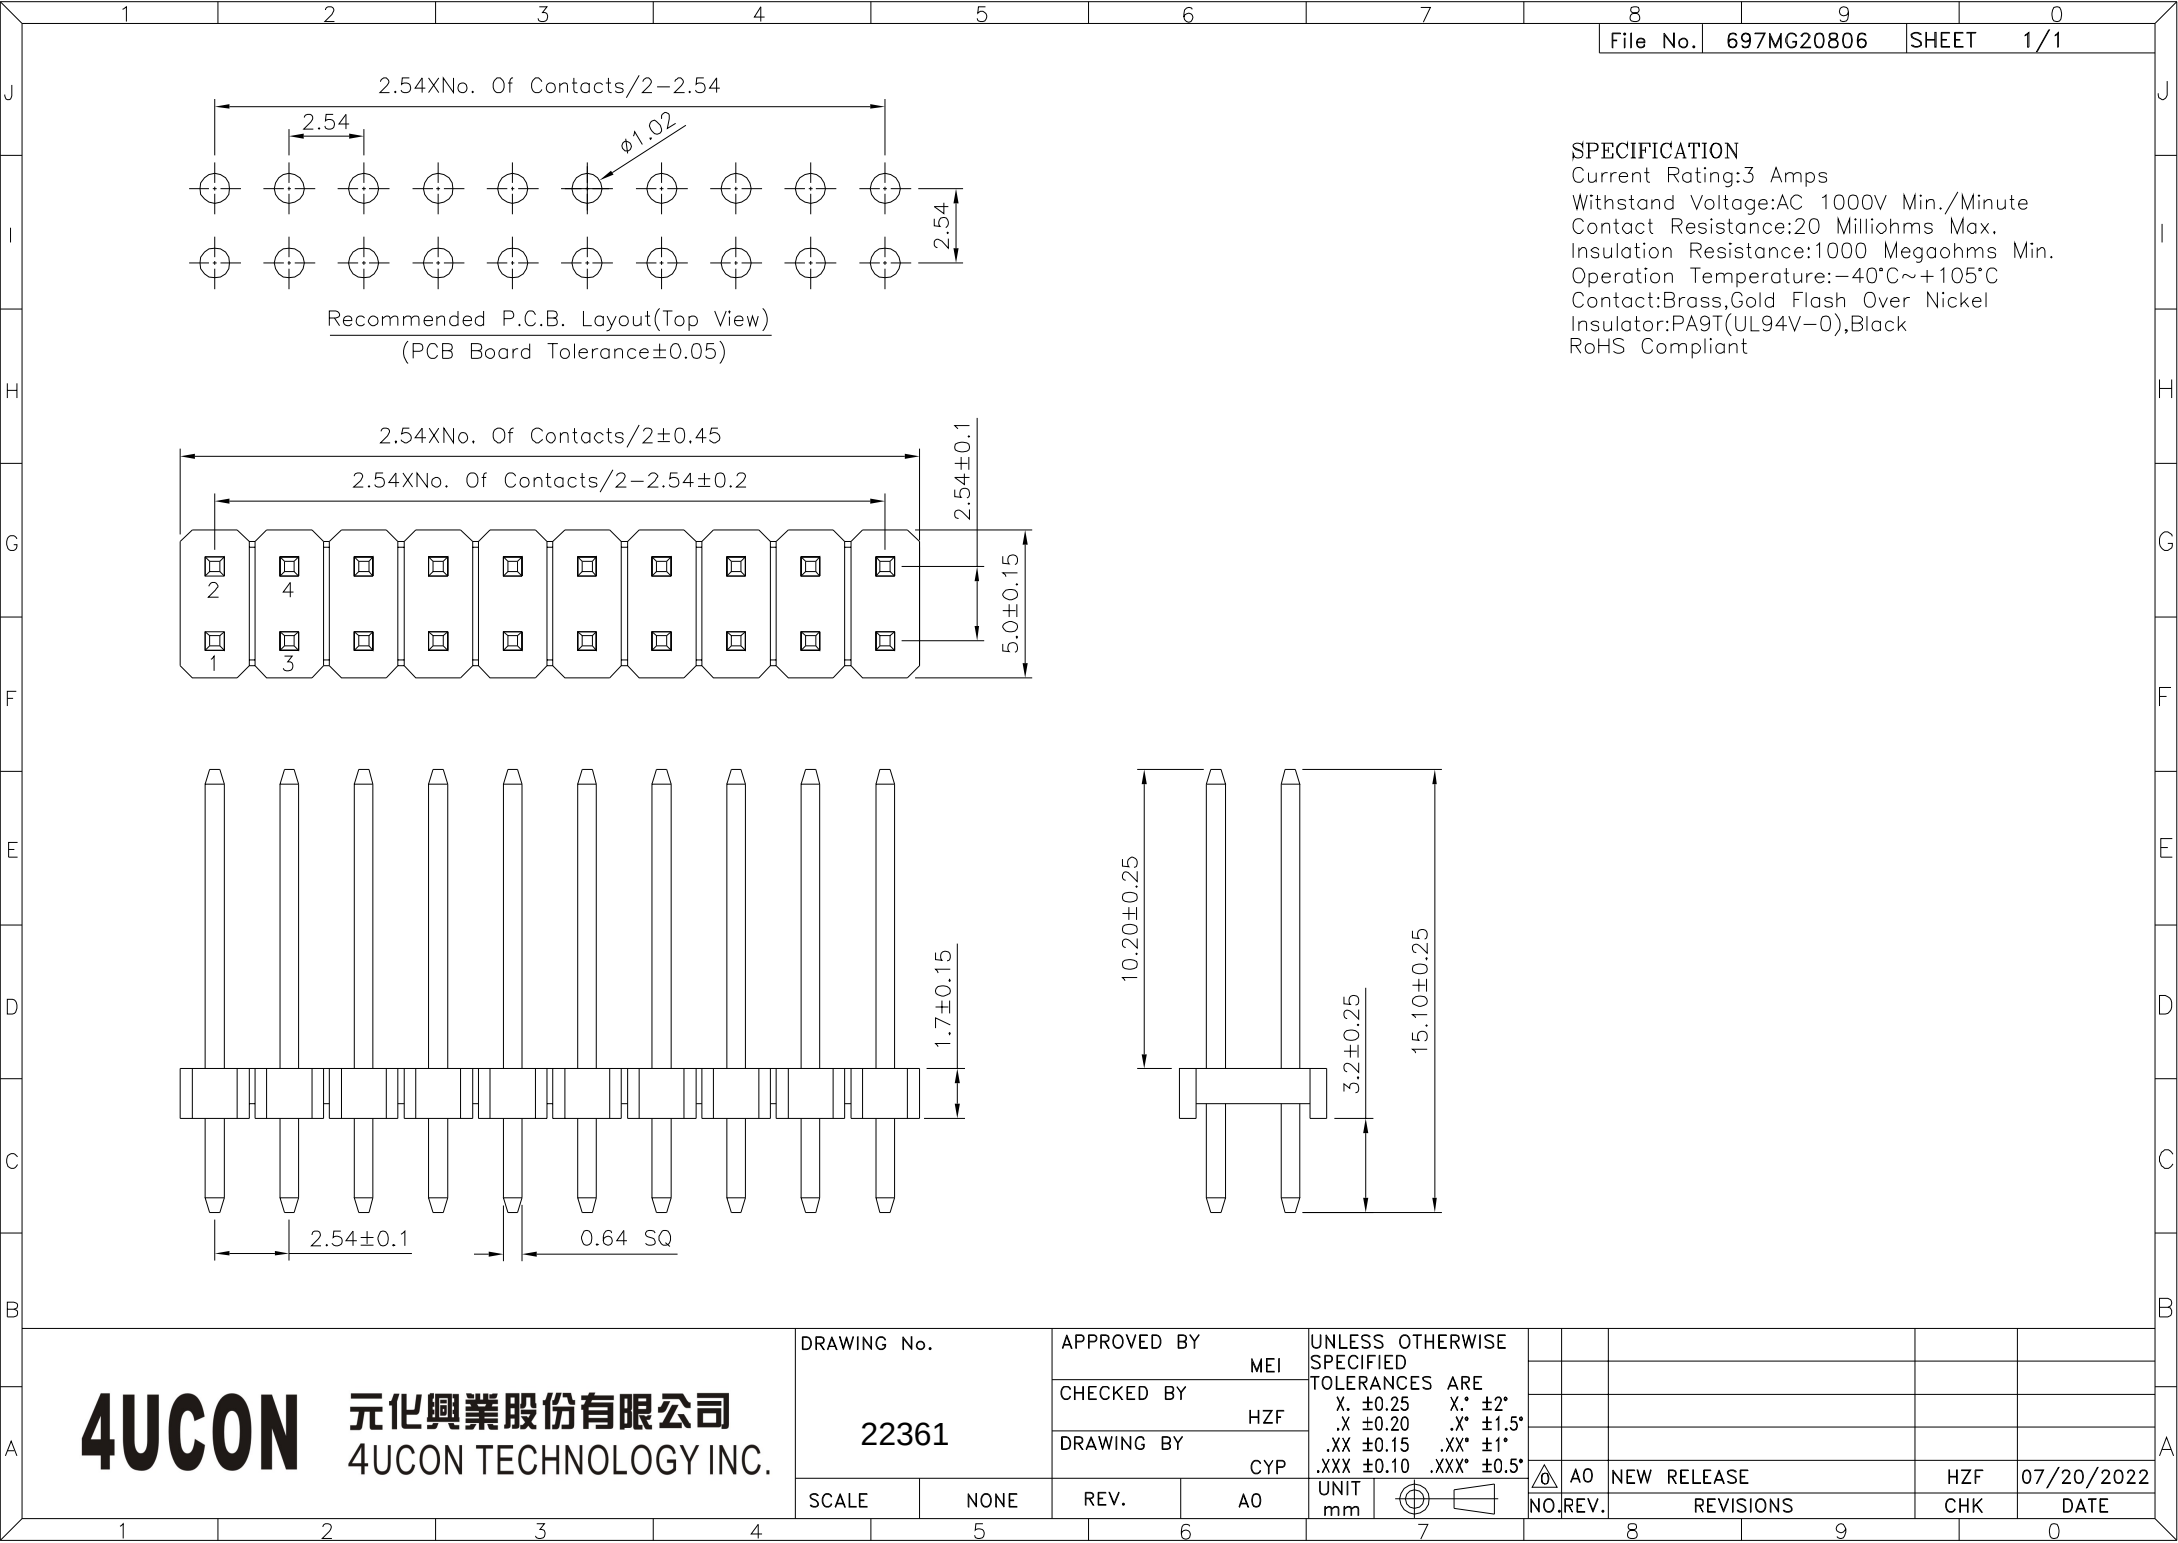

SPECIFICATION
Current Rating:3 Amps
Withstand Voltage:AC 1000V Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA9T(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE								
		MEI										
		CHECKED BY										
		HZF										
22361		DRAWING BY		.X. ±0.25 .X.* ±2°								
		CYP		.X ±0.20 .X.* ±1.5°								
				.XX ±0.15 .XX* ±1°								
				.XXX ±0.10 .XXX* ±0.5°								
							A0	NEW RELEASE				
SCALE		NONE		REV.		A0		UNIT			mm	
												
						NO. REV.		REVISIONS				
											HZF 07/20/2022	
											CHK DATE	