

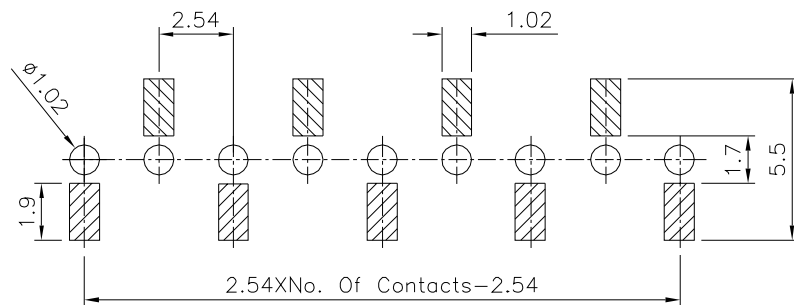
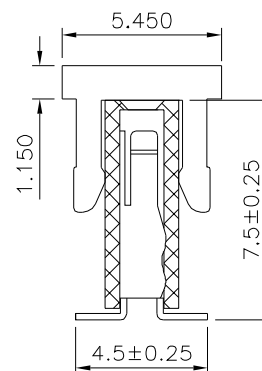


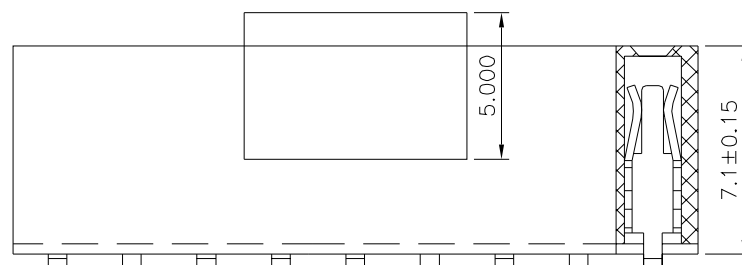

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

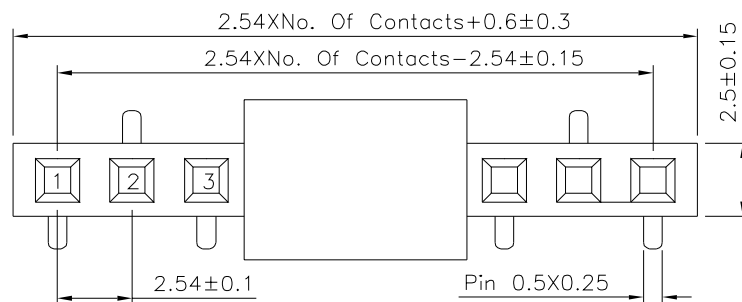

SPECIFICATION

Current Rating:3A
Withstand Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Insulator:PA6T(UL94V-0),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22369

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X.	± 0.25	X.	$\pm 2^{\circ}$
.X	± 0.20	.X	$\pm 1.5^{\circ}$
.XX	± 0.15	.XX	$\pm 1^{\circ}$
.XXX	± 0.10	.XXX	$\pm 0.5^{\circ}$

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

A0

NEW RELEASE

HZF

01/19/2018