
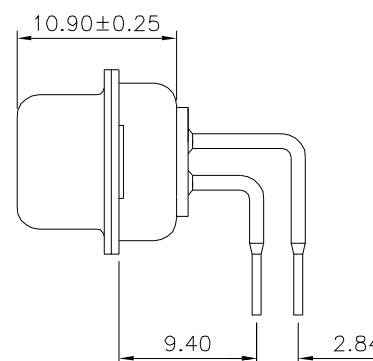
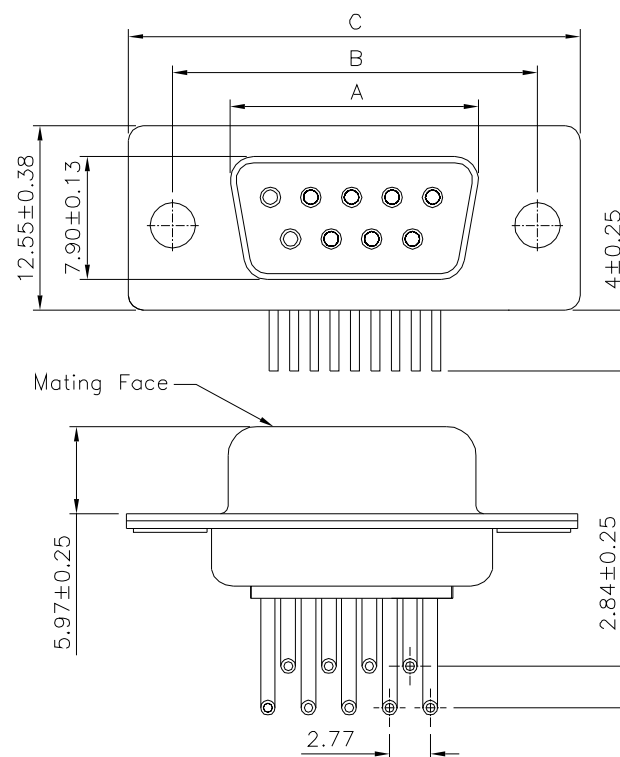


SPECIFICATION

Current Rating:5.0 Amps
 Dielectric Withstanding Voltage:1000V AC Min.
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Insulator:PBT+30%G.F.(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 Shell:Steel,Front Shell Nickel Plated,
 Back Shell Tin Plated
 RoHS Compliant

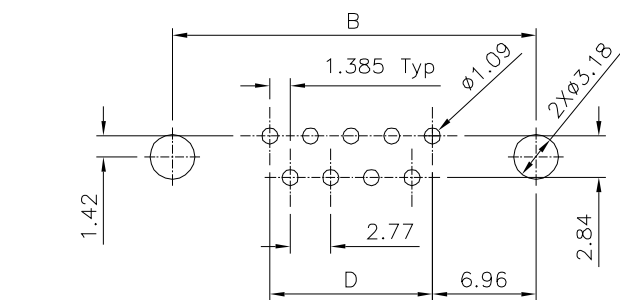

Pos.	A±0.25	B±0.13	C±0.38	D
09	16.33	24.99	30.81	11.08
15	24.66	33.32	39.14	19.39
25	38.38	47.04	53.04	33.24
37	54.84	63.50	69.32	49.86

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22375

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

LZX

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38
 .XX ±0.30
 .XXX ±0.15
 Radius ±0.25
 Hole ±0.13

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

△ A0

NEW RELEASE

HZF

02/17/2022

SCALE NONE

REV.

A0