
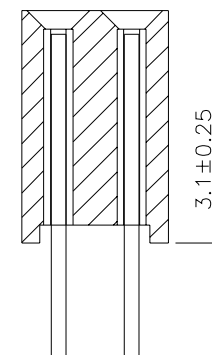
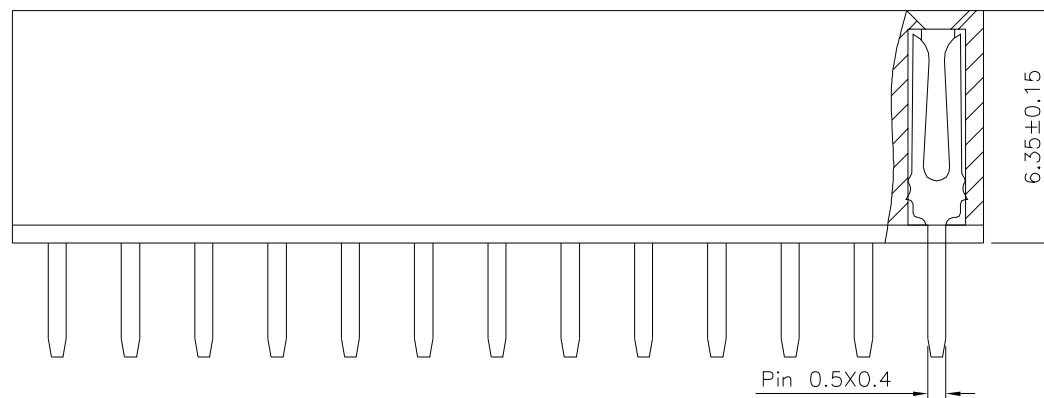


Recommended P.C.B Layout(Top View)
(PCB Board Tolerance ± 0.05)

SPECIFICATION

Current Rating:1.5 Amps
Withstand Voltage:500V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T(UL94V-0),Black
RoHS Compliant

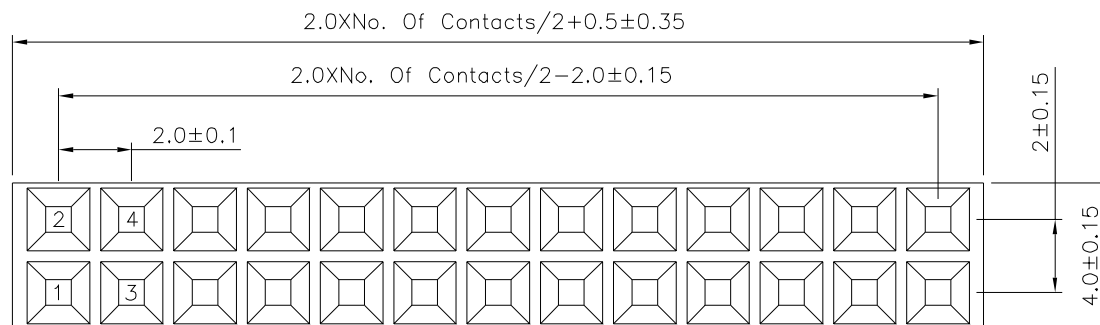

Pin 0.5X0.4

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22381

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LZX

SCALE


NONE

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
<5 ± 0.05 ANG. $\pm 0.03^\circ$
5~25 ± 0.10
25~80 ± 0.15
>80 ± 1.20

UNIT
mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

DATE

02/09/2022