

SPECIFICATION

Current Rating:13A(2~4P),11A(6~10P)

Voltage Rating:600V

Withstanding Voltage:5000V AC/Minute


Ambient Temperature Rise:-55°C~+105°C

⚠ Insulator:PA66(UL94V-2),Nature






⚠ Contact:Phosphor Bronze,Tin Plated Over Nickel

No. Of Contacts:02~10 Contacts

RoHS Compliant

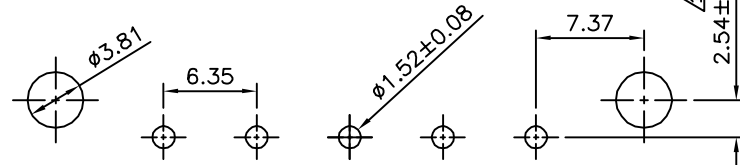

Recommended P.C.B. Layout

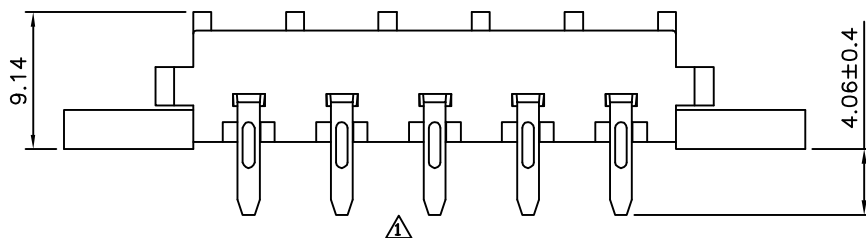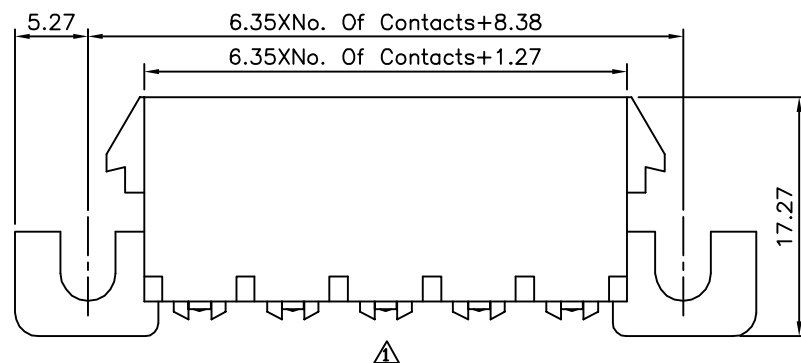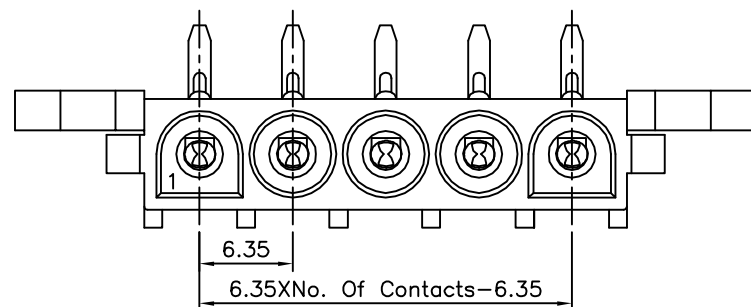

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22384

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A2


UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ± 0.4

.XX ± 0.25

.XXX ± 0.08

UNIT
mm



	A2	Modify Data	HZF	11/12/2013
	A1	Modify Data	HZF	05/16/2013
	A0	NEW RELEASE	HZF	12/10/2007
NO	REV	REVISIONS	CHK	DATE