

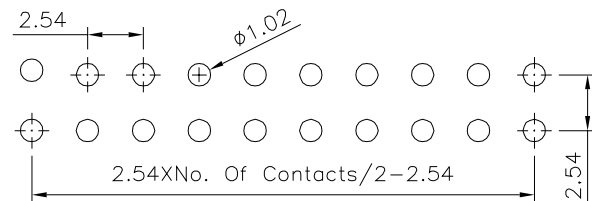
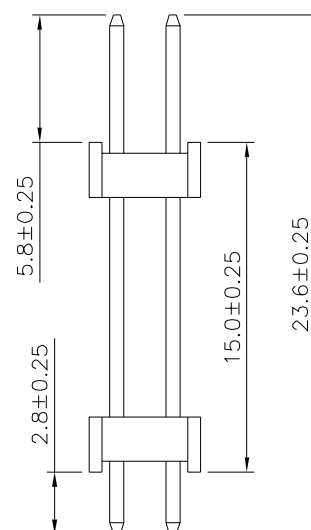


SPECIFICATION

Current Rating:3 Amps
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

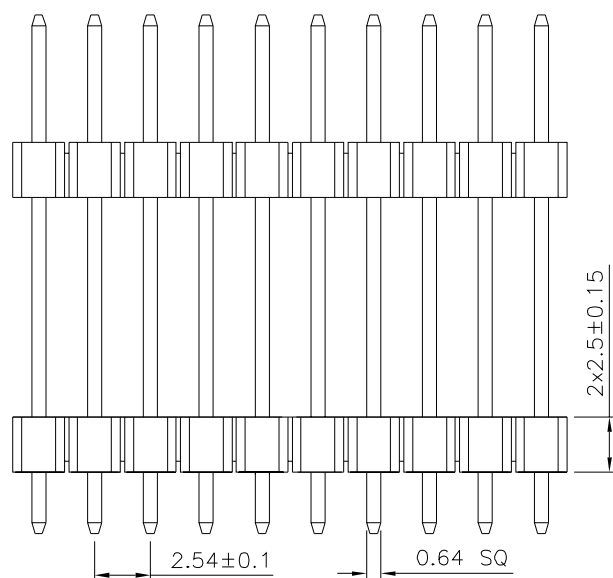

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

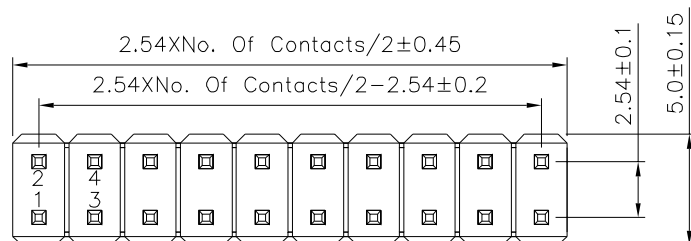

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22402

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LZX

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X: ±0.25 X*: ±2*
.X ±0.20 .X* ±1.5*
.XX ±0.15 .XX* ±1*
.XXX ±0.10 .XXX* ±0.5*

SCALE

NONE

REV.

A0

UNIT

mm



NO. REV.

REVISIONS

CHK

DATE

A0

NEW RELEASE

HZF

09/27/2022