
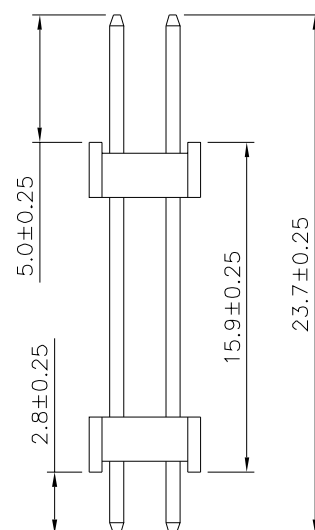
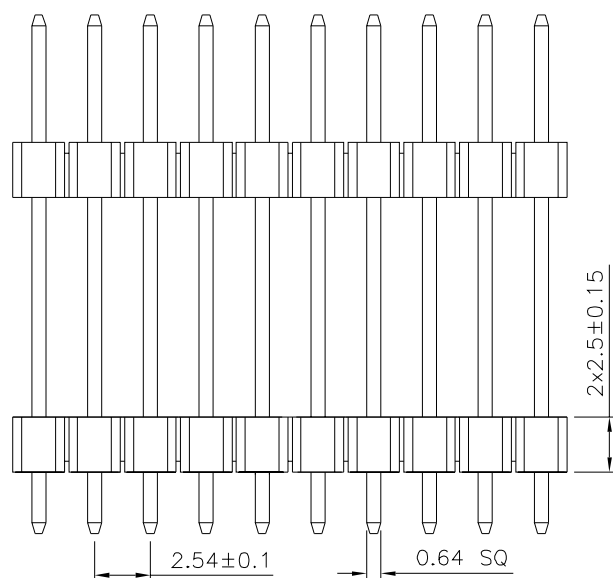


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

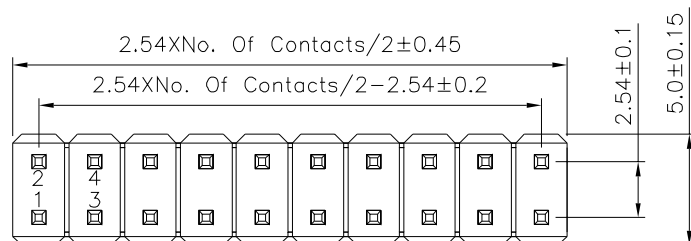

SPECIFICATION

Current Rating:3 Amps
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

22403

SCALE	NONE
-------	------

NONE

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

LZX

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X.	± 0.25	X.*	$\pm 2^{\circ}$
.X	± 0.20	.X*	± 1.5
.XX	± 0.15	.XX*	$\pm 1^{\circ}$
.XXX	± 0.10	.XXX*	± 0.5

	UNIT mm
--	------------



△	AO
NO.	REV.

	NEW RELEASE
7.	REVISIONS

HZF
CHK

09/27/2022
DATE