
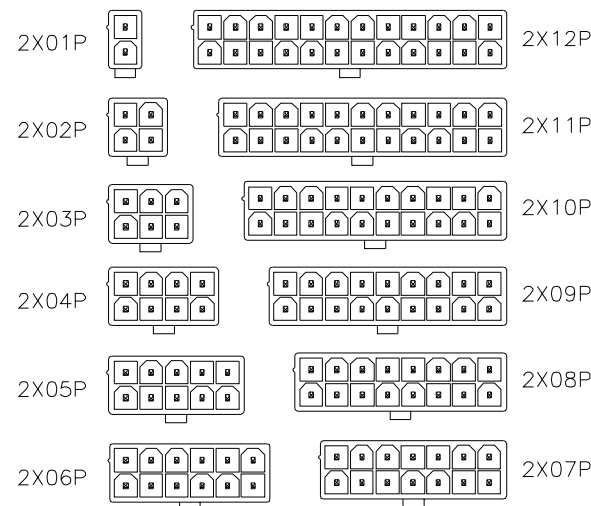
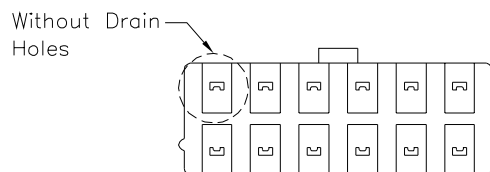
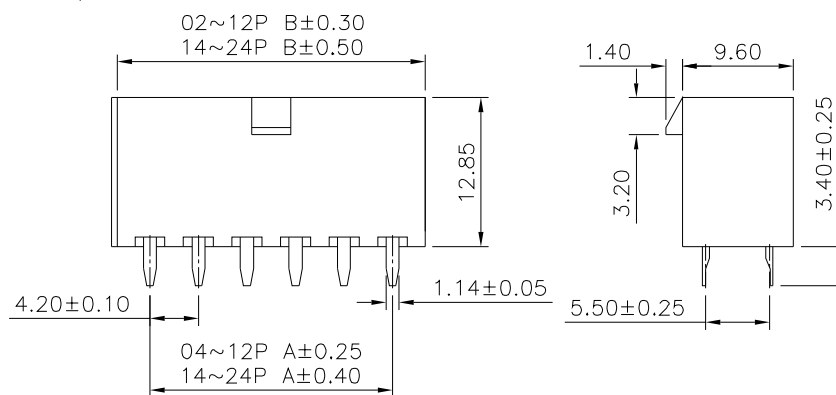


SPECIFICATION

Current Rating:7A AC/DC
Voltage Rating:600V AC/DC
Withstanding Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.
Temperature Range:-25°C~+85°C
Housing:PA66,UL94V-2,Nature
Contact:Brass,Tin Plated Over Nickel
RoHS Compliant

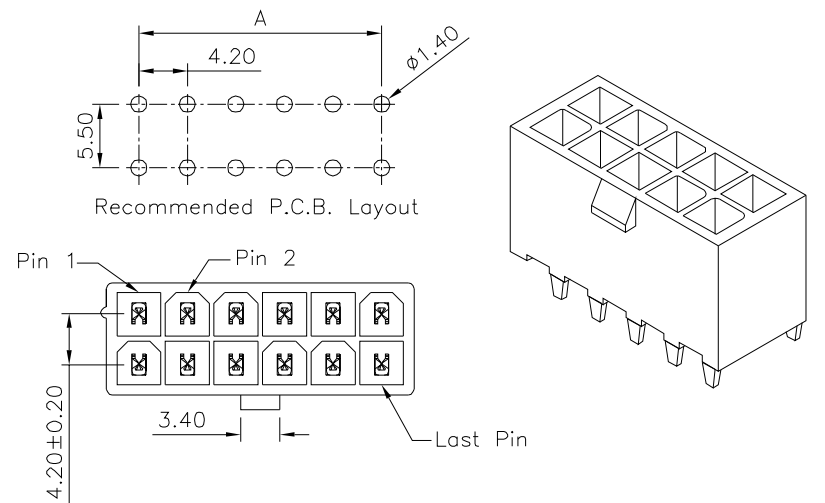

Circuit Size Layout

Pin	A	B
02		5.60
04	4.20	9.80
06	8.40	14.00
08	12.60	18.20
10	16.80	22.40
12	21.00	26.60
14	25.20	30.80
16	29.40	35.00
18	33.60	39.20
20	37.80	43.40
22	42.00	47.60
24	46.20	51.80

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22406

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


LZX

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.30
.X ±0.25
.XX ±0.20
.XXX ±0.05
ANG. ±1°

UNIT
mm



NO. REV.

A0 NEW RELEASE

CHK

03/15/2022

REVISIONS

DATE