
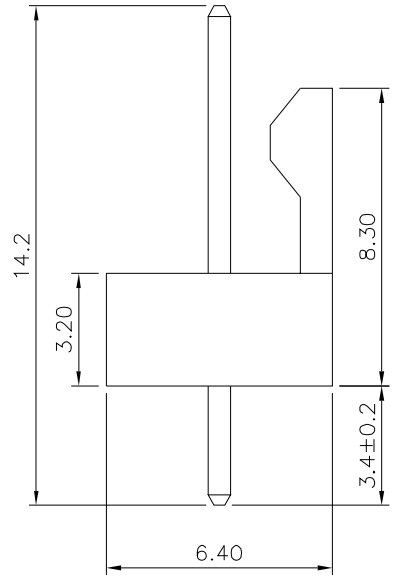


SPECIFICATION
Current Rating:3A AC/DC
Voltage Rating:250V AC/DC
Withstand Voltage:1000V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Insulator:PA66(UL94V-2),Brown
Contact:Brass,Tin Plated
RoHS Compliant

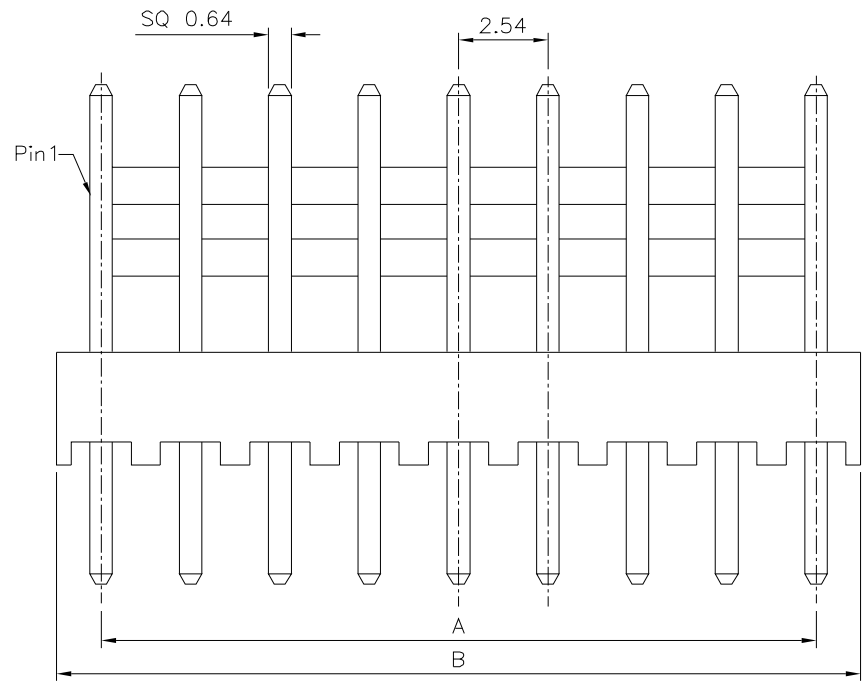

Pin	A	B	Pin	A	B
2	2.54	5.08	12	27.94	30.48
3	5.08	7.62	13	30.48	33.02
4	7.62	10.16	14	33.02	35.56
5	10.16	12.70	15	35.56	38.10
6	12.70	15.24	16	38.10	40.64
7	15.24	17.78	17	40.64	43.18
8	17.78	20.32	18	43.18	45.72
9	20.32	22.86	19	45.72	48.26
10	22.86	25.40	20	48.26	50.80
11	25.40	27.94			

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22442

APPROVED BY
EMILY

CHECKED BY
HZF

DRAWING BY
HAO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

X ±0.50
.XX ±0.25
.XXX ±0.10
ANG. ±2°

UNIT mm

SCALE

NONE

REV.

A1

	A1	Modify Data	HZF	11/07/2014	
	A0	NEW RELEASE	INGRID	04/16/2007	
NO.	REV.	REVISIONS	CHK	DATE	