

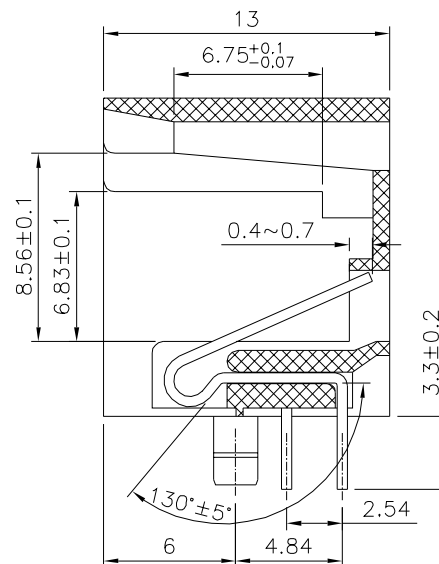


# SPECIFICATION


Voltage Rating:125V AC RMS  
 Current Rating:1.5 Amp  
 Dielectric Strength:1000V AC Or 1500V DC RMS  
 At 0.5mA 50Hz/60Hz For 1 Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min. At 500V DC  
 Operation Temperature:-40°C~+85°C  
 Housing:LCP(UL94V-0),Black  
 Contact:Phosphor Bronze, $\phi=0.46\text{mm}$   
 Gold Flash Over All,Over Nickel  
 Mates With Modular Plug Conforming To  
 FCC Part 68,Subpart F.  
 RoHS Compliant

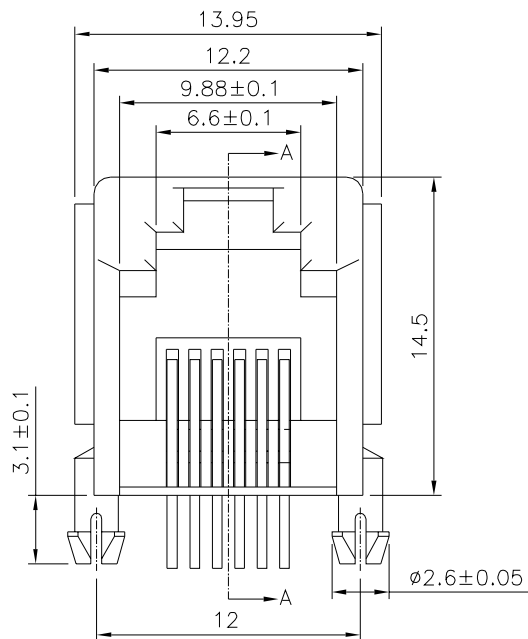

Section A-A

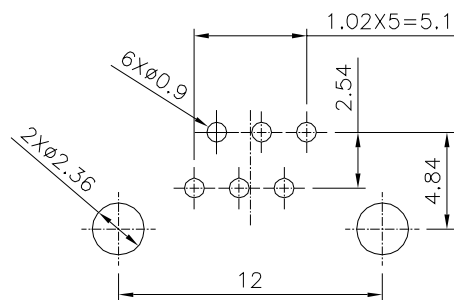

Recommended P.C.B. Layout  
 (PCB Board Tolerance $\pm 0.05$ )

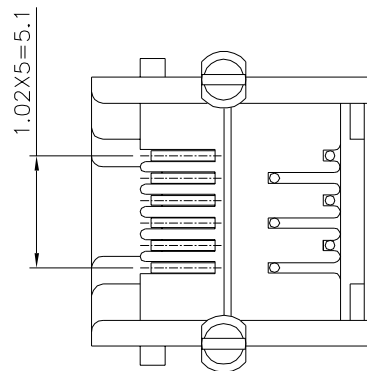

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

22457

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LZX

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE  
 0~15  $\pm 0.15$   
 15~30  $\pm 0.20$   
 30~50  $\pm 0.25$   
 50~  $\pm 0.30$   
 ANG.  $\pm 1^\circ$


SCALE

NONE

REV.

A0

UNIT  
 mm



NO.

REV.

NEW RELEASE

REVISIONS

HZF

CHK

07/11/2022

DATE