


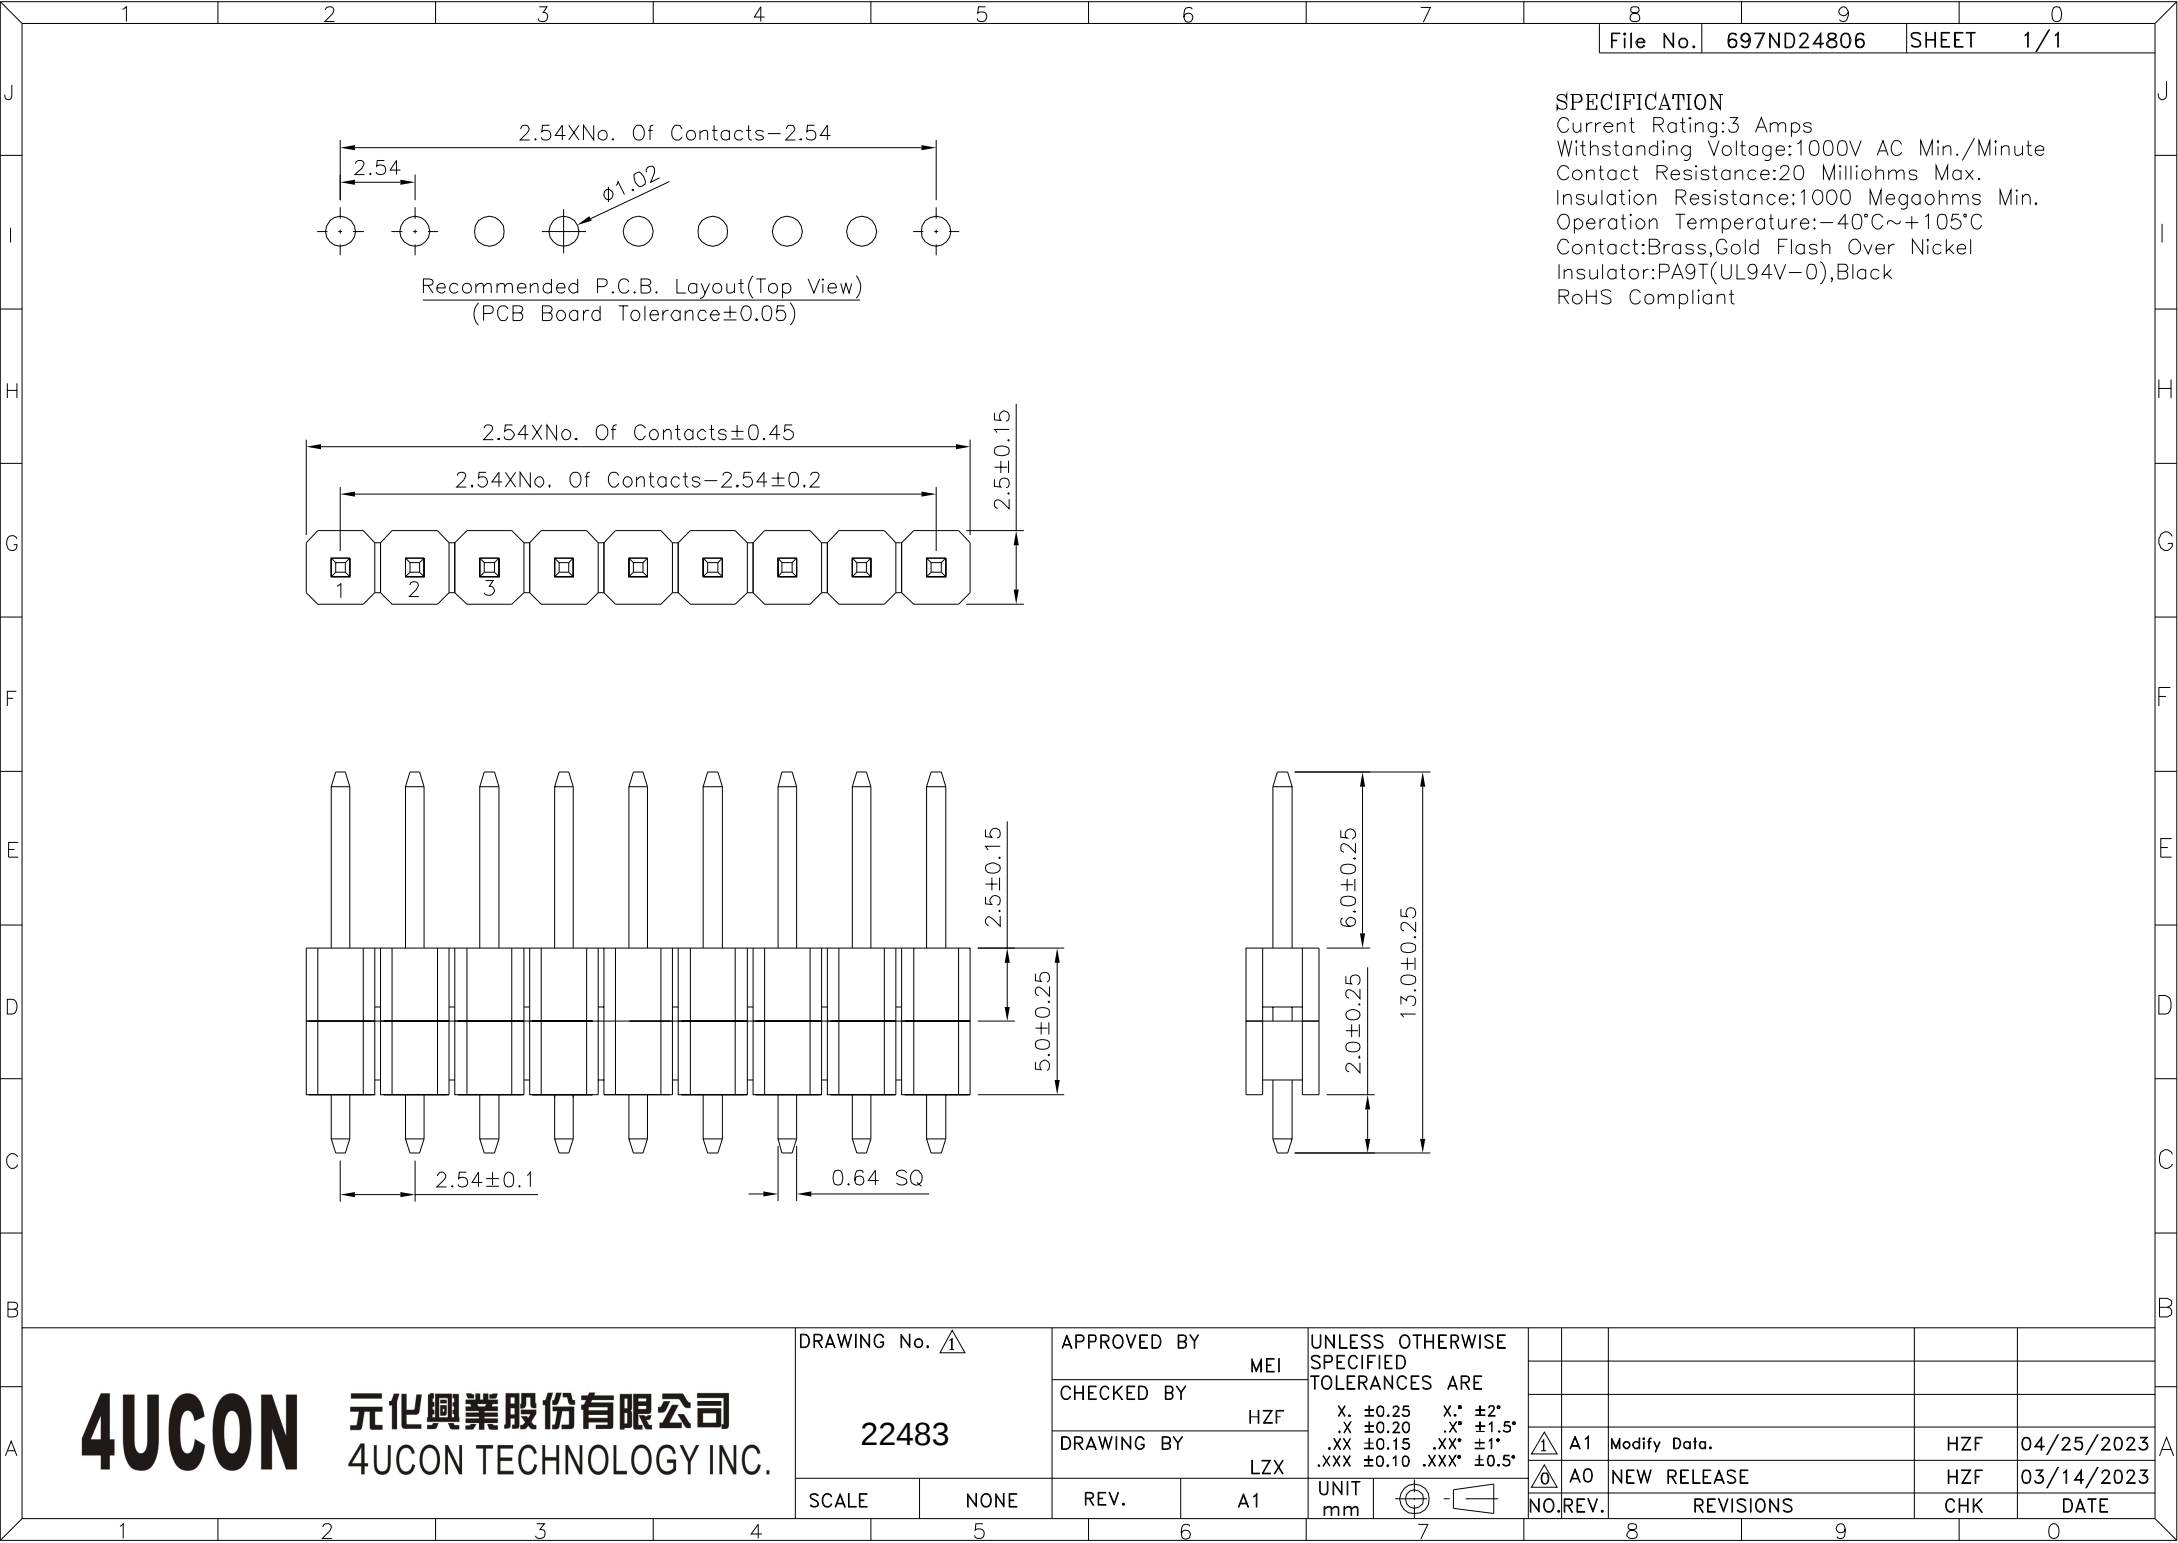

SPECIFICATION
Current Rating:3 Amps
Withstanding Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA9T(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 22483


APPROVED BY MEI
CHECKED BY HZF
DRAWING BY LZX

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.25 X.* ±2°
.X ±0.20 .X* ±1.5°
.XX ±0.15 .XX* ±1°
.XXX ±0.10 .XXX* ±0.5°

SCALE NONE

REV. A1

UNIT mm



NO.

REV.

CHK

DATE