

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

SPECIFICATION

Current Rating:3 Amps

Withstand Voltage:1000V AC Min./Minute

Contact Resistance:20 Milliohms Max.




Insulation Resistance:1000 Megaohms Min.

Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact:Brass,Gold Flash Over Nickel

Insulator:PA9T(UL94V-0),Black

RoHS Compliant

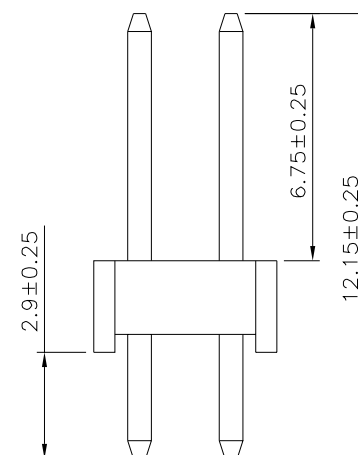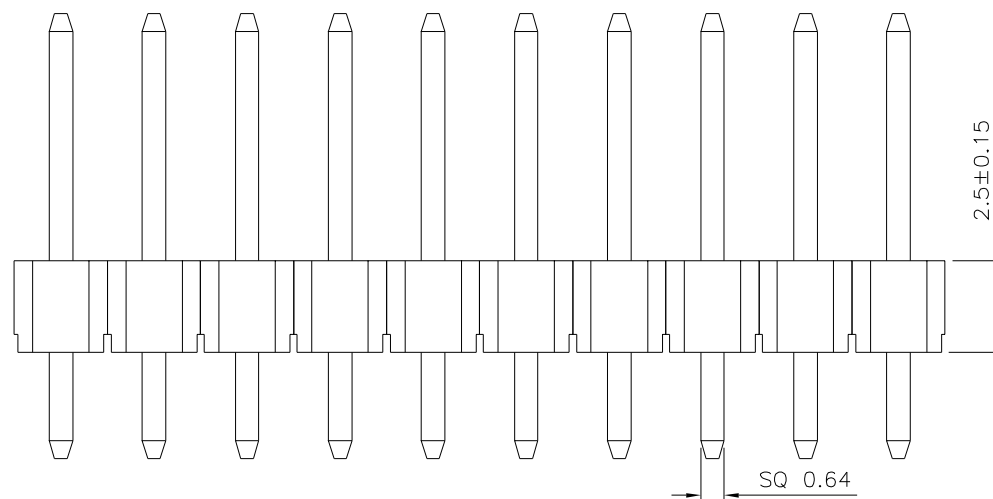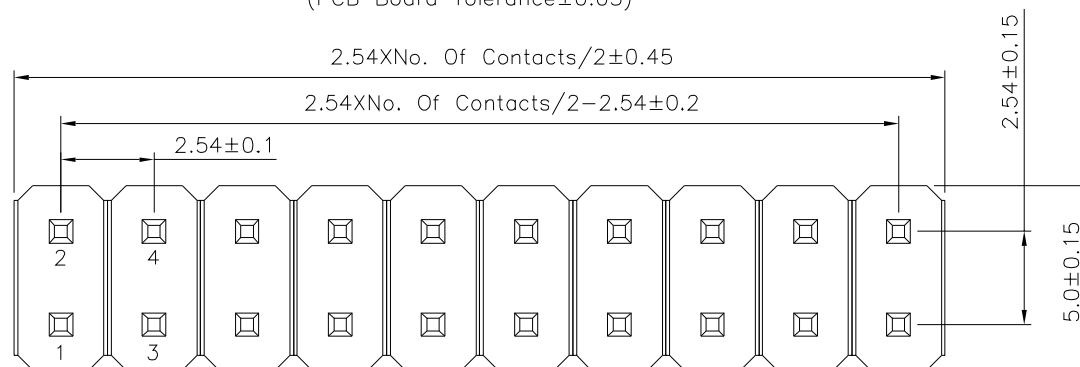

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

22486

SCALE	NONE
-------	------

NONE

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

LZX

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ± 0.30	X.* $\pm 2^\circ$
.X ± 0.25	.X* $\pm 1.5^\circ$
.XX ± 0.20	.XX* $\pm 1.0^\circ$
.XXX ± 0.15	.XXX* $\pm 0.5^\circ$

	UNIT mm
--	------------



0	A0
NO.REV.	

NEW RELEASE

REVISIONS

HZF

04/24/2023	
------------	--

CHK

DATE