


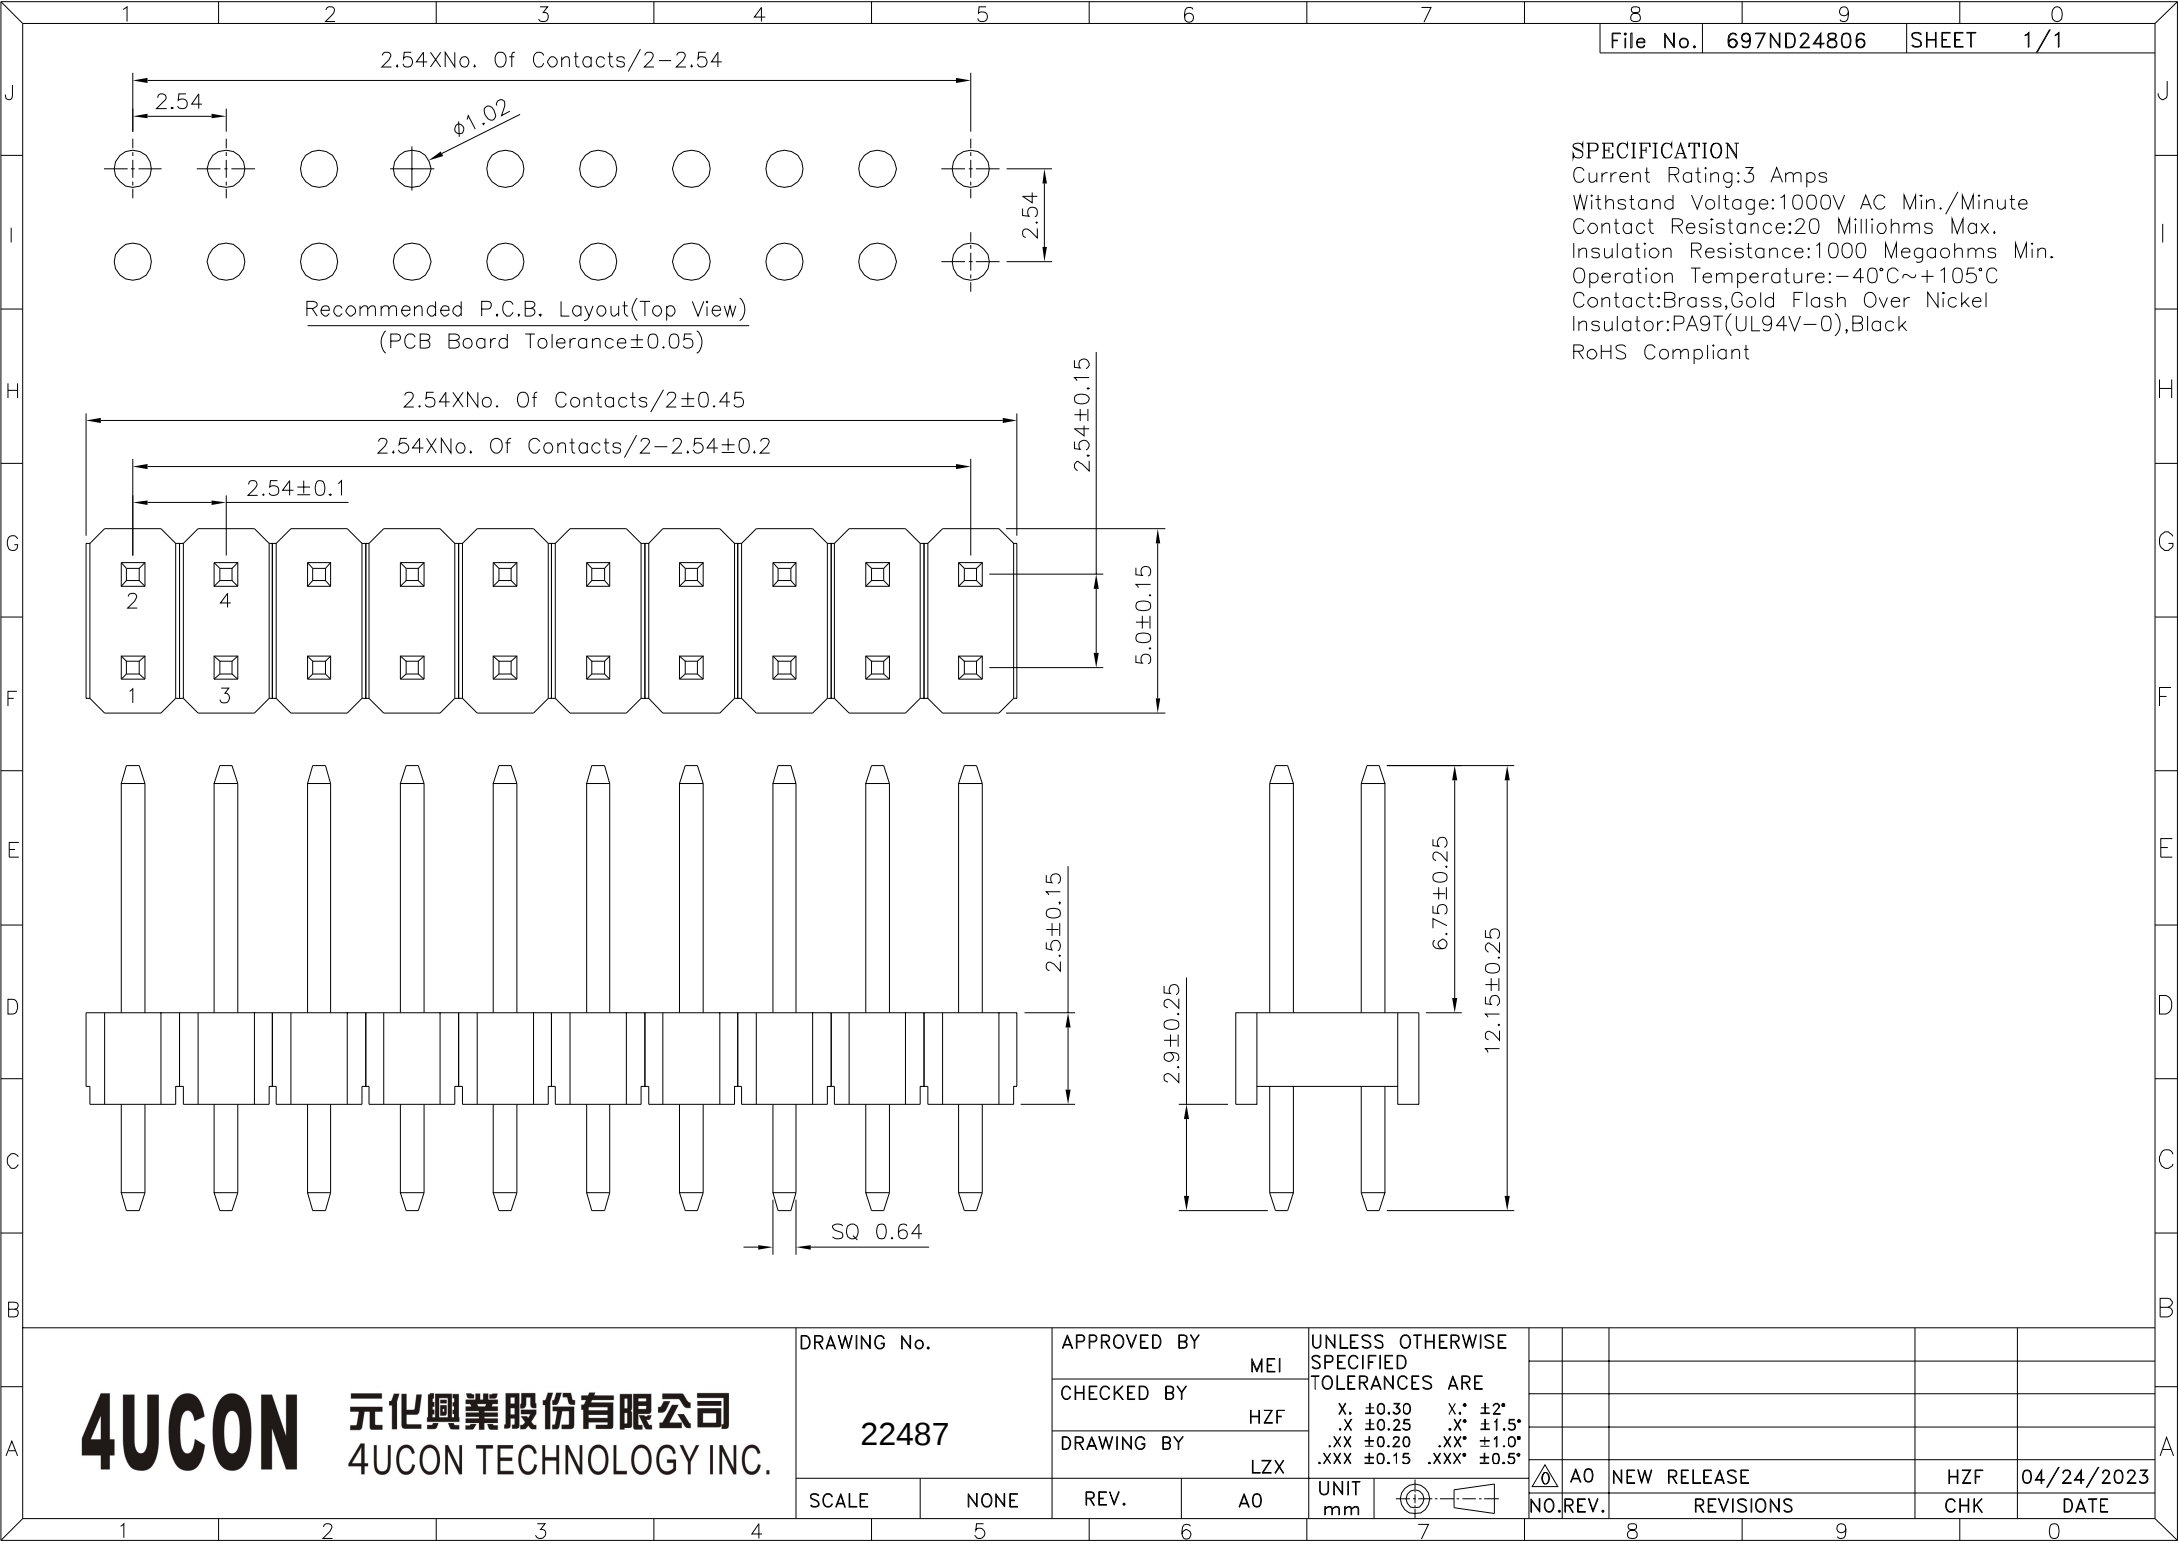

SPECIFICATION
Current Rating:3 Amps
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA9T(UL94V-0),Black
RoHS Compliant

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No. 22487		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 X.* ±2* .X ±0.25 .X* ±1.5* .XX ±0.20 .XX* ±1.0* .XXX ±0.15 .XXX* ±0.5*						
		CHECKED BY HZF								
		DRAWING BY LZX								
		UNIT mm					A0	NEW RELEASE		HZF
SCALE	NONE	REV.	A0			NO. REV.	REVISIONS		CHK	DATE