
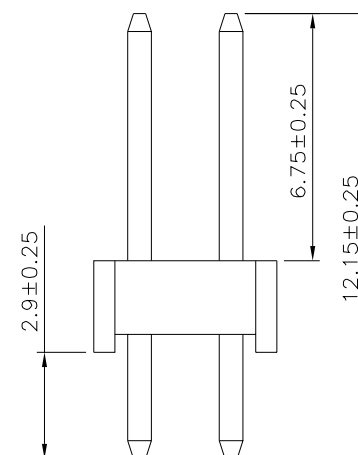
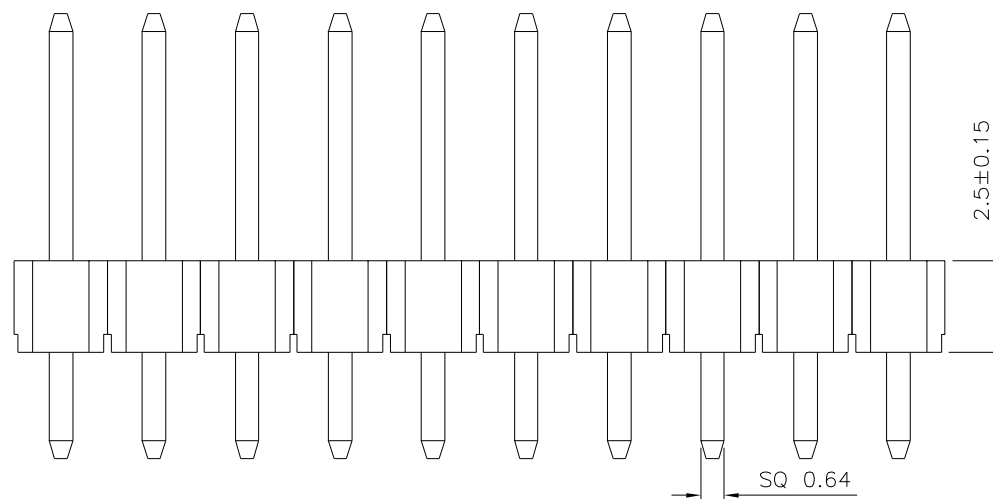


Recommended P.C.B. Layout(Top View)  
(PCB Board Tolerance $\pm 0.05$ )

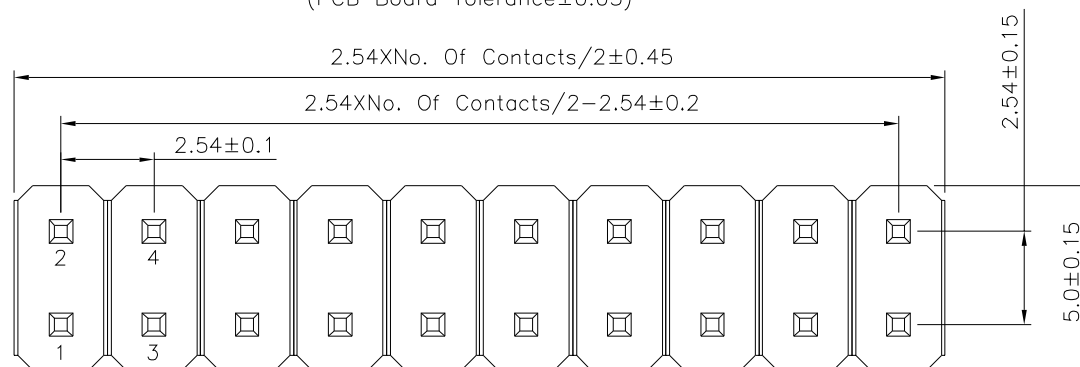

SPECIFICATION

Current Rating:3 Amps

Withstand Voltage:1000V AC Min./Minute

Contact Resistance:20 Milliohms Max.

Insulation Resistance:1000 Megaohms Min.

Operation Temperature:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact:Brass,Gold Flash Over Nickel

Insulator:PA9T(UL94V-0),Black

RoHS Compliant

**4U CON** 元化興業股份有限公司  
4U CON TECHNOLOGY INC.

|             |
|-------------|
| DRAWING No. |
|-------------|

22488

|       |      |
|-------|------|
| SCALE | NONE |
|-------|------|

NONE

|             |
|-------------|
| APPROVED BY |
|-------------|

MEI

|            |
|------------|
| CHECKED BY |
|------------|

HZF


DRAWING BY

LZX

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

|                 |                         |
|-----------------|-------------------------|
| X. $\pm 0.30$   | X.* $\pm 2^{\circ}$     |
| .X $\pm 0.25$   | .X* $\pm 1.5^{\circ}$   |
| .XX $\pm 0.20$  | .XX* $\pm 1.0^{\circ}$  |
| .XXX $\pm 0.15$ | .XXX* $\pm 0.5^{\circ}$ |

|  |      |
|--|------|
|  | UNIT |
|  | mm   |



|         |    |
|---------|----|
| 0       | A0 |
| NO.REV. |    |

NEW RELEASE

## REVISIONS

---

HZF

|            |
|------------|
| 04/24/2023 |
|------------|

CHK

DATE