

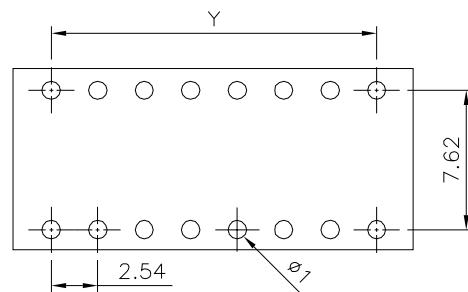


△ SPECIFICATION


Non-Switching Rating:100mA,50V DC
 Switching Rating:25mA,24V DC
 Withstand Voltage:500V AC/Minute
 Insulation Resistance:100 Megaohms Min.
 At 500V DC
 Contact Resistance:50 Milliohms Max.(Initial)
 Operation Temperature:-20°C~+70°C
 Base:PBT(UL94V-0),Black
 Actuator:PBT(UL94V-0),White
 Cover:PBT(UL94V-0),Blue
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant

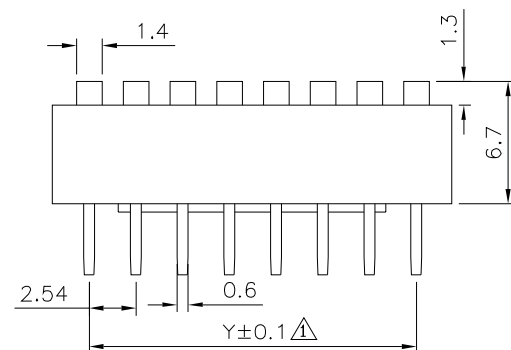


Recommended P.C.B. Layout

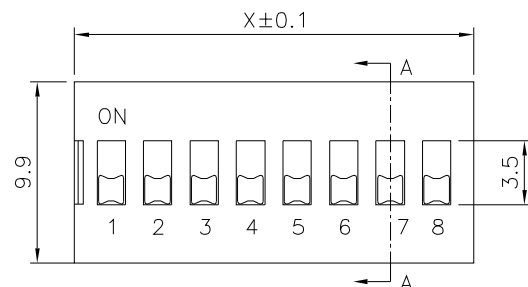



03~12P

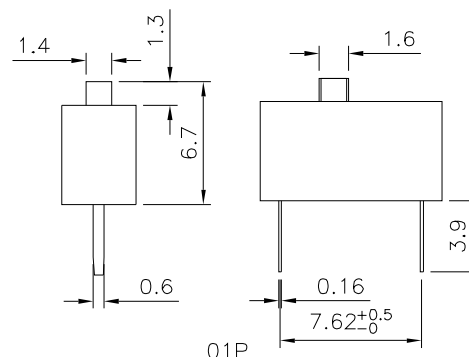


01P

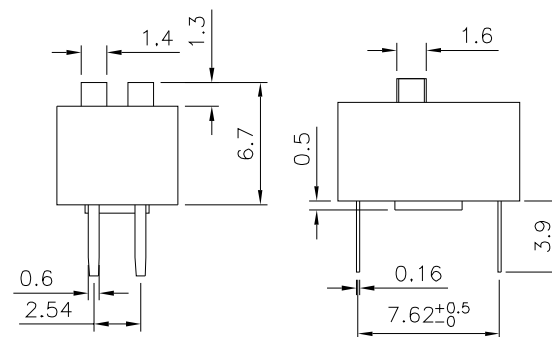

02P



Section A-A



Pin	X	Y
01	4.06	—
02	6.6	2.54
03	9.14	5.08
04	11.68	7.62
05	14.22	10.16
06	16.76	12.7
07	19.3	15.24
08	21.84	17.78
09	24.38	20.32
10	26.92	22.86
12	32	27.94

4UCON

元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22497

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ±0.50 X.* ±5°
 .X ±0.30 .X.* ±3°
 .XX ±0.20 .XX.* ±2°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△	A1	Modify Data	HZF	01/17/2022
△	A0	NEW RELEASE	HZF	08/26/2017