

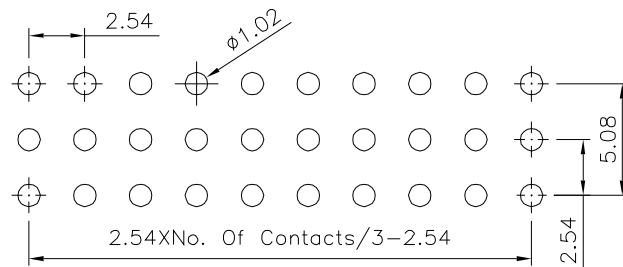
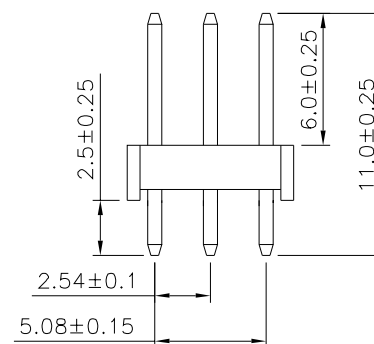


SPECIFICATION

Current Rating:3 Amps
 Withstand Voltage:1000V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Insulator:PA9T(UL94V-0),Black
 RoHS Compliant

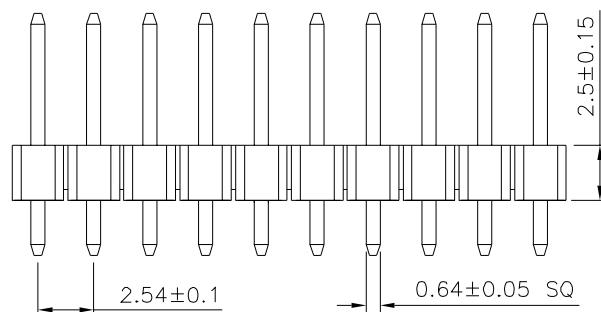

Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance ± 0.05)

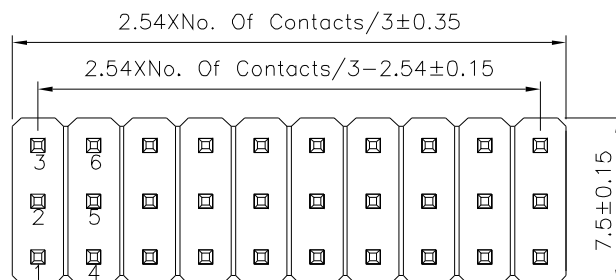

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22511

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LZX


REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ± 0.30 X. $\pm 2^\circ$
 .X ± 0.25 .X $\pm 1.5^\circ$
 .XX ± 0.20 .XX $\pm 1.0^\circ$
 .XXX ± 0.15 .XXX $\pm 0.5^\circ$

UNIT
mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

03/21/2023

DATE