


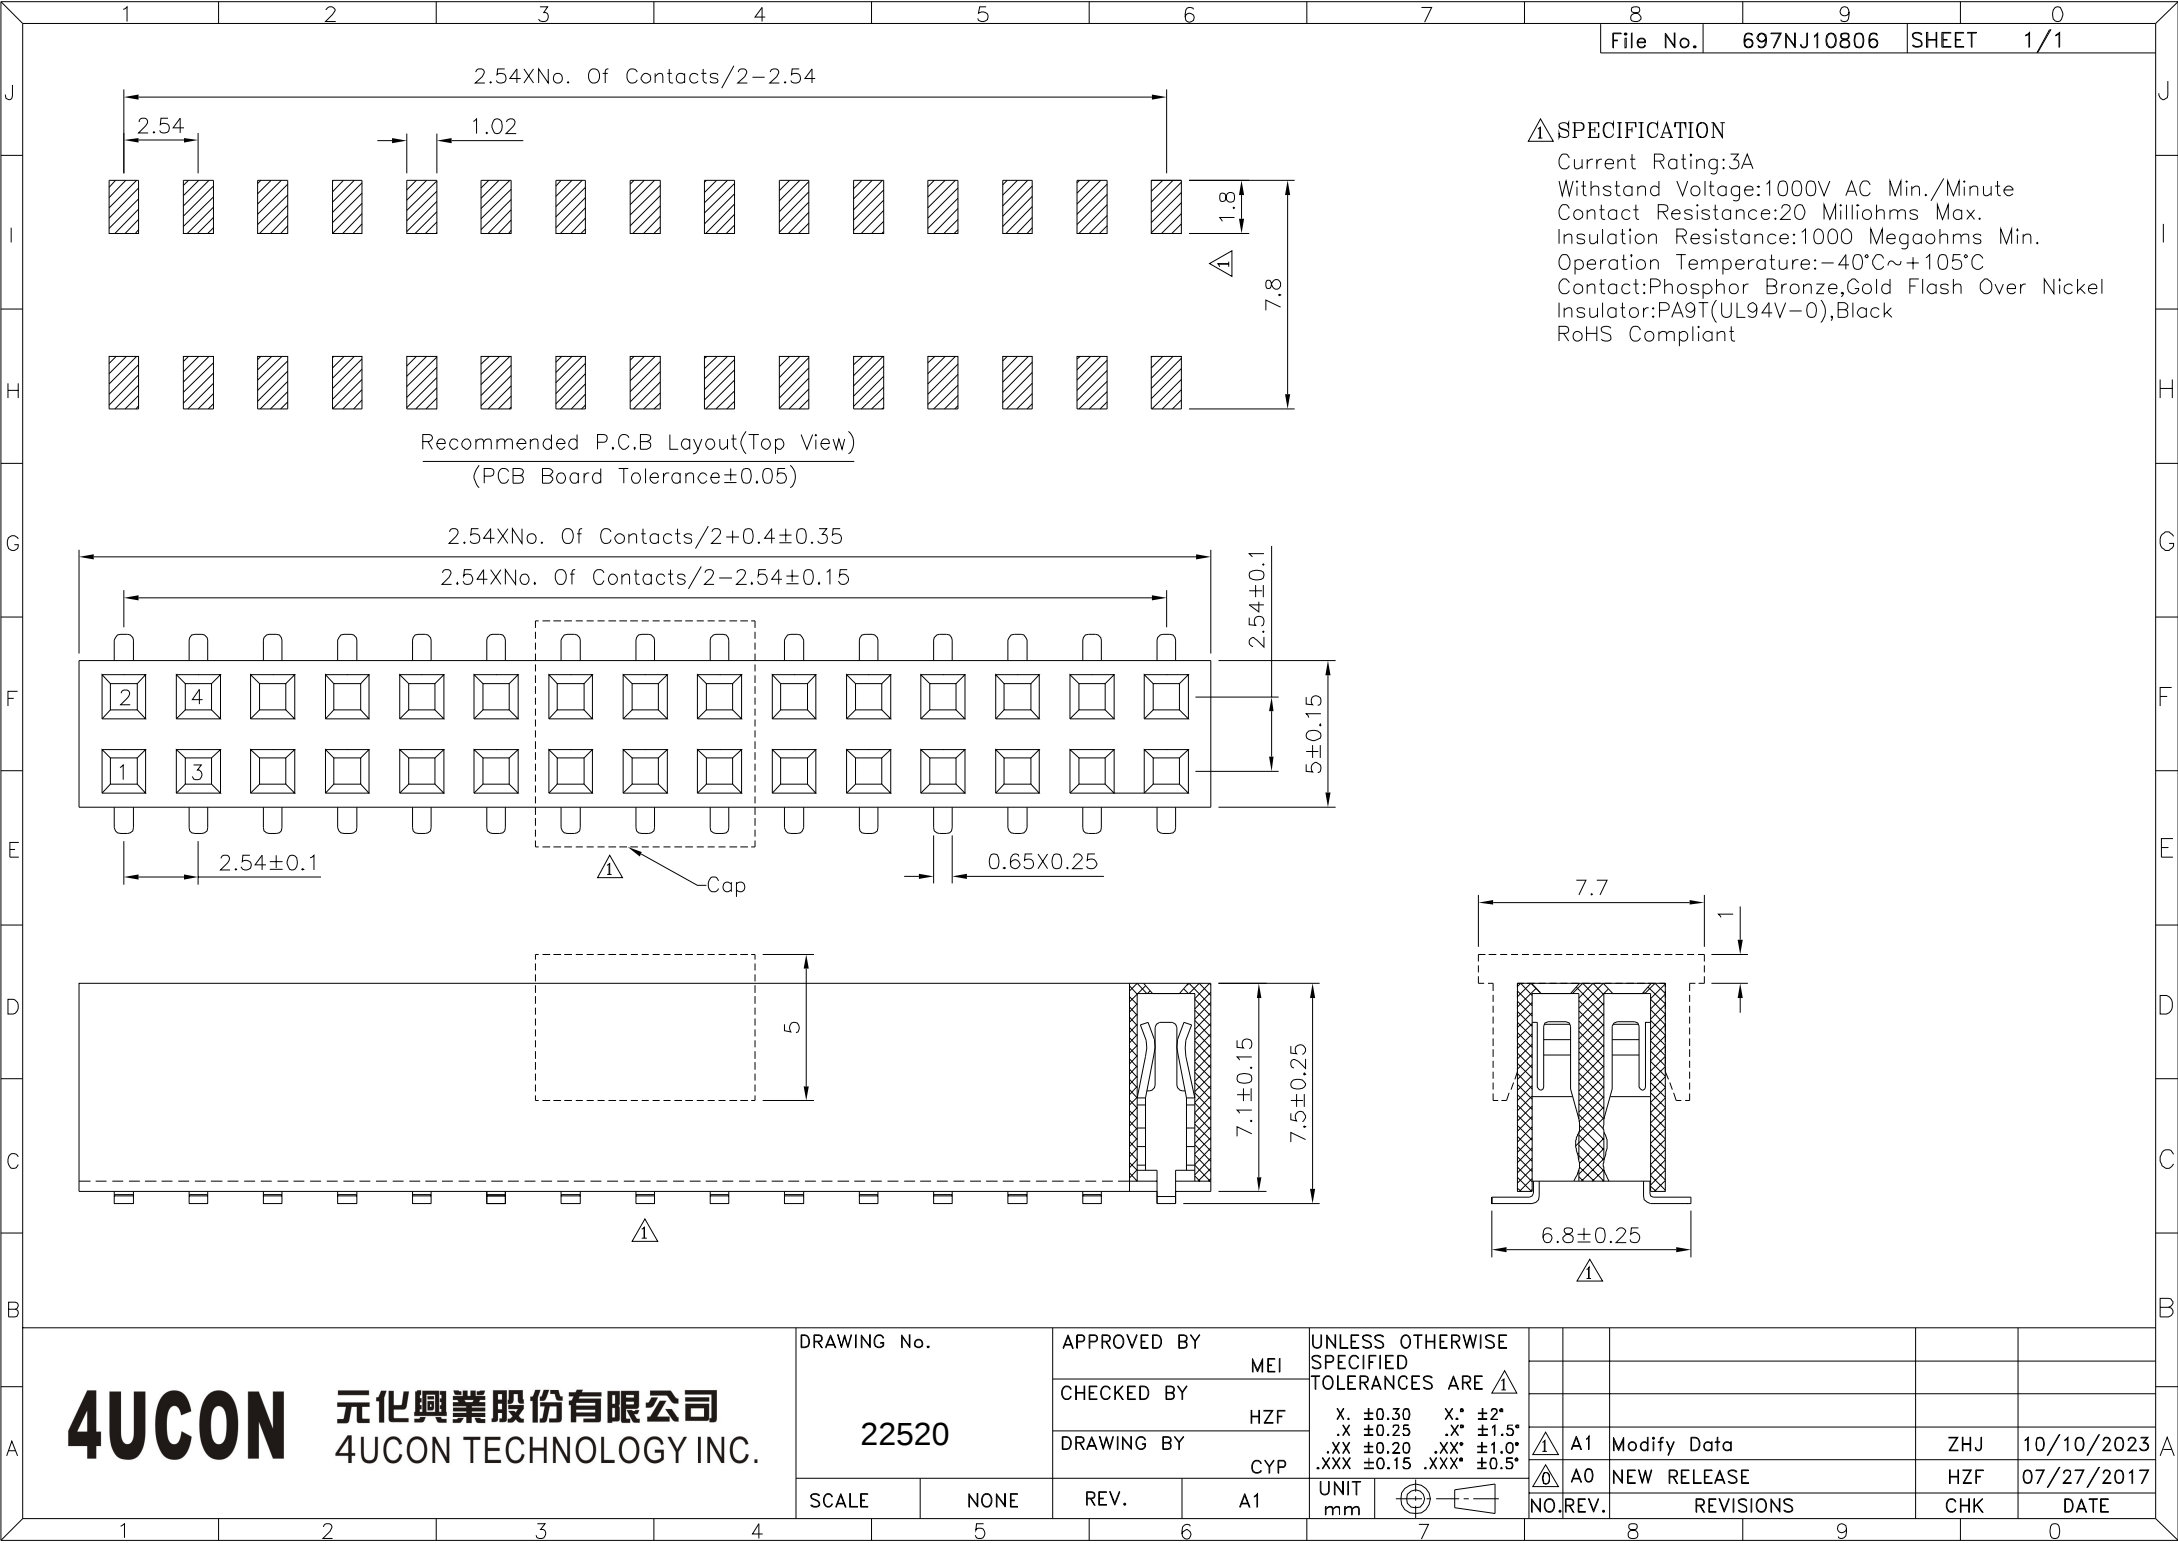

△ SPECIFICATION

Current Rating:3A
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA9T(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	HZF
22520		DRAWING BY	CYP
		SCALE	NONE
REV.		A1	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △		X. ±0.30	X.* ±2"
		.X ±0.25	.X* ±1.5"
		.XX ±0.20	.XX* ±1.0"
		.XXX ±0.15	.XXX* ±0.5"

UNIT		mm	
NO. REV.		REVISIONS	
A1		Modify Data	
A0		NEW RELEASE	
CHK		DATE	