
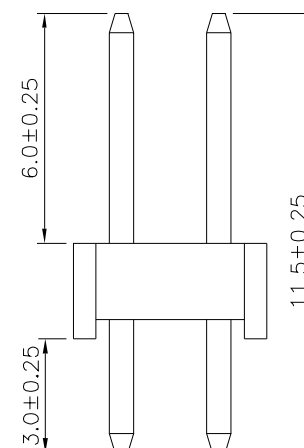
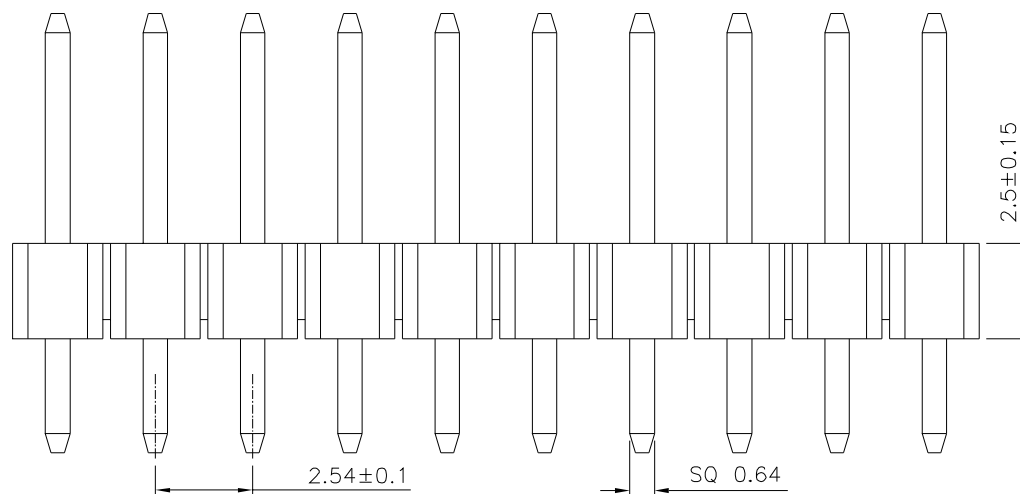


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

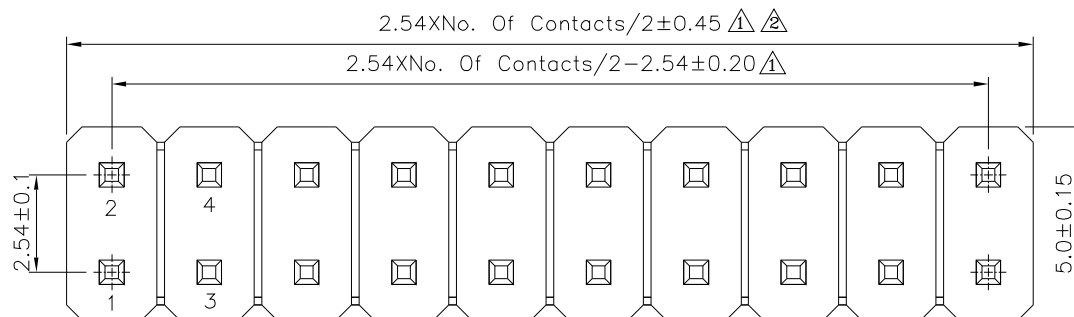

SPECIFICATION

Current Rating:3 Amps
 ▲ Withstanding Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 ▲ Housing:PA9T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22542

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

CYF

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X.	±0.25	X.*	±2°
.X	±0.20	.X*	±1.5°
.XX	±0.15	.XX*	±1°
.XXX	±0.10	.XXX*	±0.5°

	UNIT
	mm



$\triangle$	A Z

$\triangle 3$	AS
$\triangle$	$\triangle$

1	A1
---	----

0	AO
NO	REV

 $M = 1.6 \times 10^6$

Modality

Modify

NEW RE	

Date: _____

Data

Data

REVISIONS

1175

Hzf
Hzf

HZF

НЗГ
СНГ

06 / 30 / 2023

06/29/2023	

11/03/2016

05/18/2013	DATE
------------	------