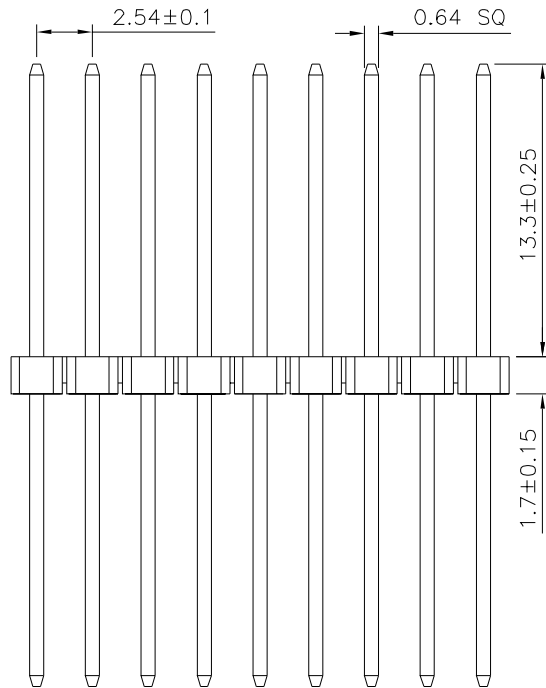
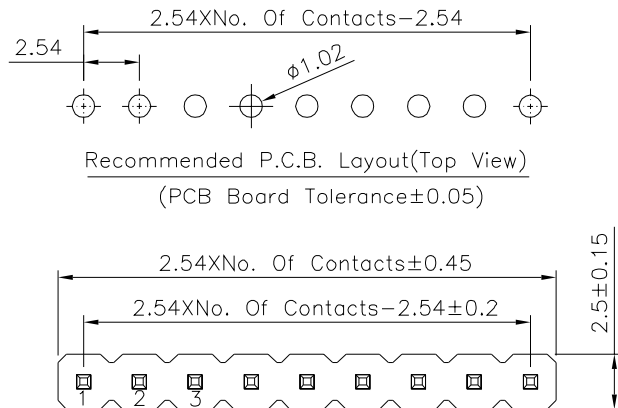


SPECIFICATION

Current Rating:3A

Withstand Voltage:1000V AC Min./Minute

Contact Resistance:20 Milliohms Max.

Insulation Resistance:1000 Megaohms Min.

Operation Temperature:-40°C~+105°C

Contact:Brass,Gold Flash Over Nickel

Insulator:PA9T(UL94V-0),Black

RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22606

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LZX

SCALE

NONE


REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ± 0.25 X. $\pm 2^{\circ}$
.X ± 0.20 .X $\pm 1.5^{\circ}$
.XX ± 0.15 .XX $\pm 1^{\circ}$
.XXX ± 0.10 .XXX $\pm 0.5^{\circ}$

UNIT
mm



NO.

REV.

A0

NEW RELEASE

REVISIONS

HZF

12/07/2023

CHK

DATE