
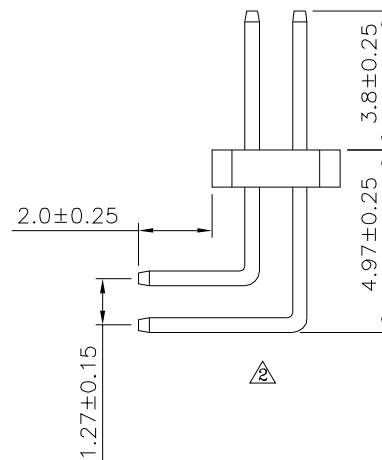
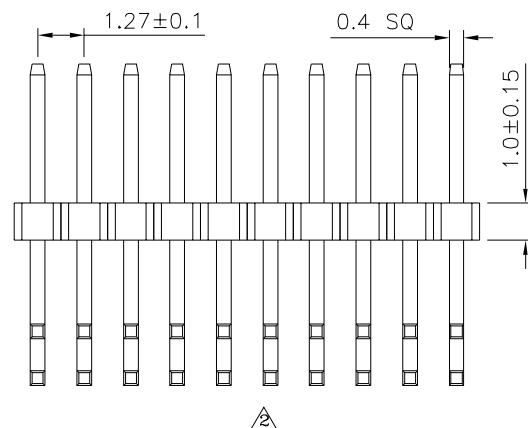
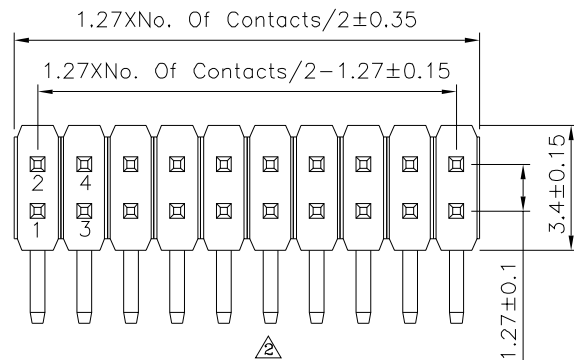


△ SPECIFICATION

Current Rating:1.0A
Withstanding Voltage:500V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA9T(UL94V-0),Black
RoHS Compliant

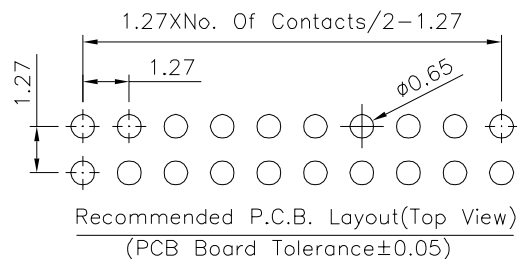

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △ 1

22631

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE △

X. ±0.30 X. ±2°
.X ±0.25 .X ±1.5°
.XX ±0.20 .XX ±1.0°
.XXX ±0.15 .XXX ±0.5°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△ 2	A2	Modify Data	HZF	02/23/2024
△ 1	A1	Modify Data	HZF	09/09/2022
△ 0	A0	NEW RELEASE	HZF	03/11/2019