
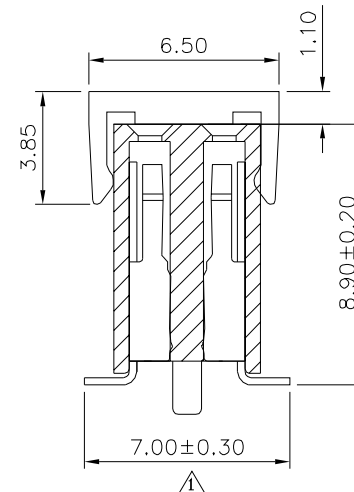
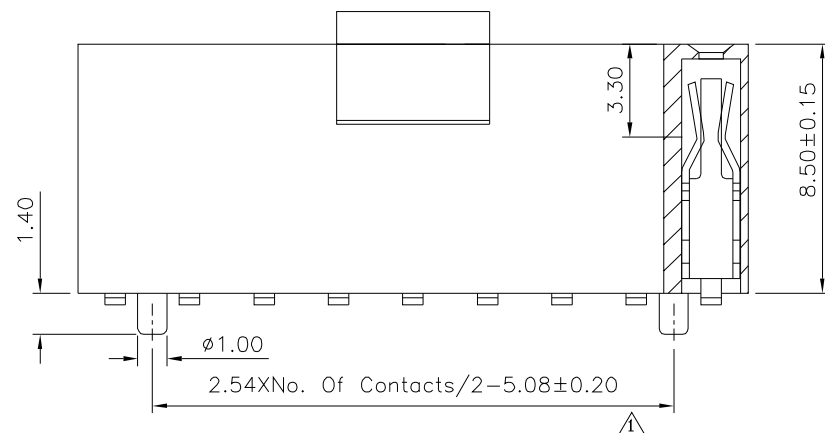
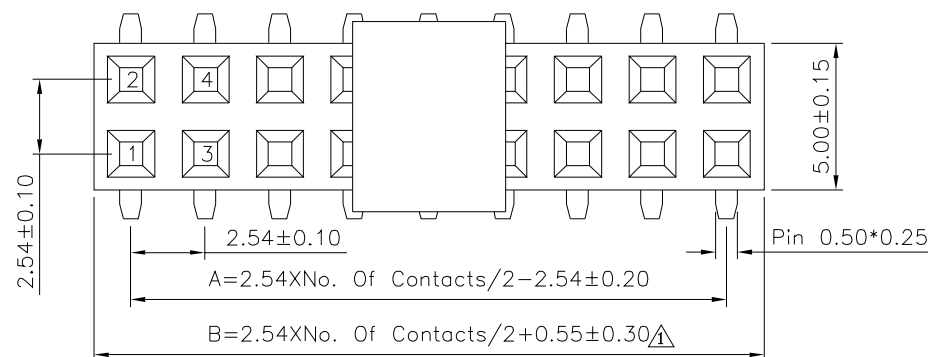


SPECIFICATION

Current Rating:3 Amp
 ΔWithstand Voltage:1000V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Insulator:PA6T+30%G.F.(UL94V-0),Black
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant

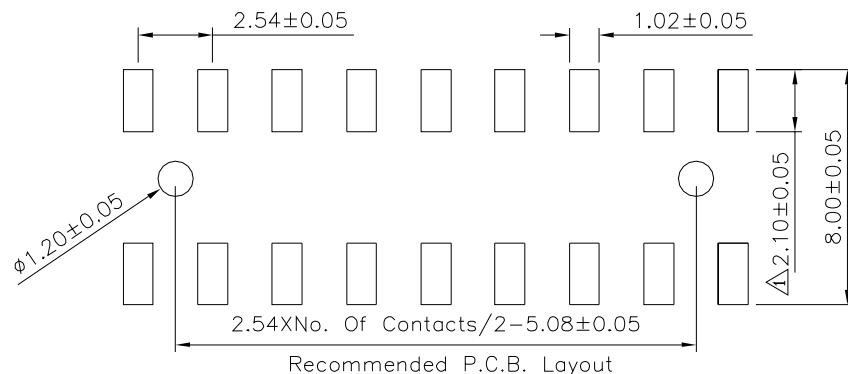

Δ	Pin	A	B	Pin	A	B
	04	2.54	5.63	44	53.34	56.43
	06	5.08	8.17	46	55.88	58.97
	08	7.62	10.71	48	58.42	61.51
	10	10.16	13.25	50	60.96	64.05
	12	12.70	15.79	52	63.50	66.59
	14	15.24	18.33	54	66.04	69.13
	16	17.78	20.87	56	68.58	71.67
	18	20.32	23.41	58	71.12	74.21
	20	22.86	25.95	60	73.66	76.75
	22	25.40	28.49	62	76.20	79.29
	24	27.94	31.03	64	78.74	81.83
	26	30.48	33.57	66	81.28	84.37
	28	33.02	36.11	68	83.82	86.91
	30	35.56	38.65	70	86.36	89.45
	32	38.10	41.19	72	88.90	91.99
	34	40.64	43.73	74	91.44	94.53
	36	43.18	46.27	76	93.98	97.07
	38	45.72	48.81	78	96.52	99.61
	40	48.26	51.35	80	99.06	102.15
	42	50.80	53.89			

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22639

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO


REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 ANG.

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
Δ	A1	Modify Data	HZF	11/08/2022
Δ	A0	NEW RELEASE	HZF	07/09/2016