File No.	6970D18806	SHEET	1/1

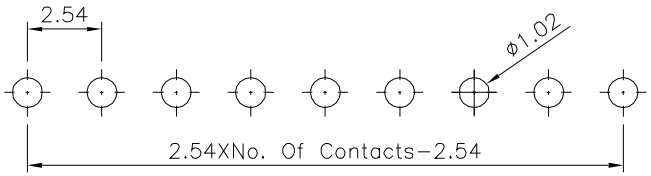

Recommended P.C.B. Layout
Tolerance:±0.05(Top View)

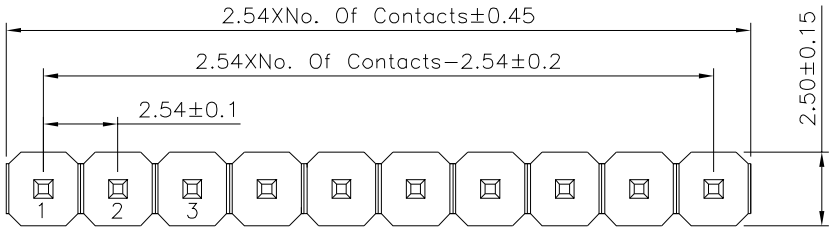

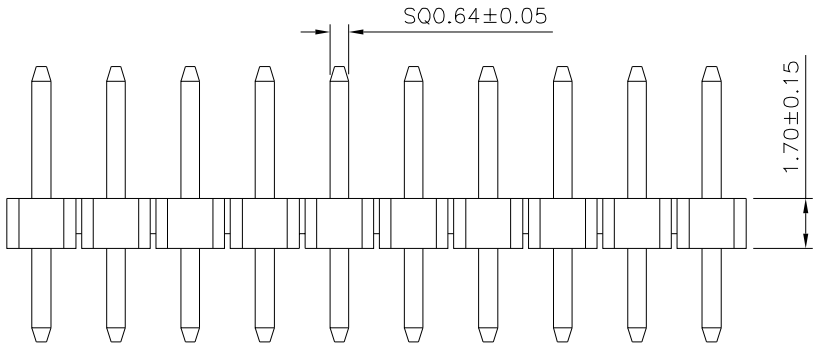



SPECIFICATION
Current Rating:3A
Withstand Voltage:AC 1000V Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Contact:Brass,Gold Plated 10u"Over All,Over Nickel
Insulator:PA9T(UL94V−0),Black
RoHS Compliant

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
22659	CHECKED BY HZF	X. ±0.25 X.° ±2° X. ±0.20 .X° ±1.5° .XX ±0.15 .XX° ±1° .XXX ±0.10 .XXX° ±0.5°
	DRAWING BY LSM	
SCALE NONE	REV. A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
0	A0	NEW RELEASE	HZF	04/18/2024