
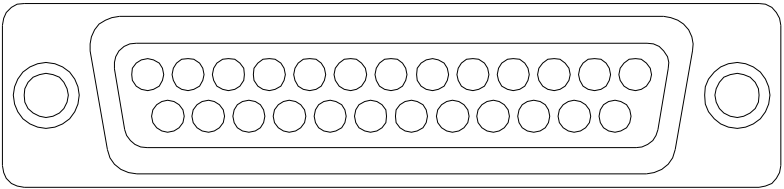

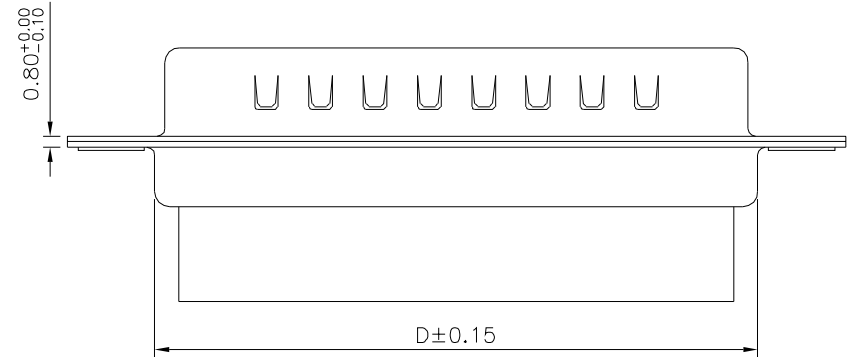


SPECIFICATION

Withstanding Voltage:500V(One Minute)  
Insulation Resistance:1000 Megaohms Min.  
Operation Temperature:-55°C~+105°C  
Insulator:PA66(UL94V-0),Black  
Shell:Steel,Front:Nickel Plated,Rear:Tin Plated  
RoHS Compliant

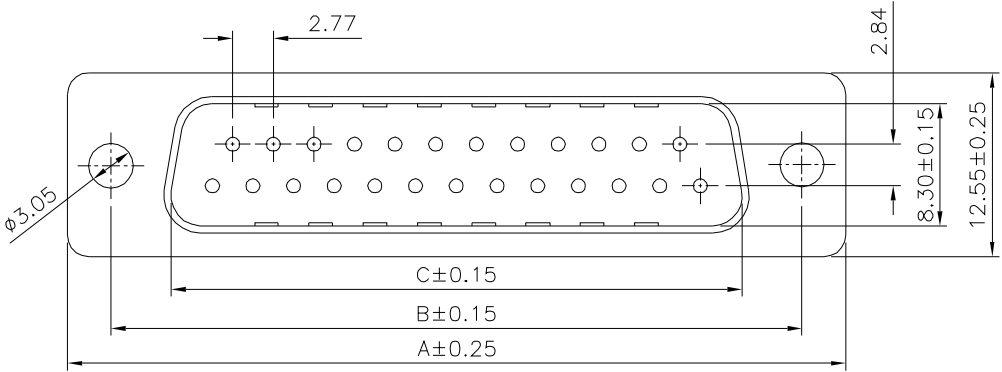

| Pin | A     | B     | C     | D     |
|-----|-------|-------|-------|-------|
| 09  | 30.80 | 25.00 | 16.92 | 19.20 |
| 15  | 39.20 | 33.30 | 25.25 | 27.60 |
| 25  | 53.05 | 47.04 | 38.96 | 41.10 |
| 37  | 69.40 | 63.50 | 55.42 | 57.30 |

4UCON

元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

22665

SCALE

NONE

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY

Michelle Lee


REV.

A2

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

.X ±0.38 .X\* ±3\*  
.XX ±0.25 .XX\* ±2\*  
.XXX ±0.10 .XXX\* ±1\*

UNIT  
mm



A2

Modify Data

HZF

12/03/2025

A1

Modify Data

HZF

05/07/2024

A0

NEW RELEASE

HZF

07/19/2017

NO. REV.

REVISIONS

CHK

DATE