

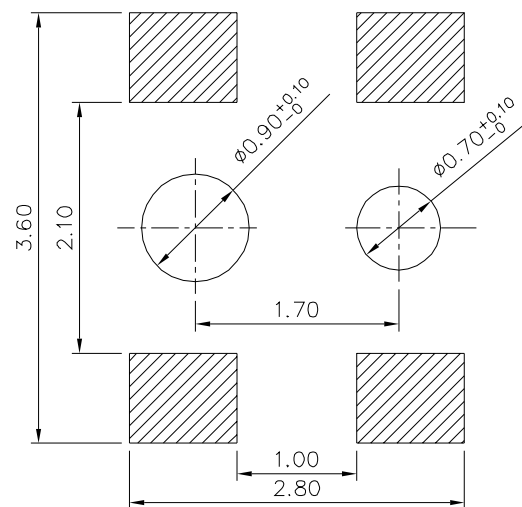
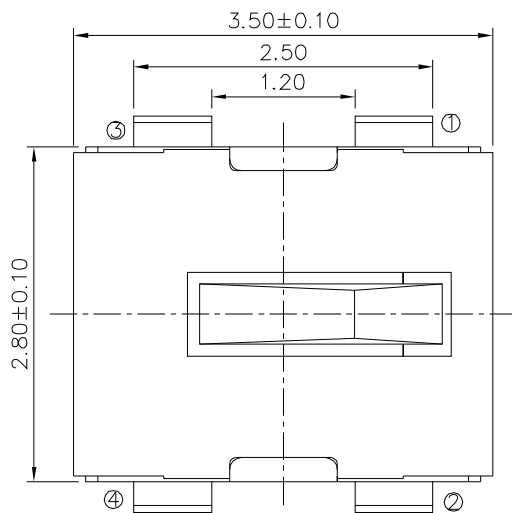

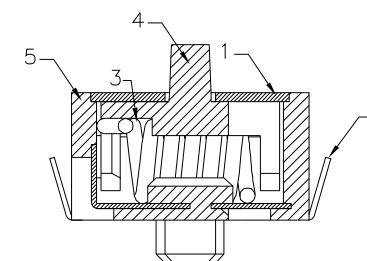


SPECIFICATION

Rating:1mA 5V DC
 Contact Resistance:2 Ohms Max.
 Insulation Resistance:100 Megaohms Min.
 At 100V DC/Minute
 Withstand Voltage:100V AC(50Hz Or 60Hz)
 For 1 Minute
 Operation Temperature:-40°C~+85°C
 RoHS Compliant

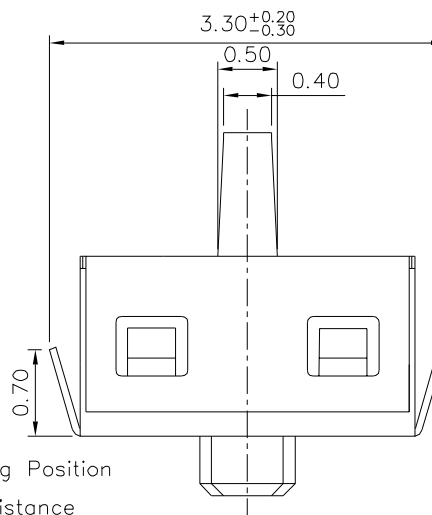

Recommended P.C.B. Layout(Top View)

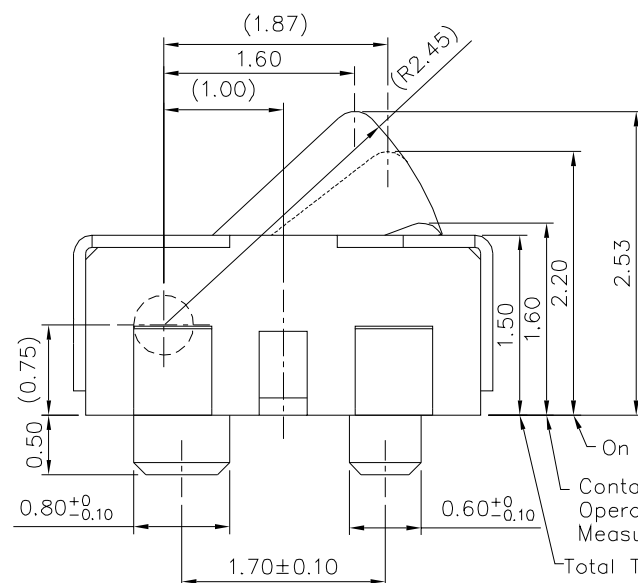

Item No.	Post Option
22756	With Post
22757	Without Post

No.	Description	Q'ty	Material	Remark
1	Cover	1	Stainless Steel	
2	Terminal	1	Phosphor Bronze	Silver Plated
3	Spring	1	Phosphor Bronze	Silver Plated
4	Stem	1	LCP	Black
5	Base	1	LCP	Black

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22756

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LSM

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.2

.XX ±0.2

.XXX ±0.2

SCALE


NONE

REV.

A0

UNIT

mm



△ A0

NEW RELEASE

HZF

02/05/2024

NO. REV.

REVISIONS

CHK

DATE