
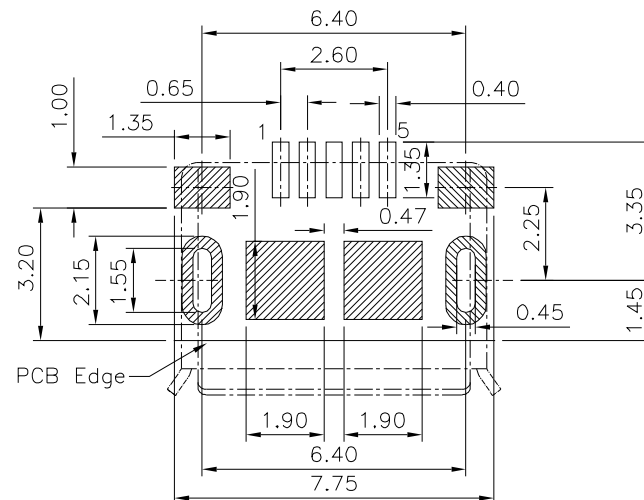
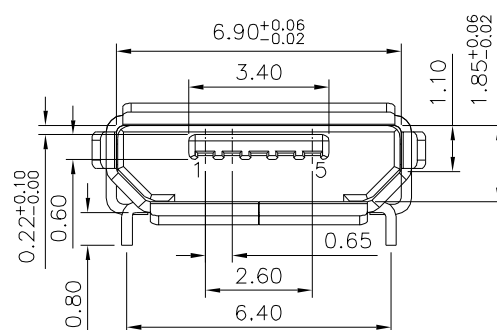
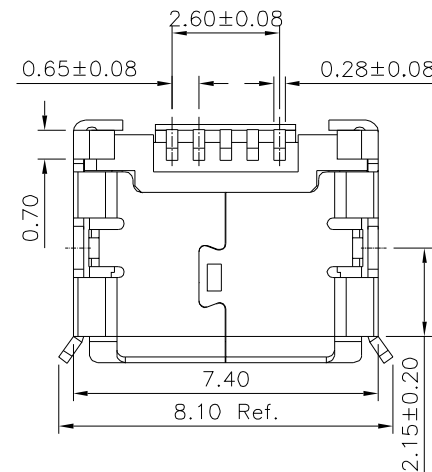
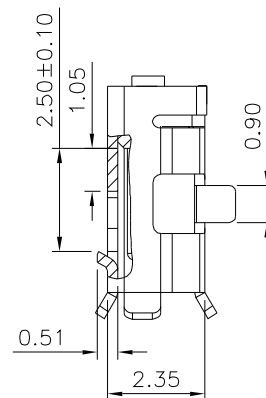
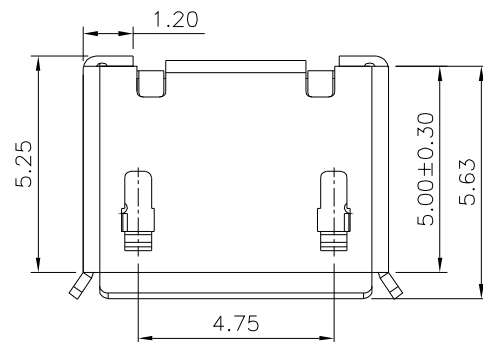



SPECIFICATION

Current Rating:1A Max.
Insulation Resistance:100 Megaohms Min.
Contact Resistance:50 Milliohms Max.
Withstand Voltage:100V AC/Minute
Operation Temperature:-30°C~+80°C
Mating Force:3.57Kgf Max.
Unmating Force:1.0Kgf Min.
Housing:LCP(UL94V-0),Black
Contact:Phosphor Bronze
Gold Flash Over Nickel
Shell:Stainless Steel
Matte Tin Plated
RoHS Compliant

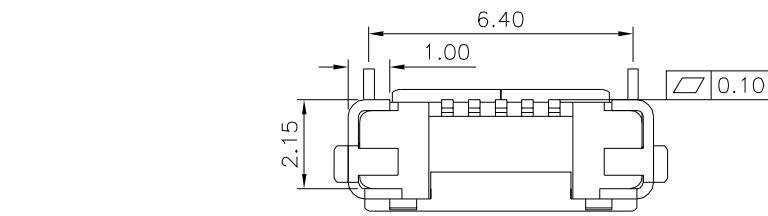

Recommended P.C.B Layout

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22761

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

ZHJ

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.25 .X* ±0.5*

.XX ±0.15

.XXX ±0.10

UNIT

mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

DATE

05/20/2023