

SPECIFICATION

Current Rating:2.0A

Withstand Voltage:500V AC/DC

Contact Resistance: 20 Milliohms Max.



Insulation Resistance:1000 Megaohms Min.

Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$


Contact: Phosphor Bronze, Gold Plated Over Nickel

① Insulator: PA9T+30%G.F.(UL94V-0), Black

RoHS Compliant

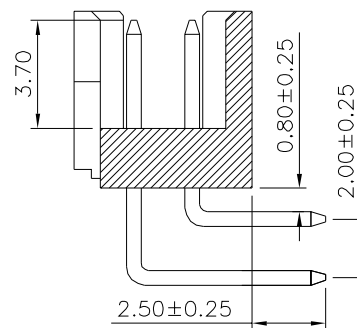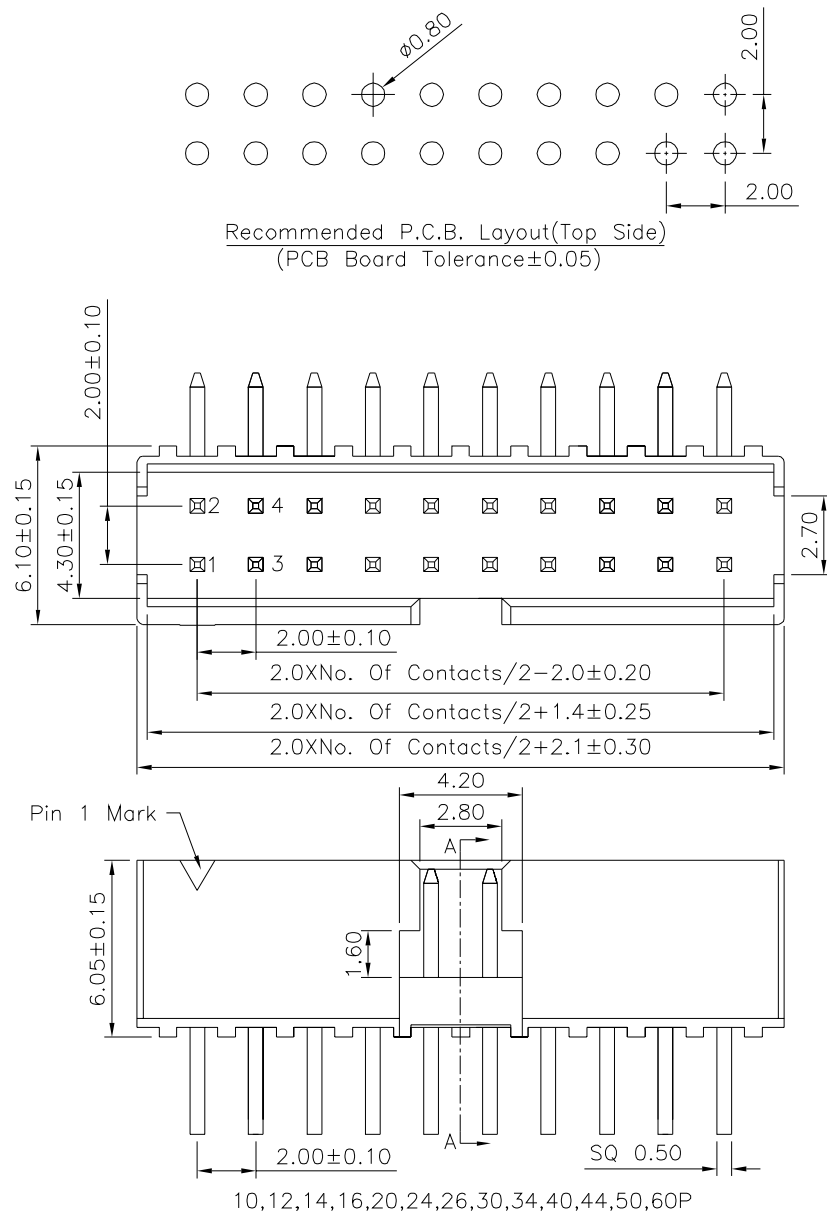

Section A-A

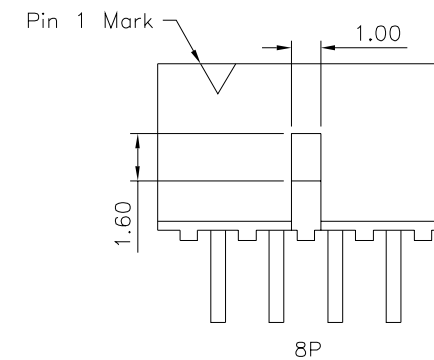

8P

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

22764

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X	± 0.40
.XX	± 0.25
.XXX	± 0.15
ANG.	$\pm 3^\circ$

UNI	mm
-----	----



$\triangle 1$	A1
---------------	----

Modify Data

HZF

09/27/2024

	0	AO
--	---	----

NEW RELEASE

HZF

08/14/2016

NO.	REV.
-----	------

REVISIONS

CHK

DATE
