





SPECIFICATION

Current Rating:3 Amp
Withstand Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C

Insulator:PBT(UL94V−0),Gray
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

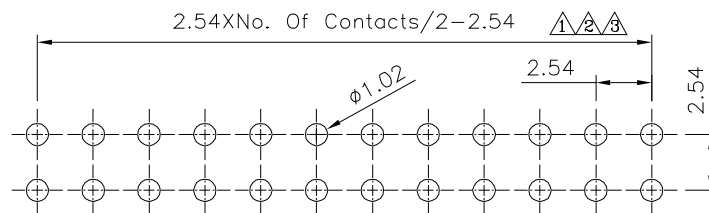

Recommended P.C.B. Layout
Tolerance:±0.05 (Top View)

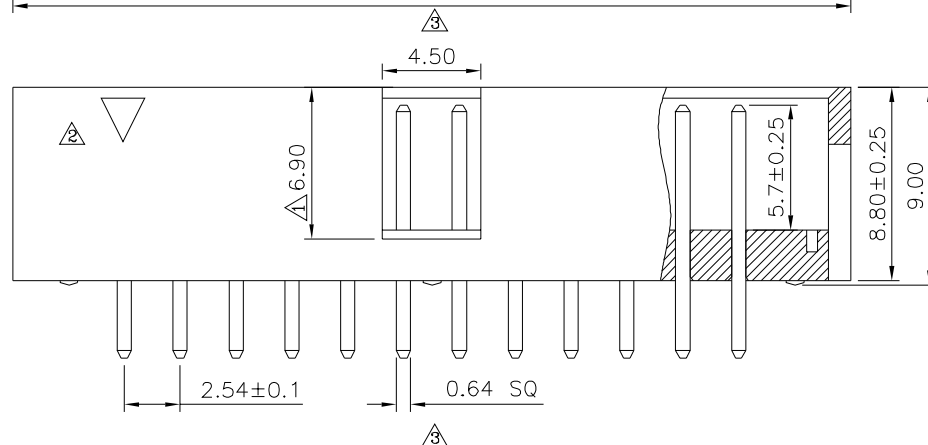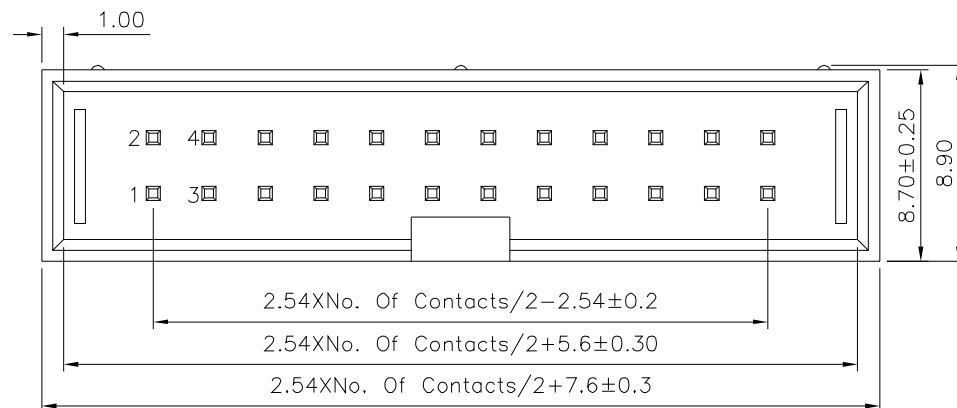

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 2

22772

SCALE NONE

APPROVED BY EMILY

CHECKED BY HZF


DRAWING BY HAO

REV. A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

△ X. ±0.25 X* ±2*
△ XX ±0.20 X* ±1.5*
△ XXX ±0.15 XX* ±1.0*
△ XXX ±0.1 XXX* ±0.5*

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△4	A4	Modify Data	HZF	01/10/2023
△3	A3	Modify Data	HZF	04/17/2015
△2	A2	Modify Data	HZF	11/20/2013
△1	A1	Modify Data	HZF	09/03/2013
△0	A0	NEW RELEASE	HZF	12/14/2010