


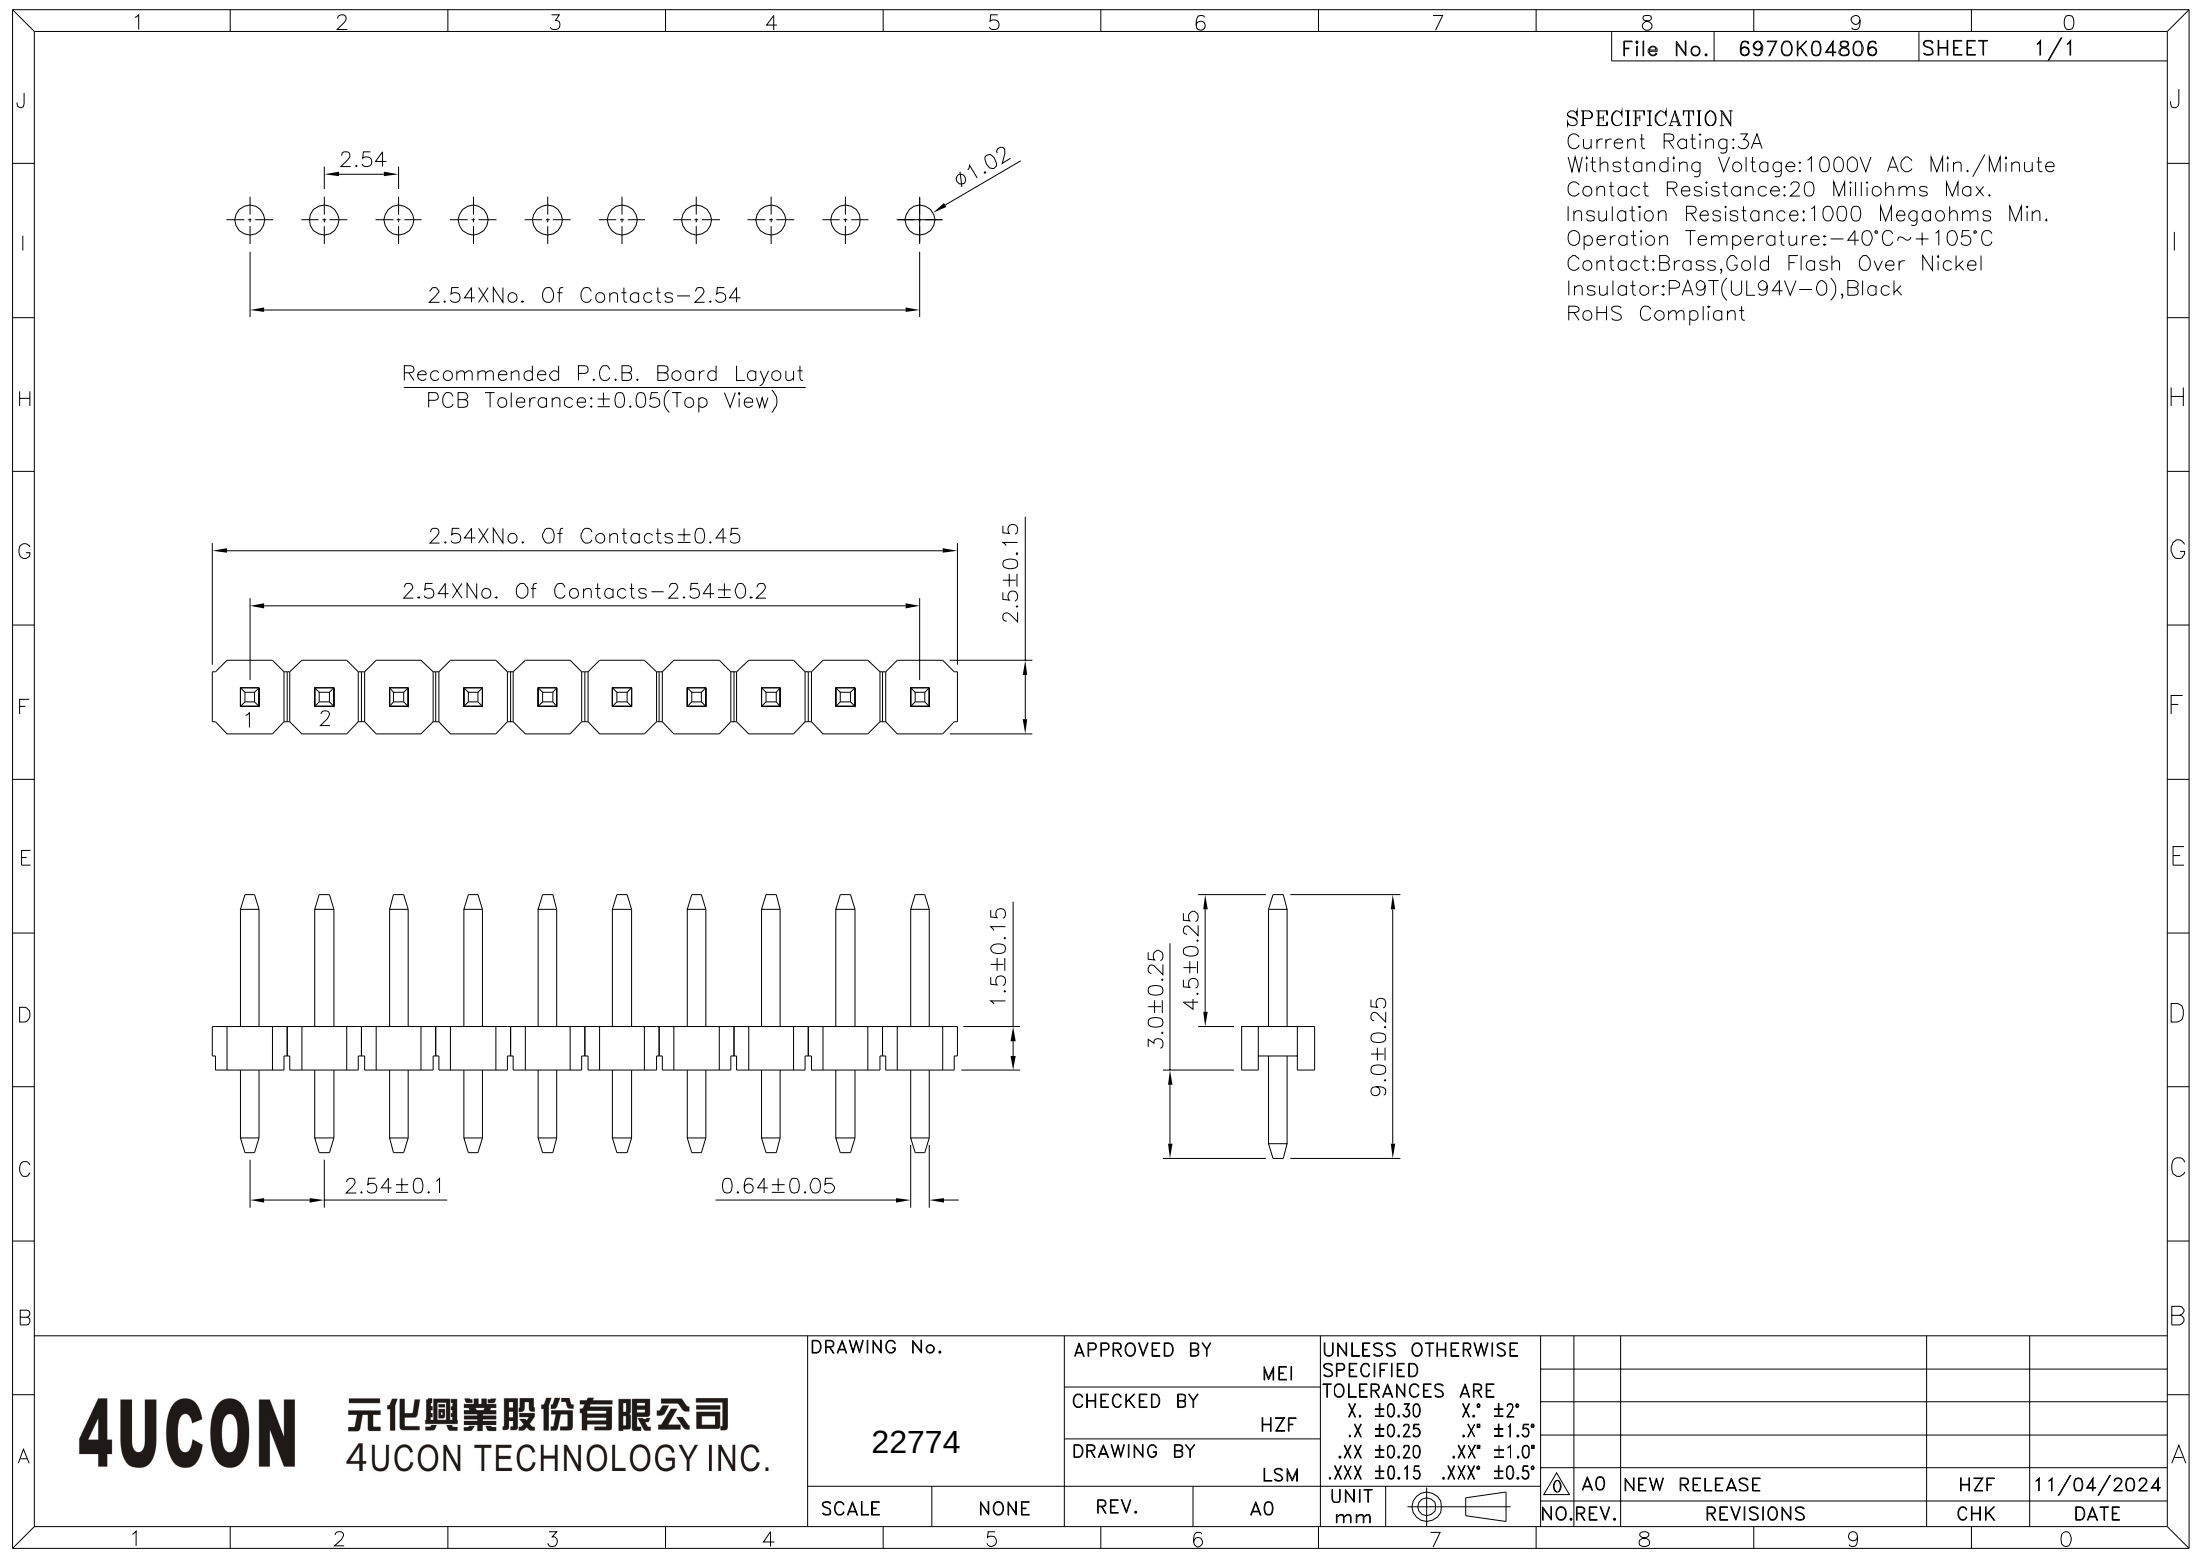

SPECIFICATION
Current Rating:3A
Withstanding Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA9T(UL94V-O),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 22774		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 X.* ±2° .X ±0.25 .X* ±1.5° .XX ±0.20 .XX* ±1.0° .XXX ±0.15 .XXX* ±0.5°								
		MEI										
		CHECKED BY										
		HZF										
		DRAWING BY		LSM								
		A0										
SCALE	NONE	REV.	A0	UNIT			A0	NEW RELEASE			HZF	11/04/2024
							NO.	REV.	REVISIONS		CHK	DATE
	5		6		7		8		9		0	