

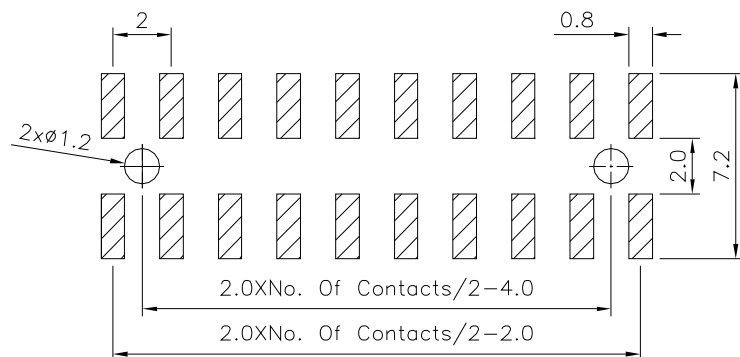



SPECIFICATION

Current Rating:1.5A
Withstand Voltage:500V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA9T(UL94V-0),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

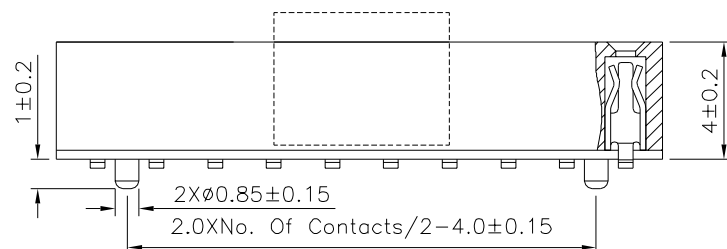

Recommend P.C.B Board Layout
PCB Tolerance:±0.05(Top View)

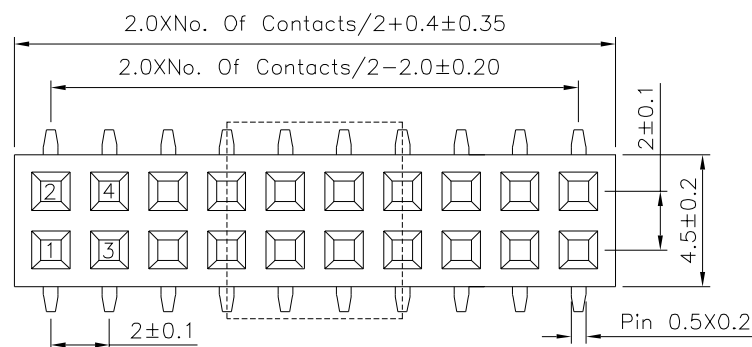

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22799

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LSM

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.30 X.* ±2°
.X ±0.25 .X* ±1.5°
.XX ±0.20 .XX* ±1.0°
.XXX ±0.15 .XXX* ±0.5°

UNIT

mm



NO.

REV.

AO

NEW RELEASE

REVISIONS

CHK

DATE

06/27/2024