
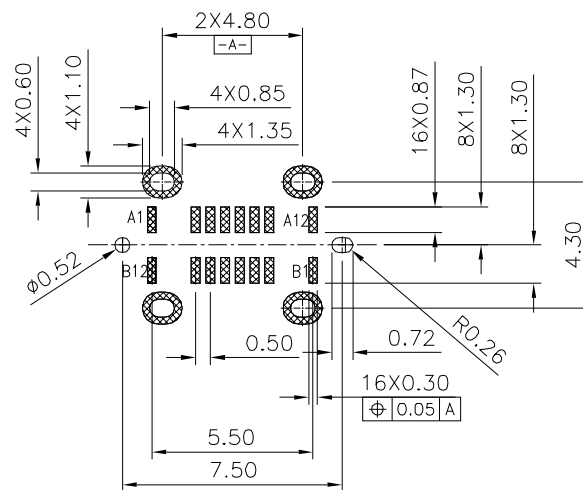

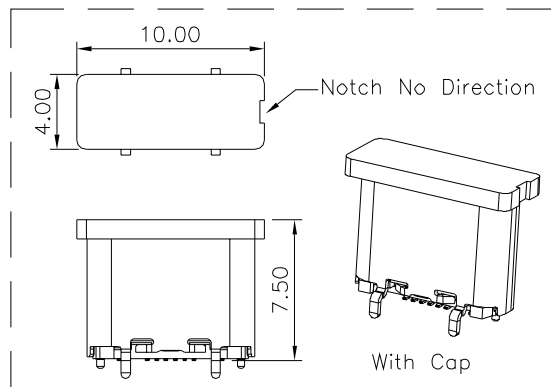

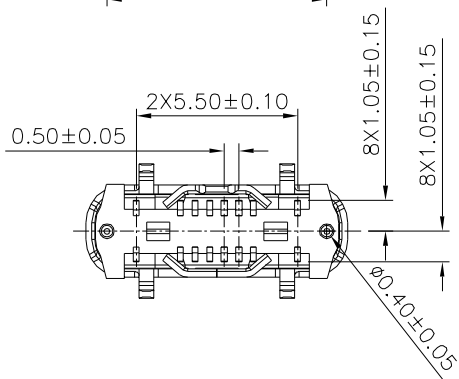
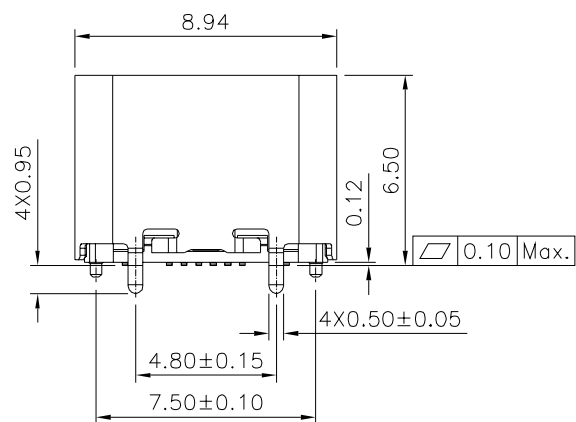


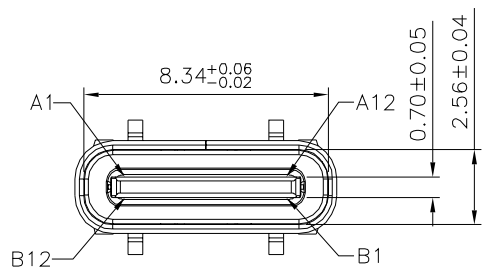

Recommended P.C.B. Layout(Top View)
Thickness:0.8±0.10(Tolerance±0.05)

SPECIFICATION

Current Rating:5.0A
Voltage Rating:5.0V/20V
LLCR:VBUS & GND Pins And Other Pins:
40 Milliohms/Pin Max.

Shield:50 Milliohms Max.
LLCR Max. Change Of All Pins:10 Milliohms
Insulation Resistance:100 Megaohms Min.
Withstand Voltage:100V AC/Minute
Insertion Force:0.5~2.0kgf.
Extraction Force:0.8~2.0kgf.

0.6~2.0kgf. After Durability Test
Durability:10000 Cycles
Operation Temperature:-25°C~+85°C
Housing:LCP(UL94V-0),Black
Contact:Copper Alloy,Gold Plated On Contact Area,
Gold Flash On Solder Tails,Over Nickel
Shell:Stainless Steel,Nickel Plated
MID Plate:Stainless Steel,Clear Only
RoHS Compliant

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

22814

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LZX

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE


.X ±0.30

.XX ±0.25

.XXX ±0.10

UNIT

mm



NO.

REV.

A1 Modify Data

A0 NEW RELEASE

REVISIONS

HZF

HZF

CHK

12/25/2023

06/07/2023

DATE