




SPECIFICATION
Conductive Resistance:3 Ohms Max.
Insulation Resistance:300V DC/0.01 SEC,5 Megaohms Min.
Open/Short/Intermittence 100% Test
RoHS Compliant

Pin Assignment	
P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14

No.	Name	Q'ty	Description
①	Wire	---	UL2651 28AWG,PH1.27mm 14P Gray Flat Cable
②	Connector	1 PCS	PH2.54mm IDC Socket Without SR,14P,Black
③	Connector	1 PCS	PH2.54mm IDC Plug 0.1",14P,Black Selective Gold Flash

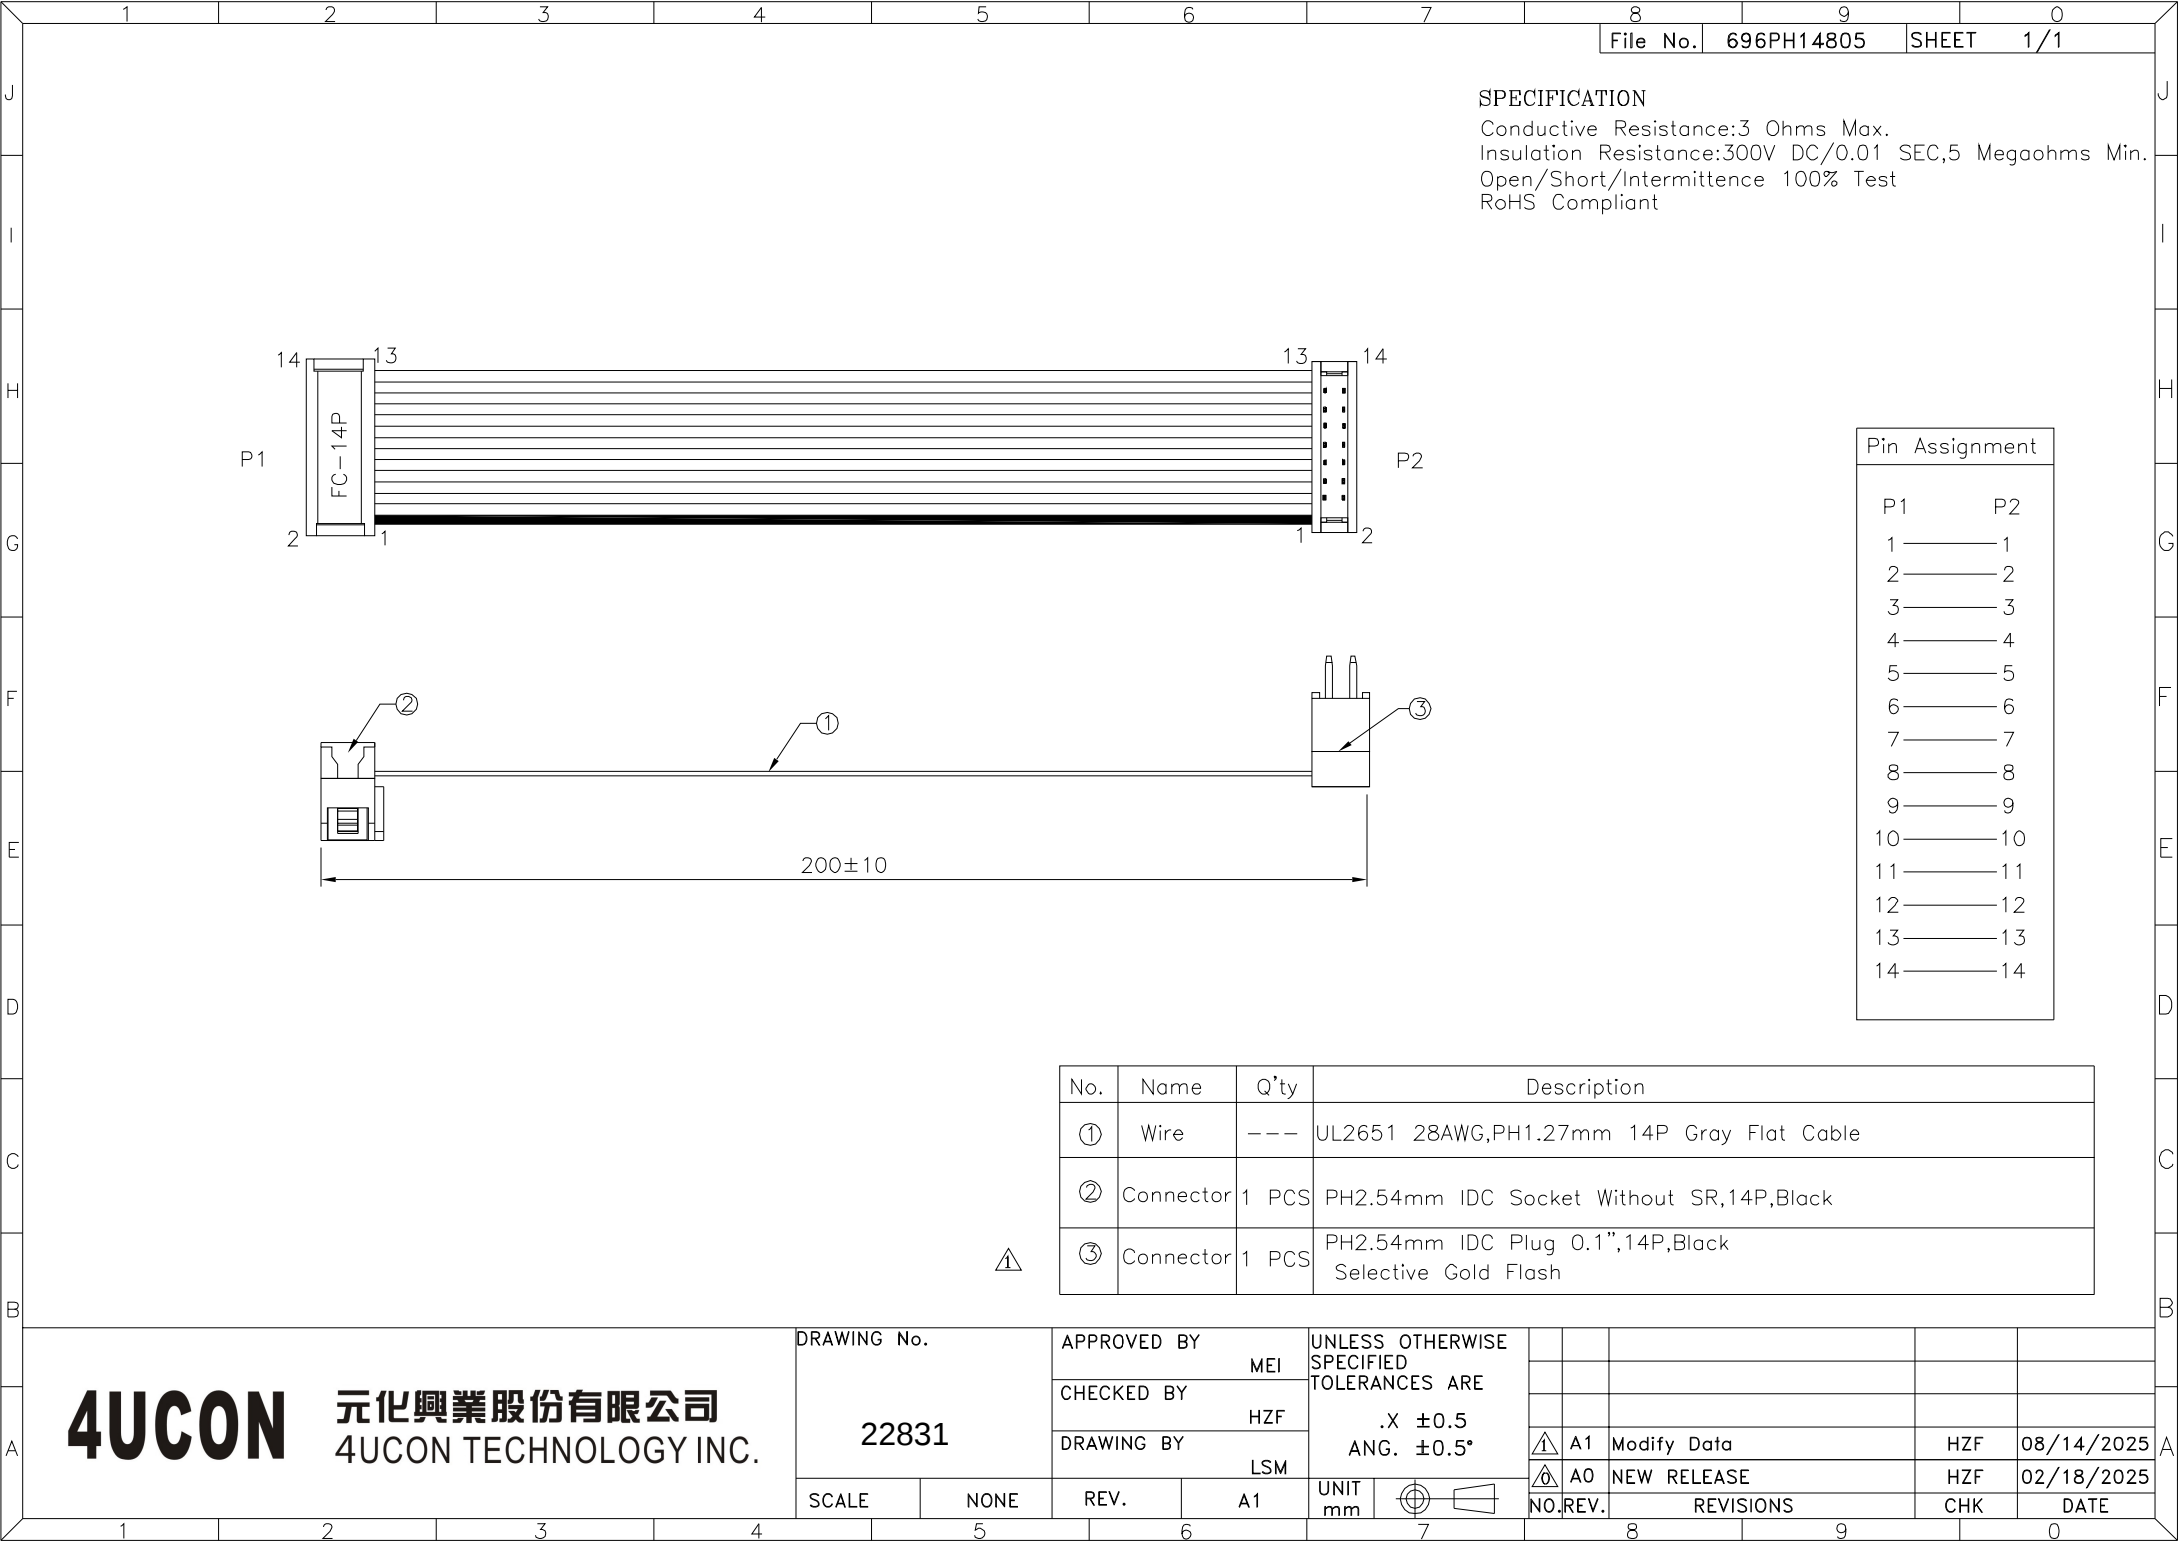

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.


22831

APPROVED BY	MEI
CHECKED BY	HZF
DRAWING BY	LSM
REV.	A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.5
ANG. ±0.5°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△	A1	Modify Data	HZF	08/14/2025
△	A0	NEW RELEASE	HZF	02/18/2025