

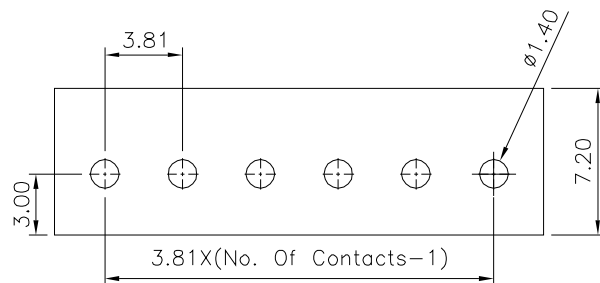

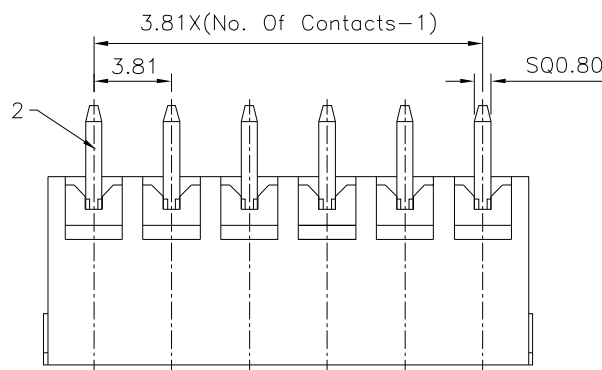


# SPECIFICATION

Current Rating:8A  
Voltage Rating:300V  
Withstanding Voltage:1600V/Minute  
Operation Temperature:-40°C~+105°C  
RoHS Compliant  
\* 02~24P Available~

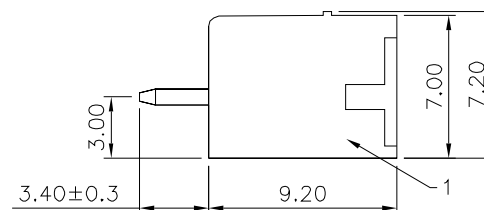

Recommended P.C.B. Layout

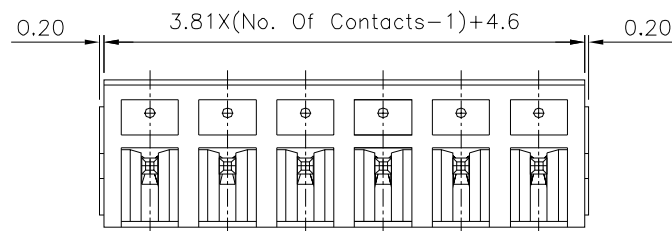

| Item | Name    | Material      | Notes      |
|------|---------|---------------|------------|
| 1    | Housing | PA66(UL94V-0) | Green      |
| 2    | Pin     | Copper Alloy  | Tin Plated |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

22835

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LSM

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
0<L≤6 ±0.20  
6<L≤10 ±0.30  
10<L≤30 ±0.50  
30<L≤60 ±0.70  
60<L≤100 ±1.00  
100<L≤160 ±1.30  
160<L ±1.60


SCALE

NONE

REV.

A0

UNIT  
mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

DATE

08/22/2024