
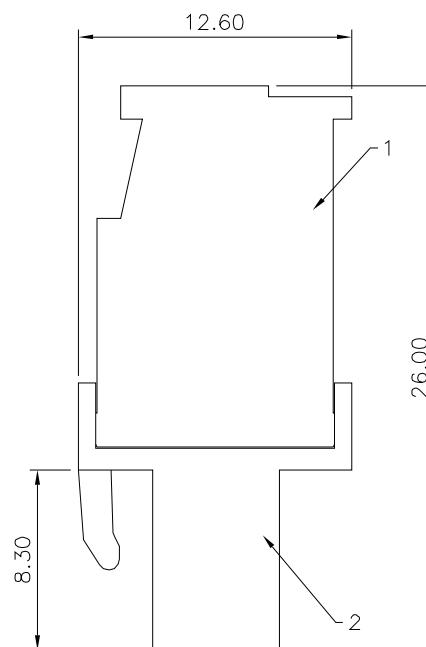
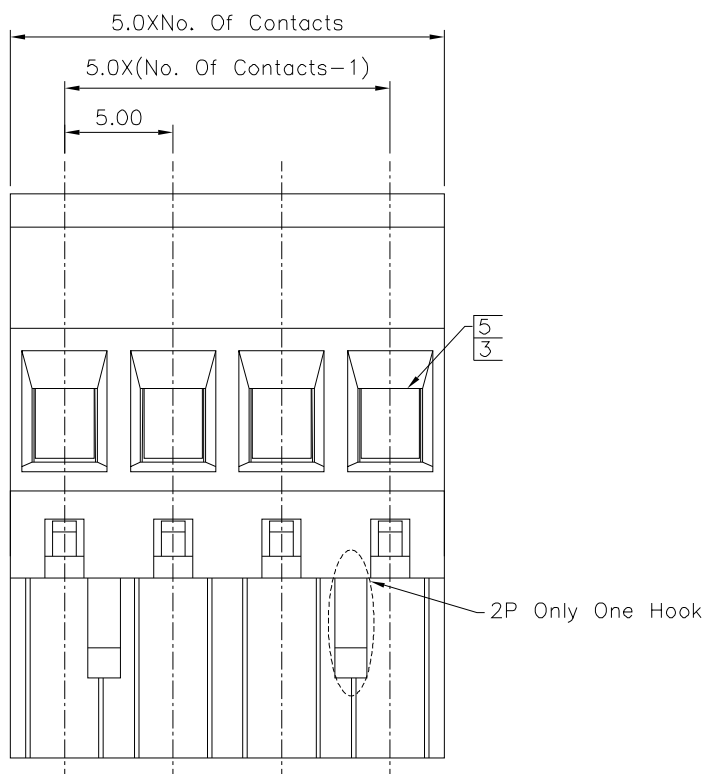


SPECIFICATION

Current Rating:15A
Voltage Rating:300V
Withstanding Voltage:1600V/Minute
Operation Temperature:-40°C~+105°C
Wire Range:28-12 AWG
Screw/Torque:M3/0.5N.m Max.
RoHS Compliant
* Q2~24P Available~

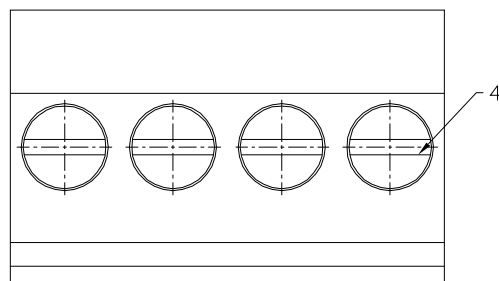

Item	Name	Material	Notes
1	Housing	PA66(UL94V-0)	Green
2	Cover	PA66(UL94V-0)	Green
3	Cage	Copper Alloy	M3/Nickel Plated
4	Screw	Steel	M3/Zinc Plated
5	Clamp	Copper Alloy	Nickel Plated

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

22850

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LSM

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

$0 < L \leq 6$	± 0.20
$6 < L \leq 10$	± 0.30
$10 < L \leq 30$	± 0.50
$30 < L \leq 60$	± 0.70
$60 < L \leq 100$	± 1.00
$100 < L \leq 160$	± 1.30
$160 < L$	± 1.60

 $\triangle 0$

	AO
--	----

0	NEW RELEASE
---	-------------

REVISIONS

HZP

CHK

08/22/2024

DATE _____