
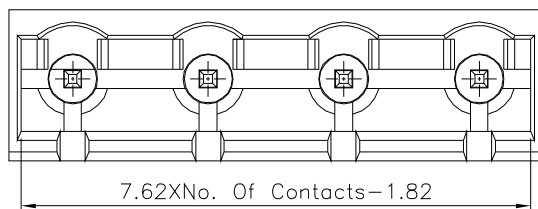


Recommended P.C.B. Layout

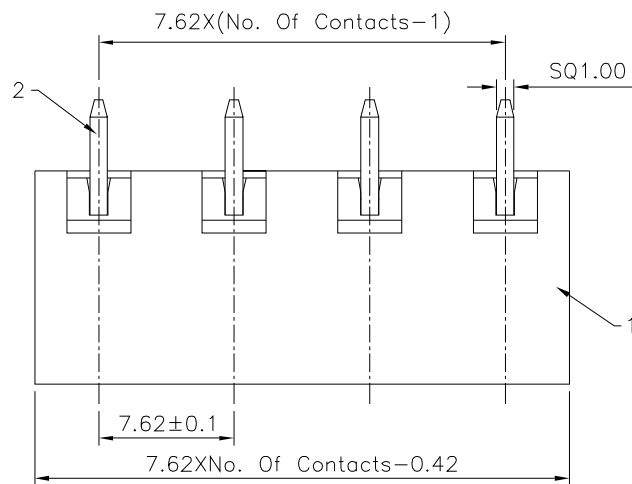

SPECIFICATION

Current Rating:15A

Voltage Rating:300V

Withstanding Voltage:1600V/Minute

Operation Temperature:-40°C~+105°C

RoHS Compliant

* 02~24P Available~

Item	Name	Material	Notes
1	Housing	PA66(UL94V-0)	Green
2	Pin	Copper Alloy	Tin Plated

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22851

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

LSM

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

0<L≤6 ±0.20
6<L≤10 ±0.30
10<L≤30 ±0.50
30<L≤60 ±0.70
60<L≤100 ±1.00
100<L≤160 ±1.30
160<L ±1.60

UNIT
mm



NO.

REV.

A0

NEW RELEASE

HZF

08/21/2024

CHK

DATE