
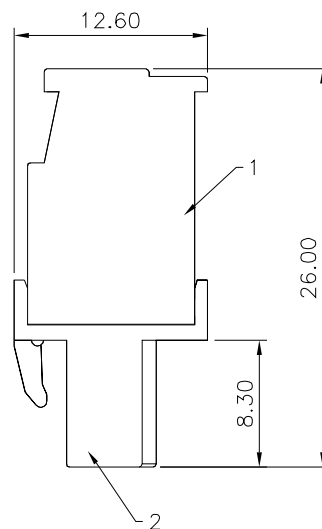
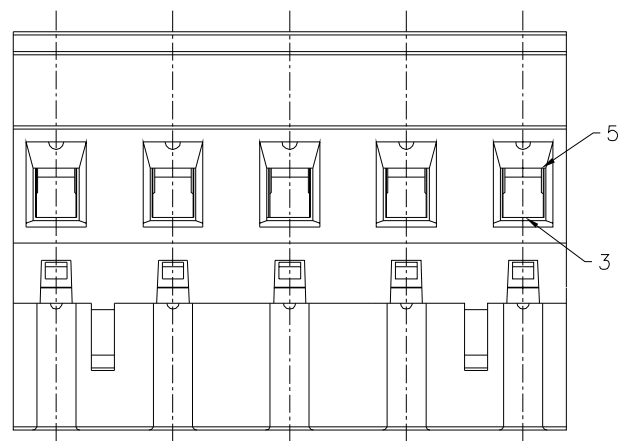


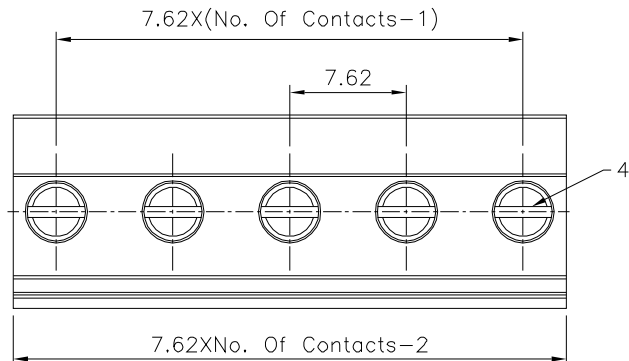

# SPECIFICATION

Current Rating:15A  
Voltage Rating:300V  
Withstanding Voltage:1600V/Minute  
Operation Temperature:-40°C~+105°C  
Wire Range:28-12 AWG  
Screw/Torque:M3/0.5N.m Max.  
RoHS Compliant  
\* 02~24P Available~

| Item | Name    | Material      | Notes          |
|------|---------|---------------|----------------|
| 1    | Housing | PA66(UL94V-0) | Green          |
| 2    | Cover   | PA66(UL94V-0) | Green          |
| 3    | Cage    | Copper Alloy  | Nickel Plated  |
| 4    | Screw   | Steel         | M3/Zinc Plated |
| 5    | Clamp   | Copper Alloy  | Tin Plated     |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

22852

SCALE

NONE

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

LSM

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
0<L≤6 ±0.20  
6<L≤10 ±0.30  
10<L≤30 ±0.50  
30<L≤60 ±0.70  
60<L≤100 ±1.00  
100<L≤160 ±1.30  
160<L ±1.60

UNIT  
mm



NO.

REV.

NEW RELEASE

REVISIONS

HZF

CHK

08/27/2024

DATE