

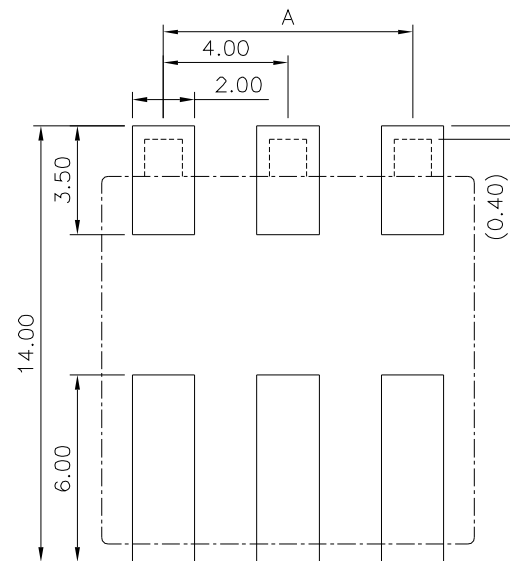
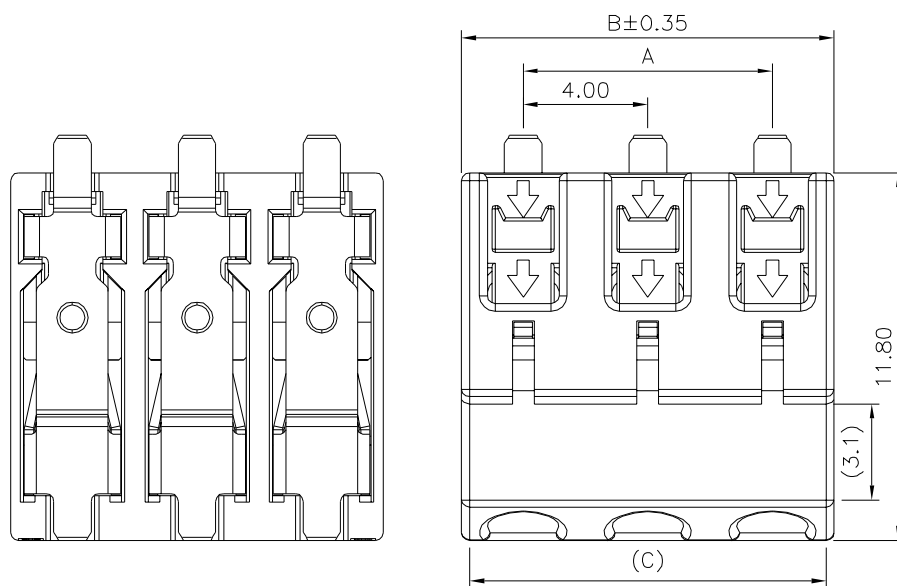


SPECIFICATION

Applicable Wire Range:
 (Outside Wire Insulation: 2.1mm Dia. Max.)
 Solid Wire: AWG #24~#18
 Strand Wire: AWG #22~#20
 Contact: Phosphor Bronze, Tin Plated Over Nickel
 Insulator: PA9T(UL94V-0), Cream
 Cover: PA9T(UL94V-0), Cream
 RoHS Compliant

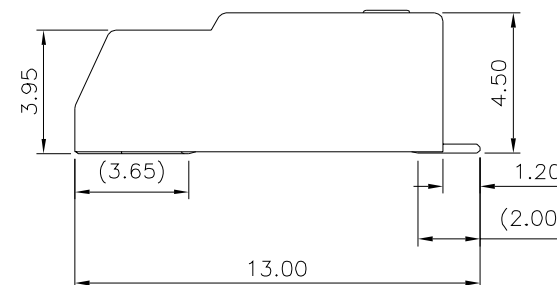

Recommended P.C.B. Layout
 Tolerance: ±0.05 (Top View)

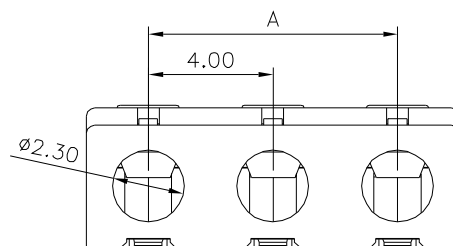

Pin	A	B	C
01	--	3.95	3.45
02	4.00	7.95	7.45
03	8.00	11.95	11.45

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22853

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LSM

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.25
 .XX ±0.15
 ANG. ±3°

SCALE

NONE

REV.

A0

UNIT

mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

03/10/2024

DATE