
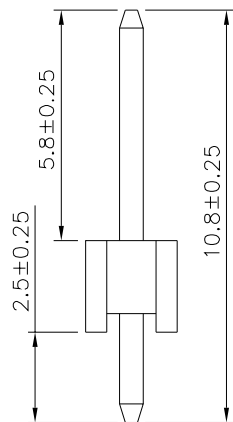
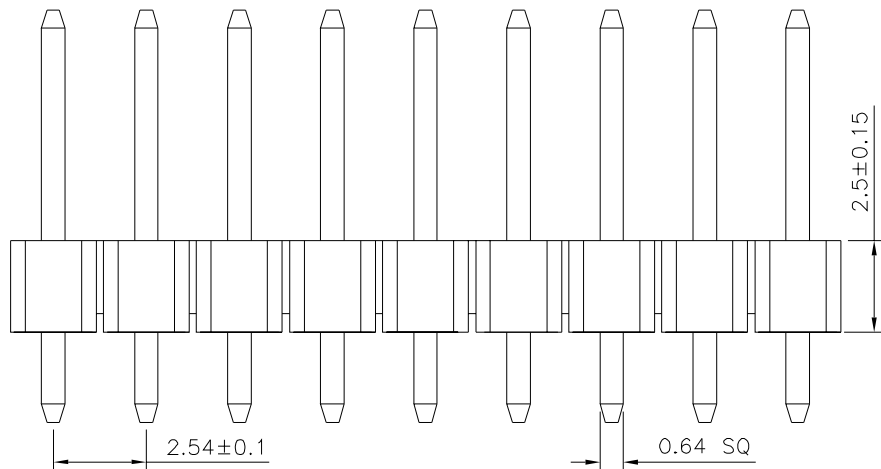


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

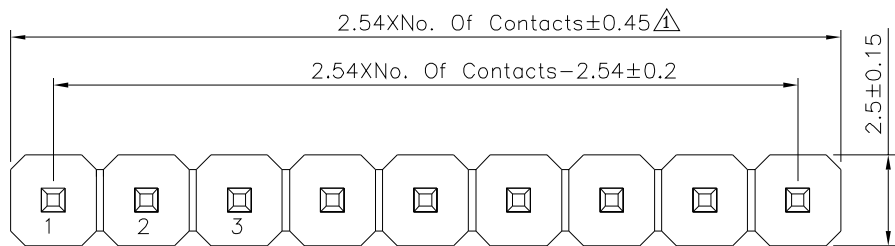

SPECIFICATION

Current Rating:3A

Withstand Voltage:1000V AC Min./Minute

Contact Resistance:20 Milliohms Max.

Insulation Resistance:1000 Megaohms Min.

Operation Temperature:-40°C~+105°C

Contact:Brass,Gold Flash Over Nickel

Insulator:PA9T(UL94V-0),Black

RoHS Compliant

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22870

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.25 X.± ±2°
.X ±0.20 .X.± ±1.5°
.XX ±0.15 .XX.± ±1°
.XXX ±0.10 .XXX.± ±0.5°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△	A2	Modify Data	HZF	11/15/2023
△	A1	Modify Data	HZF	12/02/2021
△	A0	NEW RELEASE	HZF	01/04/2015