

SPECIFICATION

1.Material&Finish:

Insulator:PA9T(UL94V-0),Black
Contact:Phosphor Bronze
Gold Flash Over Nickel






2.Electrical Characteristics:

Current Rating:0.5A/Pin
Voltage Rating:50V AC/DC


3.Environmental Characteristics:

Operation Temperature:-55°C~+125°C

4.RoHS Compliant

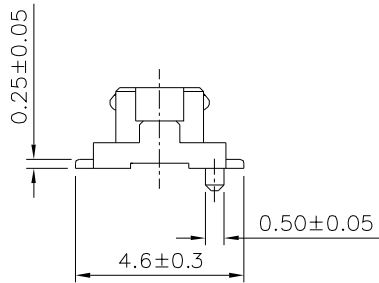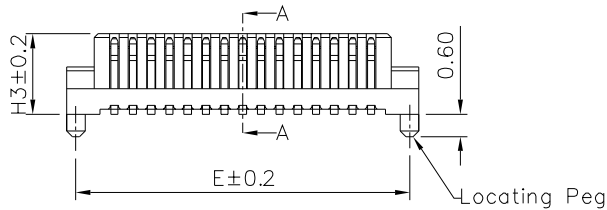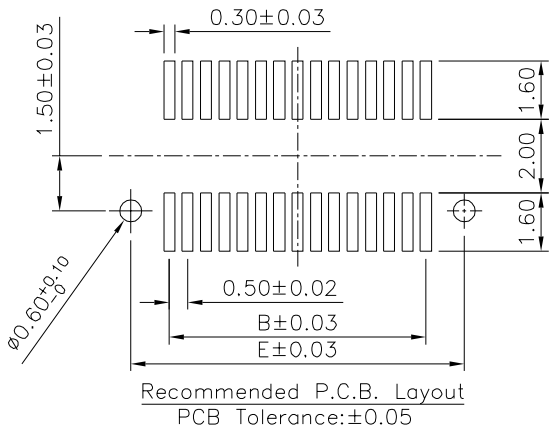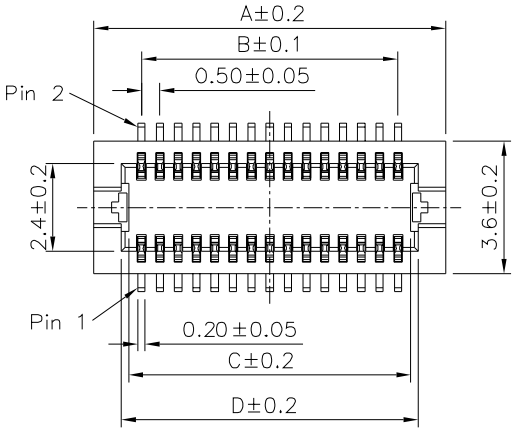

Pin	A	B	C	D	E
10	4.6	2.0	2.7	3.1	4.1
14	5.6	3.0	3.7	4.1	5.1
20	7.1	4.5	5.2	5.6	6.6
30	9.6	7.0	7.7	8.1	9.1
32	10.1	7.5	8.2	8.6	9.6
36	11.1	8.5	9.2	9.6	10.6
40	12.1	9.5	10.2	10.6	11.6
50	14.6	12.0	12.7	13.1	14.1
60	17.1	14.5	15.2	15.6	16.6
80	22.1	19.5	20.2	20.6	21.6
100	27.1	24.5	25.2	25.6	26.6
120	32.1	29.5	30.2	30.6	31.6



Series No.(Female)	10	14	20	30	32	36	40	50	60	80	100	120
16221	1000		1000	1000		1000	1000	1000	1000	1000	1000	
16222			1000	1000		1000	1000	1000	1000	1000		

Series No.(Female)	Series No.(Male)	Female Height(H3)	Height(H4)	Male Height	Stacking Height(H)
16221	16223	2.20	1.50	2.30	3.00
16222	16224	2.70	2.00	2.80	3.50
	16225			3.30	4.00
	16226			4.30	5.00


4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.
22880

APPROVED BY
MEI
CHECKED BY
HZF
DRAWING BY
LSM

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.30 X.* ±3°
.X ±0.25 .X.* ±2°
.XX ±0.20

SCALE NONE REV. A0



NEW RELEASE HZF 05/27/2024
NO.REV. REVISIONS CHK DATE