
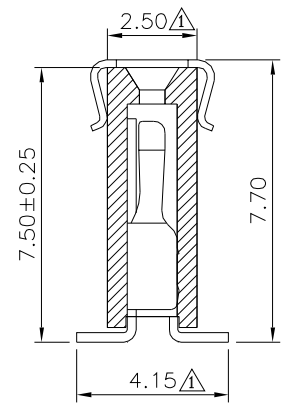
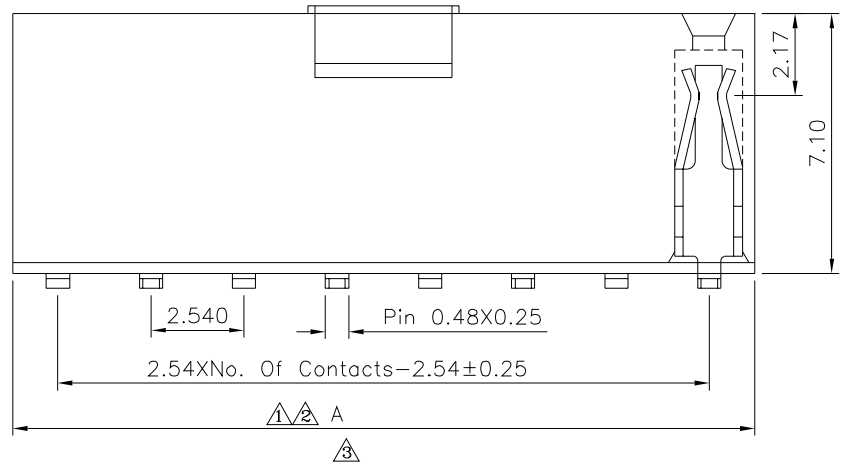


Recommended P.C.B. Layout

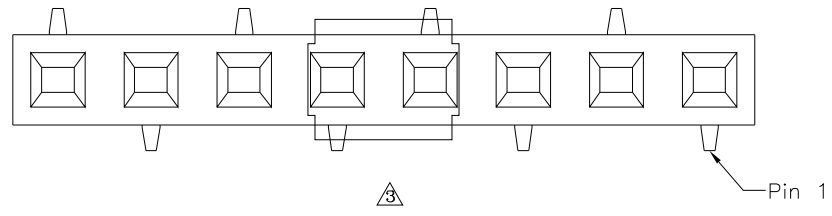

△ SPECIFICATION

Current Rating:3 Amp
 Dielectric Withstanding:600V AC/DC
 Insulation Resistance:1000 Megaohms Min.
 Contact Resistance:20 Milliohms Max.
 Operation Temperature:-40°C~+105°C
 △ Contact:Phosphor Bronze,Gold Flash Over Nickel
 Insulator:PA6T(UL94V-0),Black
 RoHS Compliant

△	Pin	A	Pin	A
02	5.08	22	56.38	
03	7.62	23	58.92	
04	10.66	24	61.46	
05	13.20	25	64.00	
06	15.74	26	66.54	
07	18.28	27	69.08	
08	20.82	28	71.62	
09	23.36	29	74.16	
10	25.90	30	76.70	
11	28.44	31	79.24	
12	30.98	32	81.78	
13	33.52	33	84.32	
14	36.06	34	86.86	
15	38.60	35	89.40	
16	41.14	36	91.94	
17	43.68	37	94.48	
18	46.22	38	97.02	
19	48.76	39	99.56	
20	51.30	40	102.10	
21	53.84			

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.35 .XX ±0.25 .XXX ±0.05	
22890		MEI			
		CHECKED BY	HZF		
		DRAWING BY	CYP		
SCALE	NONE	REV.	A3	UNIT	mm

NO.	REV.	REVISIONS	CHK	DATE
△	A3	Modify Data	HZF	04/23/2020
△	A2	Modify Data	HZF	06/09/2015
△	A1	Modify Data	HZF	08/31/2009
△	A0	NEW RELEASE	SHIN	08/14/2006