


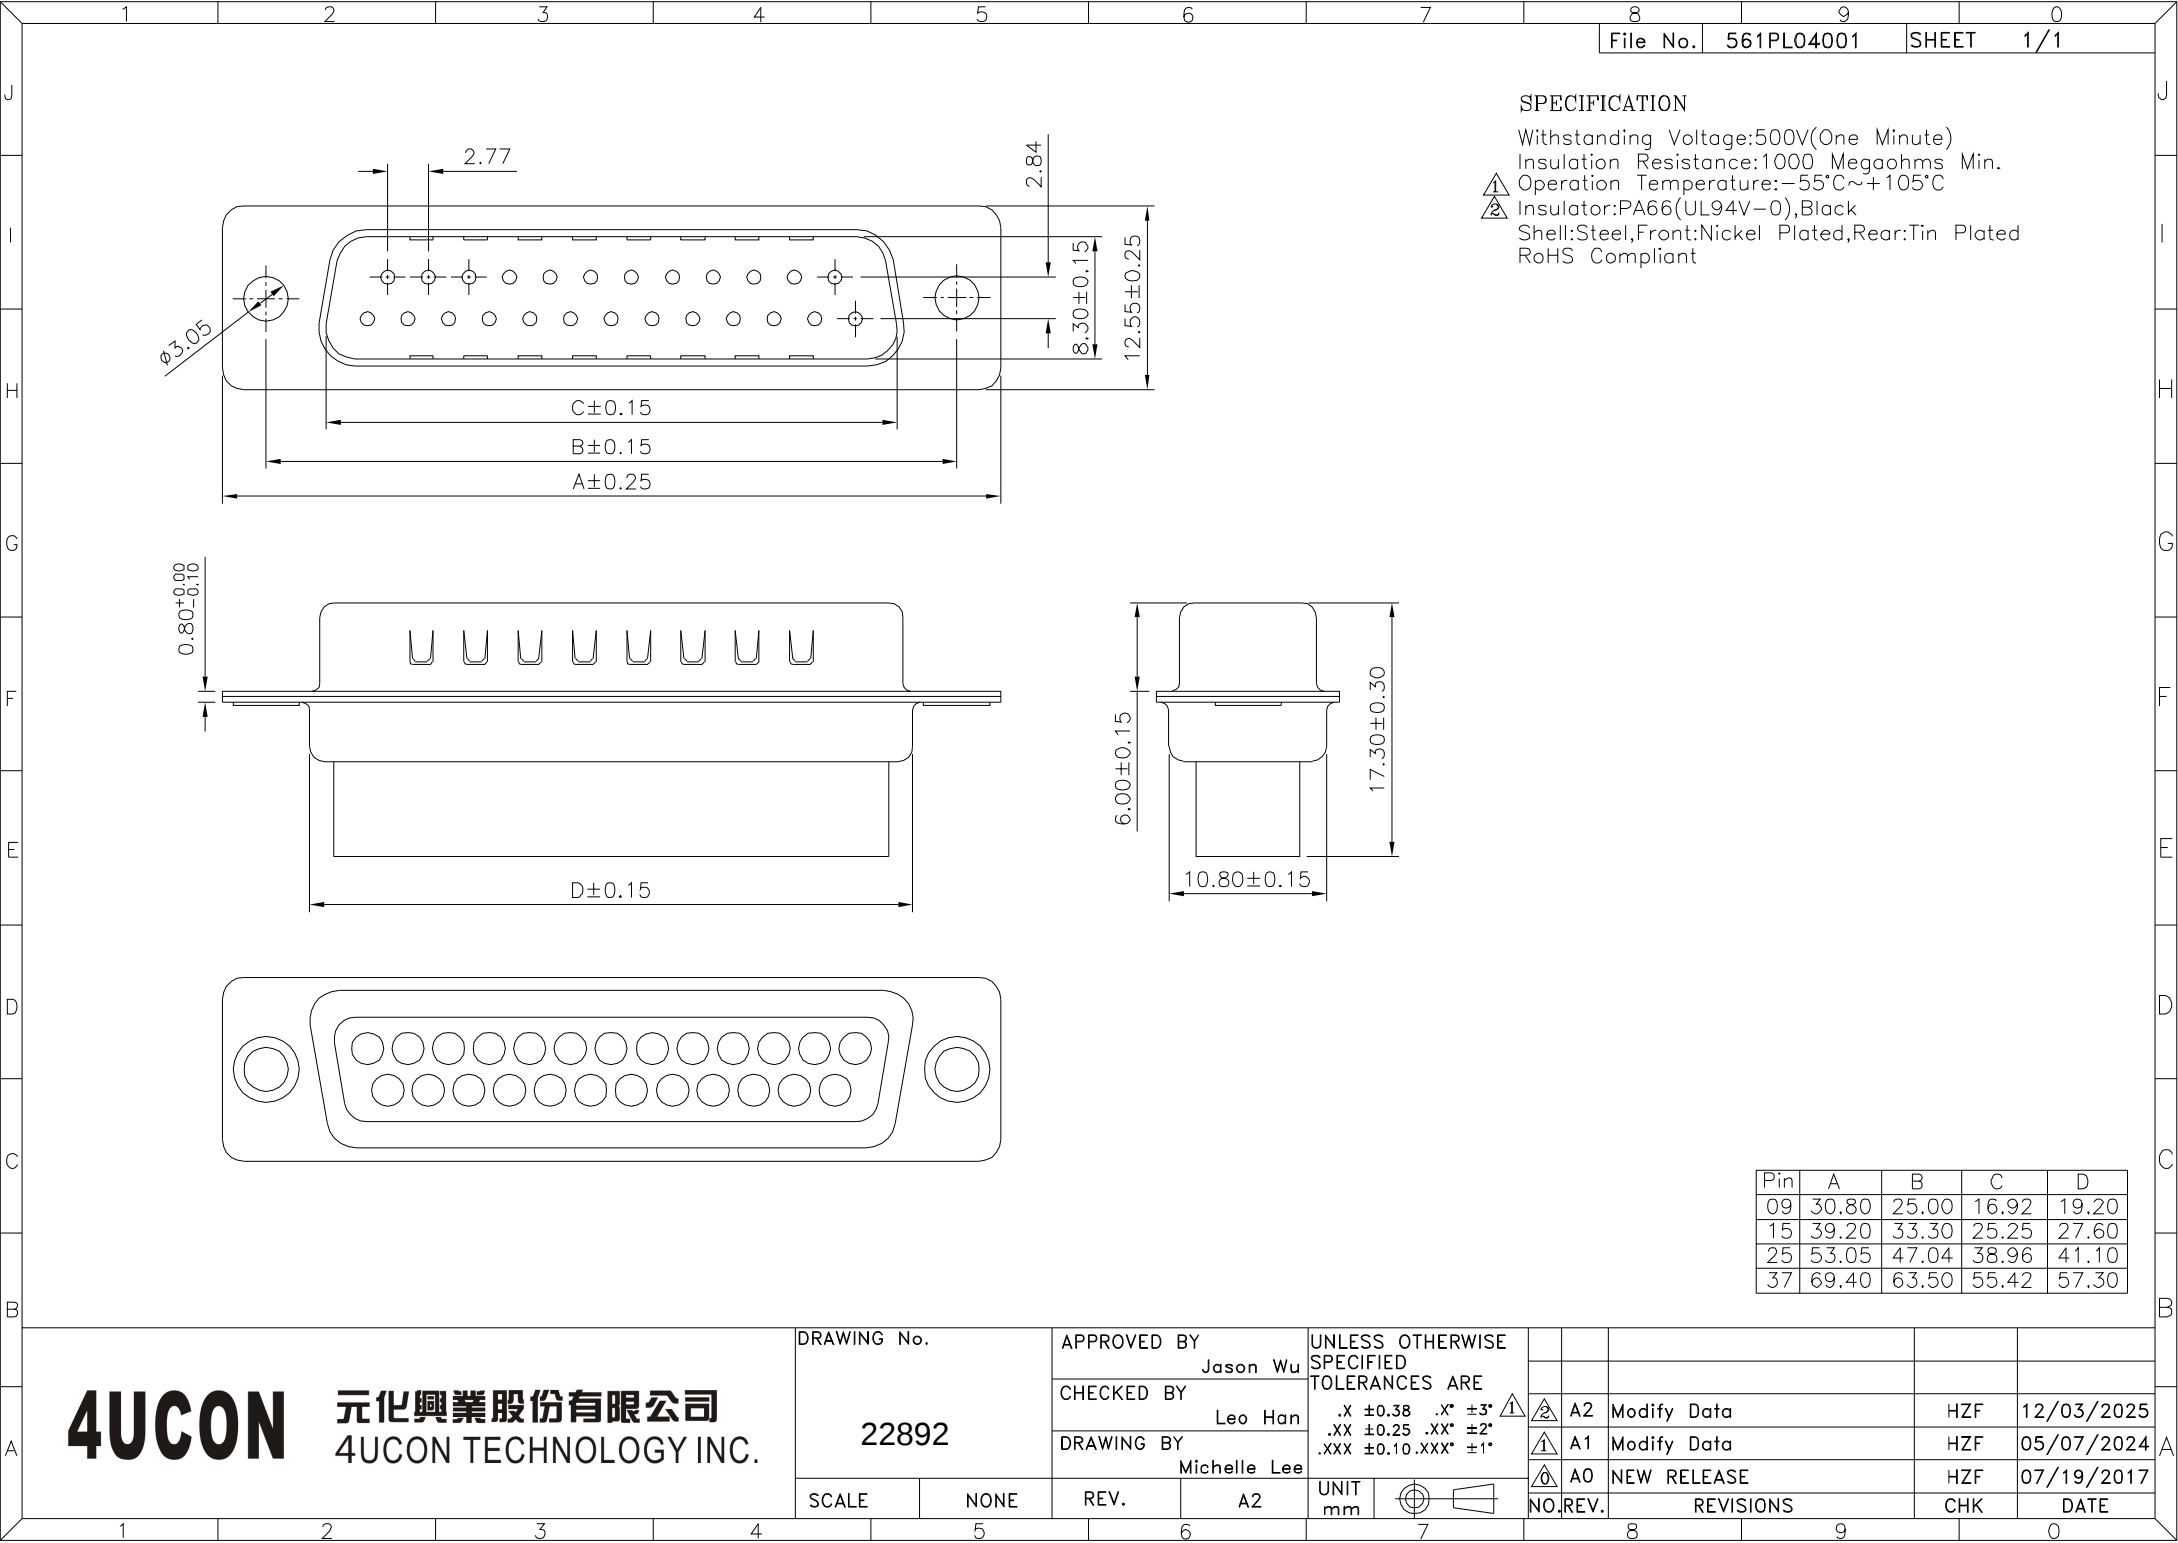

SPECIFICATION

Withstanding Voltage:500V(One Minute)
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-55°C~+105°C
Insulator:PA66(UL94V-0),Black
Shell:Steel,Front:Nickel Plated,Rear:Tin Plated
RoHS Compliant

Pin	A	B	C	D
09	30.80	25.00	16.92	19.20
15	39.20	33.30	25.25	27.60
25	53.05	47.04	38.96	41.10
37	69.40	63.50	55.42	57.30

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22892

SCALE

NONE

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY

Michelle Lee


REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ± 0.38 .X* $\pm 3^{\circ}$
.XX ± 0.25 .XX* $\pm 2^{\circ}$
.XXX ± 0.10 .XXX* $\pm 1^{\circ}$

UNIT
mm



A2

Modify Data

HZF

12/03/2025

A1

Modify Data

HZF

05/07/2024

A0

NEW RELEASE

HZF

07/19/2017

NO. REV.

REVISIONS

CHK

DATE