



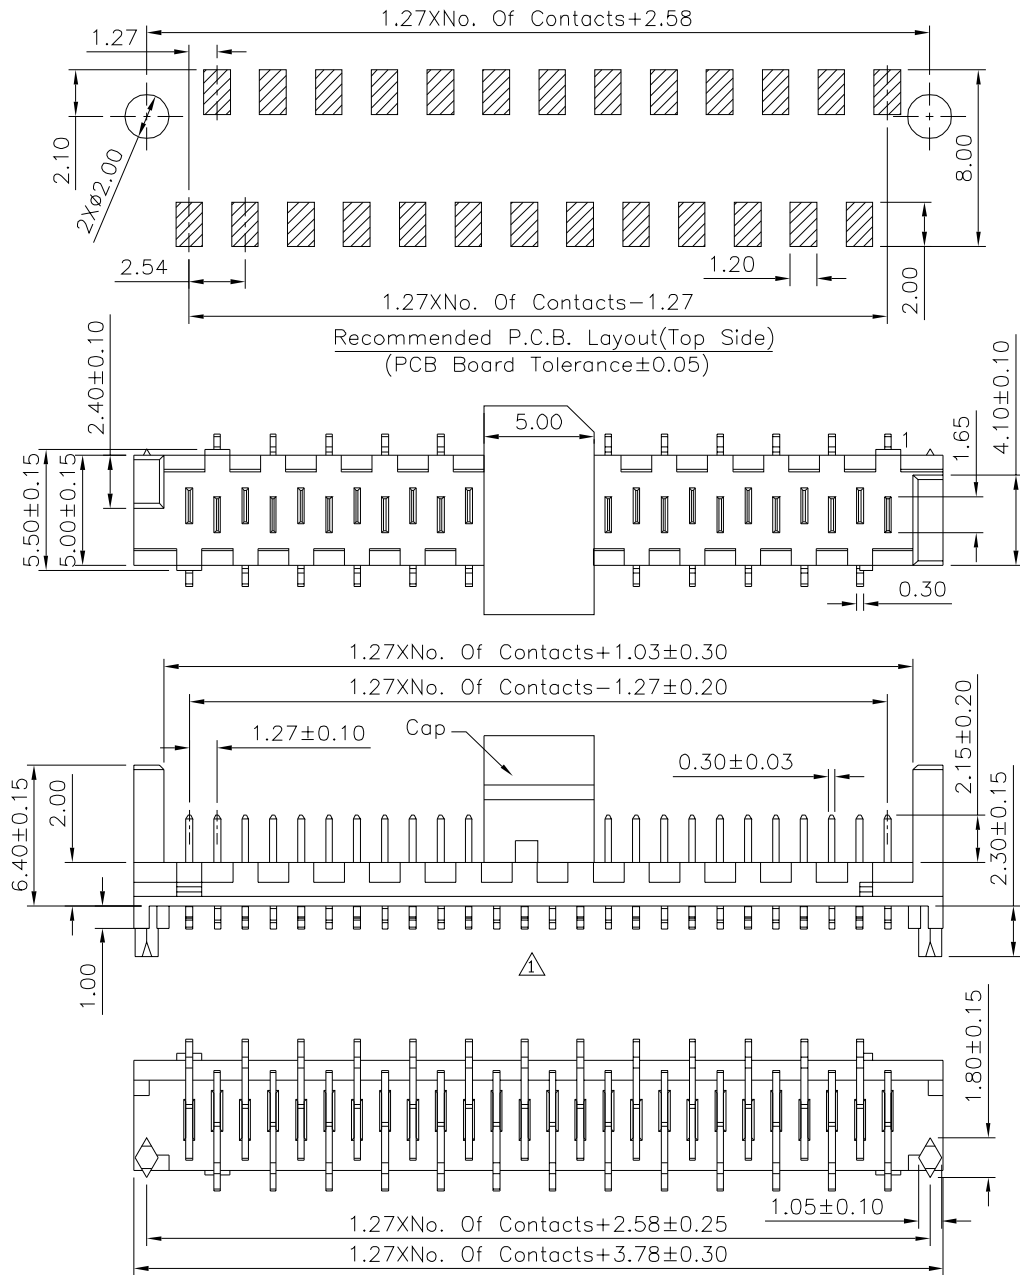

SPECIFICATION

Current Rating:1.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:LCP+30%G.F.(UL94V-0),Black
Contact:Phosphor Bronze,Tin Plated Over Nickel
No. Of Contacts:04,06,08,10,12,14,16,18,20
22,24,26 Contacts

RoHS Compliant



4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

22902

SCALE	NONE
-------	------

NONE	REV.
------	------

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
.X	± 0.40
.XX	± 0.25
.XXX	± 0.15
ANG.	$\pm 3^\circ$

	UNIT
	mm



	A2	Modify Data	HZF	10/17/2018
	A1	Modify Data	HZF	11/25/2016
	A0	NEW RELEASE	HZF	06/27/2013
NO. REV.	REVISIONS		CHK	DATE