

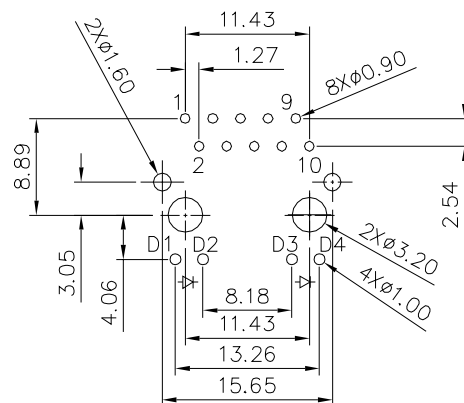
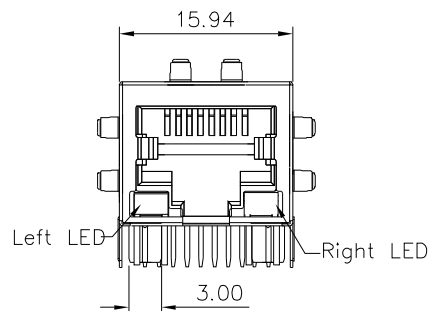


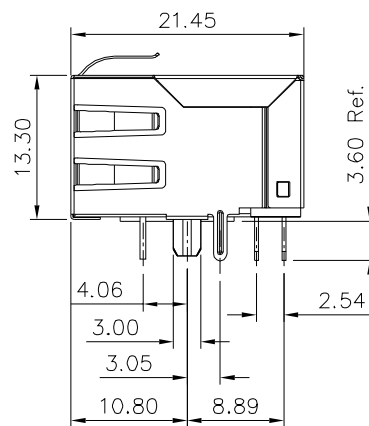

Recommended P.C.B. Layout
(Top View)

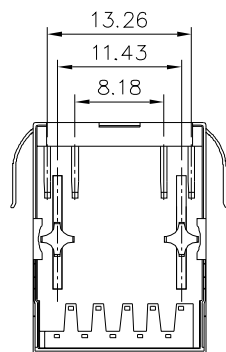

SPECIFICATION

Housing:PBT,(UL94V-0),Black
 Shield:Brass,Nickel Plated
 Contacts:Phosphor Bronze,
 Gold Plated 30u" On Contact Area,
 Tin Plated On Solder Tails,Over Nickel
 Operation Temperature:0°C~+70°C
 Cavity Conforms To Fcc Rules And Regulations
 Part 68,Subpart F.
 RoHS Compliant

LED Color Code Option & Circuit Schematic

Code	Color	Left LED	Right LED
B	Blue	D1	D3
G	Green		
O	Orange	D2	D4
R	Red		
Y	Yellow		

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22906

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.50
 .X ±0.38
 .XX ±0.25
 .XXX ±0.10
 ANG. ±3°

SCALE


NONE

REV.

A0

UNIT

mm



NO. REV.

A0 NEW RELEASE



REVISIONS

CHK

DATE

11/30/2024

Connector Solder Side RJ45 Contact Side

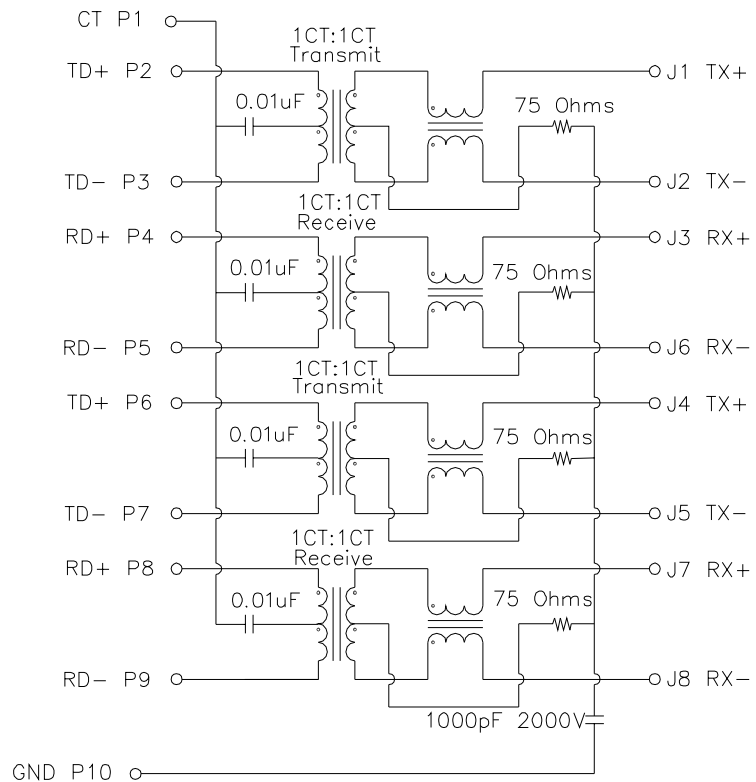

SPECIFICATION

- Test Notes:(25±5°C)
- 1.TR:(100KHz,0.1V);
Input To Output=1:1±3%
 - 2.LX:(100KHz,100mV,8mA,DC Bias)
350uH Min.
 - 3.DCR:
1.2 Ohms Max.
 - 4.Hipot:
Input To Output=1500V AC For 60 Seconds
 - 5.Insertion Loss:
-1.0dB Max. At 0.3MHz To 100MHz;
 - 6.Return Loss:
-20dB Min. At 1MHz To 30MHz;
-15dB Min. At 30MHz To 60MHz
-10dB Min. At 60MHz To 80MHz
 - 7.Cross Talk:
-30dB Min. At 1MHz To 100MHz
 - 8.Common To Common Mode Rejection:
-30dB Min. At 1MHz To 100MHz

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

22906

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.50
.X ±0.38
.XX ±0.25
.XXX ±0.10
ANG. ±3°

UNIT

mm



NO. REV.

A0 NEW RELEASE

REVISIONS

CHK

DATE

0