

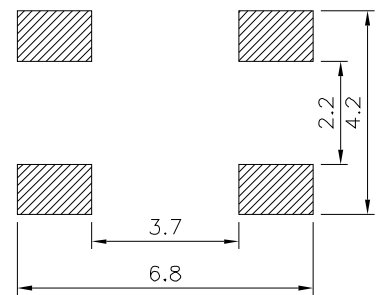
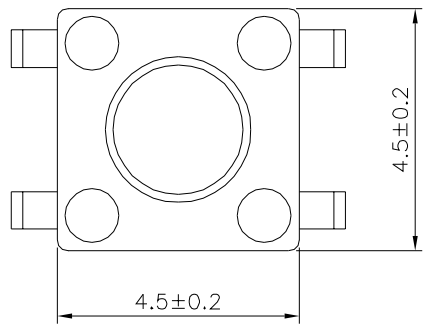


SPECIFICATION



Rating:DC 12V 50mA
Contact Resistance:100 Milliohms Max.
Withstand Voltage:250V AC(50Hz Or 60Hz)/Minute
Insulation Resistance:100 Megaohms Min.
At 100V DC/Minute
Operation Temperature:-20°C~+70°C
Operating Force:100g
RoHS Compliant



Recommended P.C.B. Layout

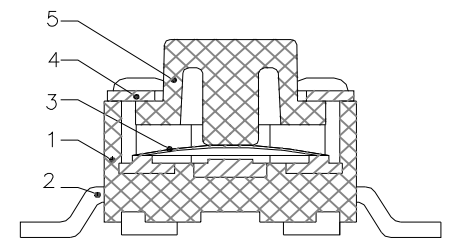

Circuit Diagram

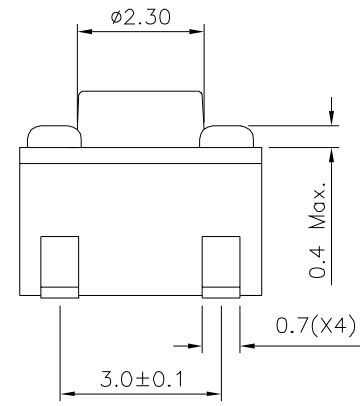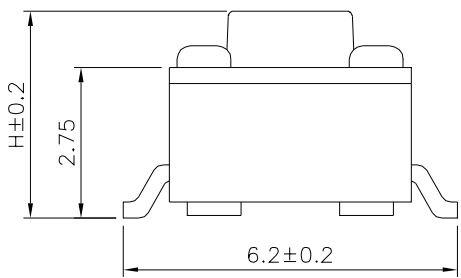

Item No.	Dim. H
--	Height 3.8mm
--	Height 4.3mm
--	Height 4.8mm
22912	Height 5.0mm
--	Height 6.0mm
--	Height 7.0mm
--	Height 8.0mm
--	Height 9.5mm

No.	Description	Material	Remark
1	Base	PA6T	Black
2	Terminal	Brass	Silver Plated
3	Contact	Stainless Steel	Silver Plated
4	Cover	Steel	CuSn Plated
5	Stem	PA6T	Black

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 22912		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.20 .XX ±0.20							
		MEI									
		CHECKED BY									
		DRAWING BY									
		LZX									
SCALE	NONE	REV.	A0	UNIT mm				A0	NEW RELEASE	HZF	12/10/2024
						NO. REV.		REVISIONS	CHK	DATE	