

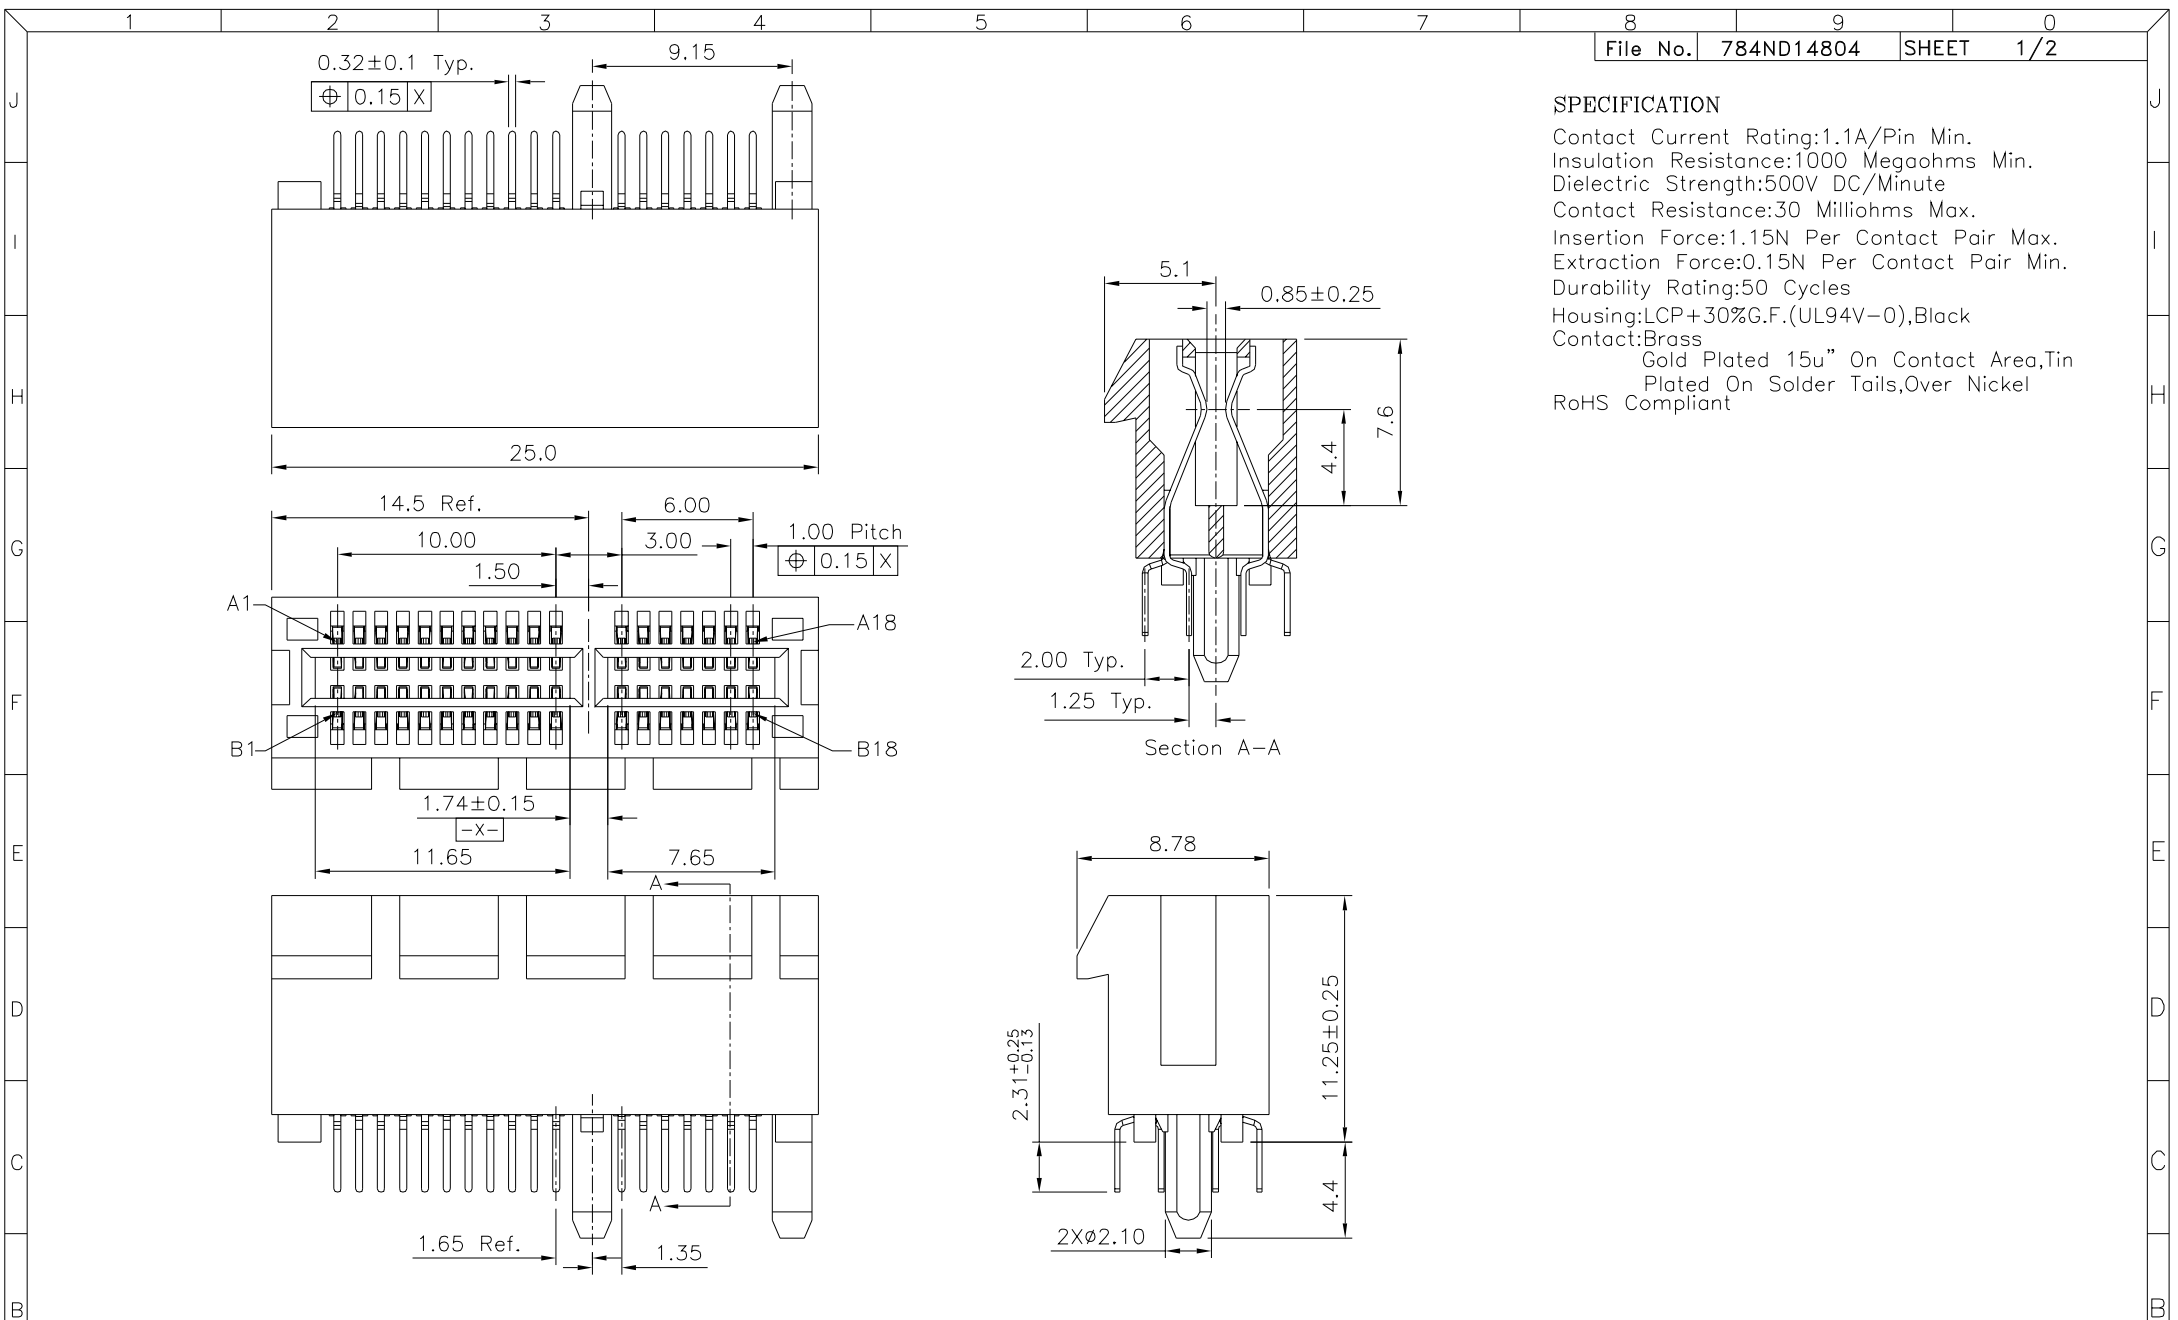


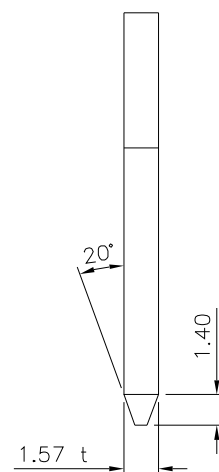


SPECIFICATION
Contact Current Rating:1.1A/Pin Min.
Insulation Resistance:1000 Megaohms Min.
Dielectric Strength:500V DC/Minute
Contact Resistance:30 Milliohms Max.
Insertion Force:1.15N Per Contact Pair Max.
Extraction Force:0.15N Per Contact Pair Min.
Durability Rating:50 Cycles
Housing:LCP+30%G.F.(UL94V-0),Black
Contact:Brass
Gold Plated 15u" On Contact Area,Tin
Plated On Solder Tails,Over Nickel
RoHS Compliant


4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.	DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 X.* ±2.0° .X ±0.38 .X* ±1.0° .XX ±0.25 .XXX ±0.15								
	22916		MEI										
			CHECKED BY										
			HZF										
			DRAWING BY										
		LZX											
SCALE		NONE		REV.	A0	UNIT			A0	NEW RELEASE		HZF	10/14/2022
								NO.	REV.	REVISIONS		CHK	DATE
1	2	3	4	5	6	7	8	9	0				

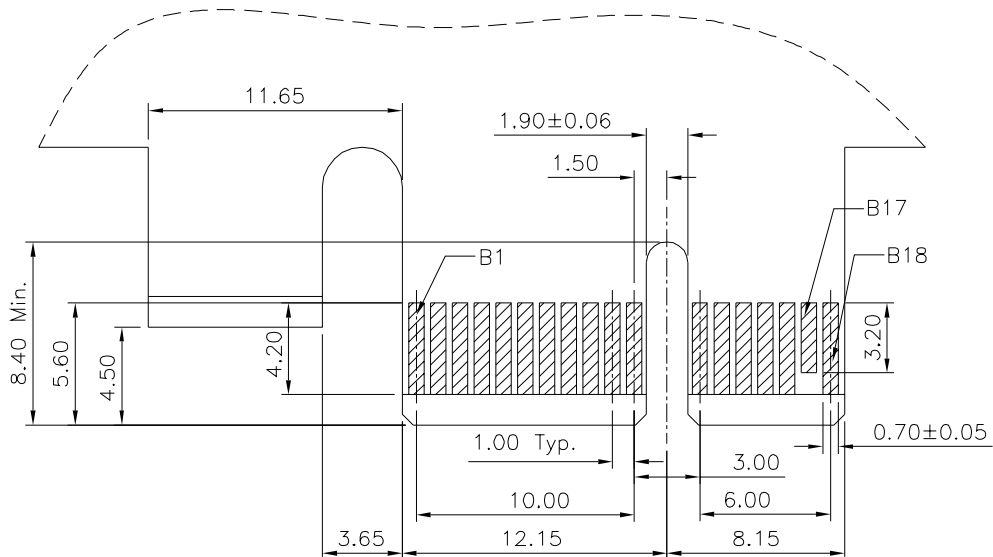

Recommended Edge Card Pattern(Primary Side)

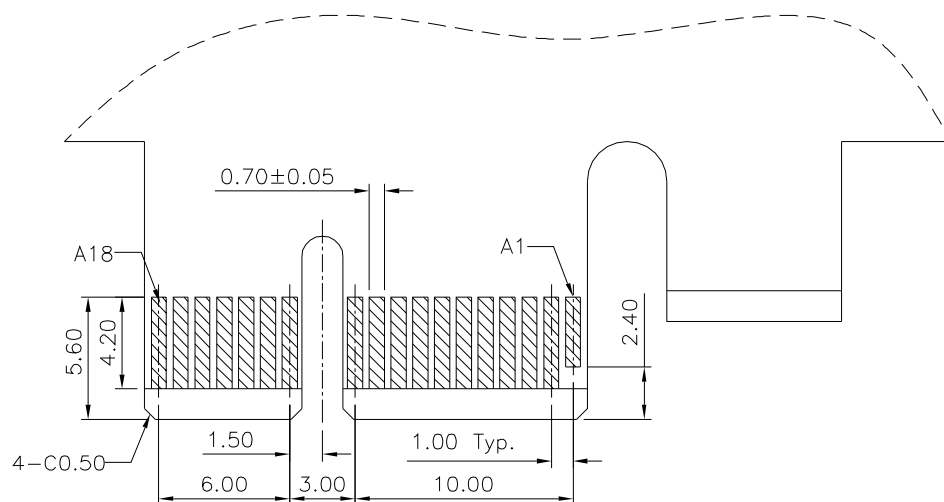

Recommended Edge Card Pattern(Secondary Side)

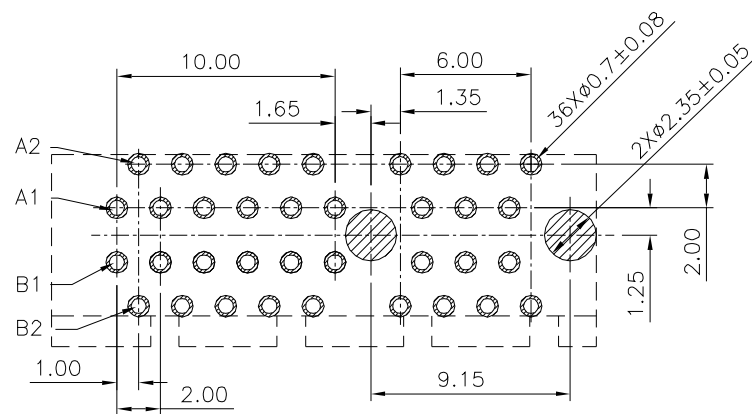

Recommended P.C.B. Layout(Component Side)
(PCB Board Tolerance±0.05)

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22916

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


LZX

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50 X.* ±2.0°
.X ±0.38 .X.* ±1.0°
.XX ±0.25
.XXX ±0.15

UNIT
mm



NO. REV.

NEW RELEASE

REVISIONS

CHK

DATE

10/14/2022